



ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

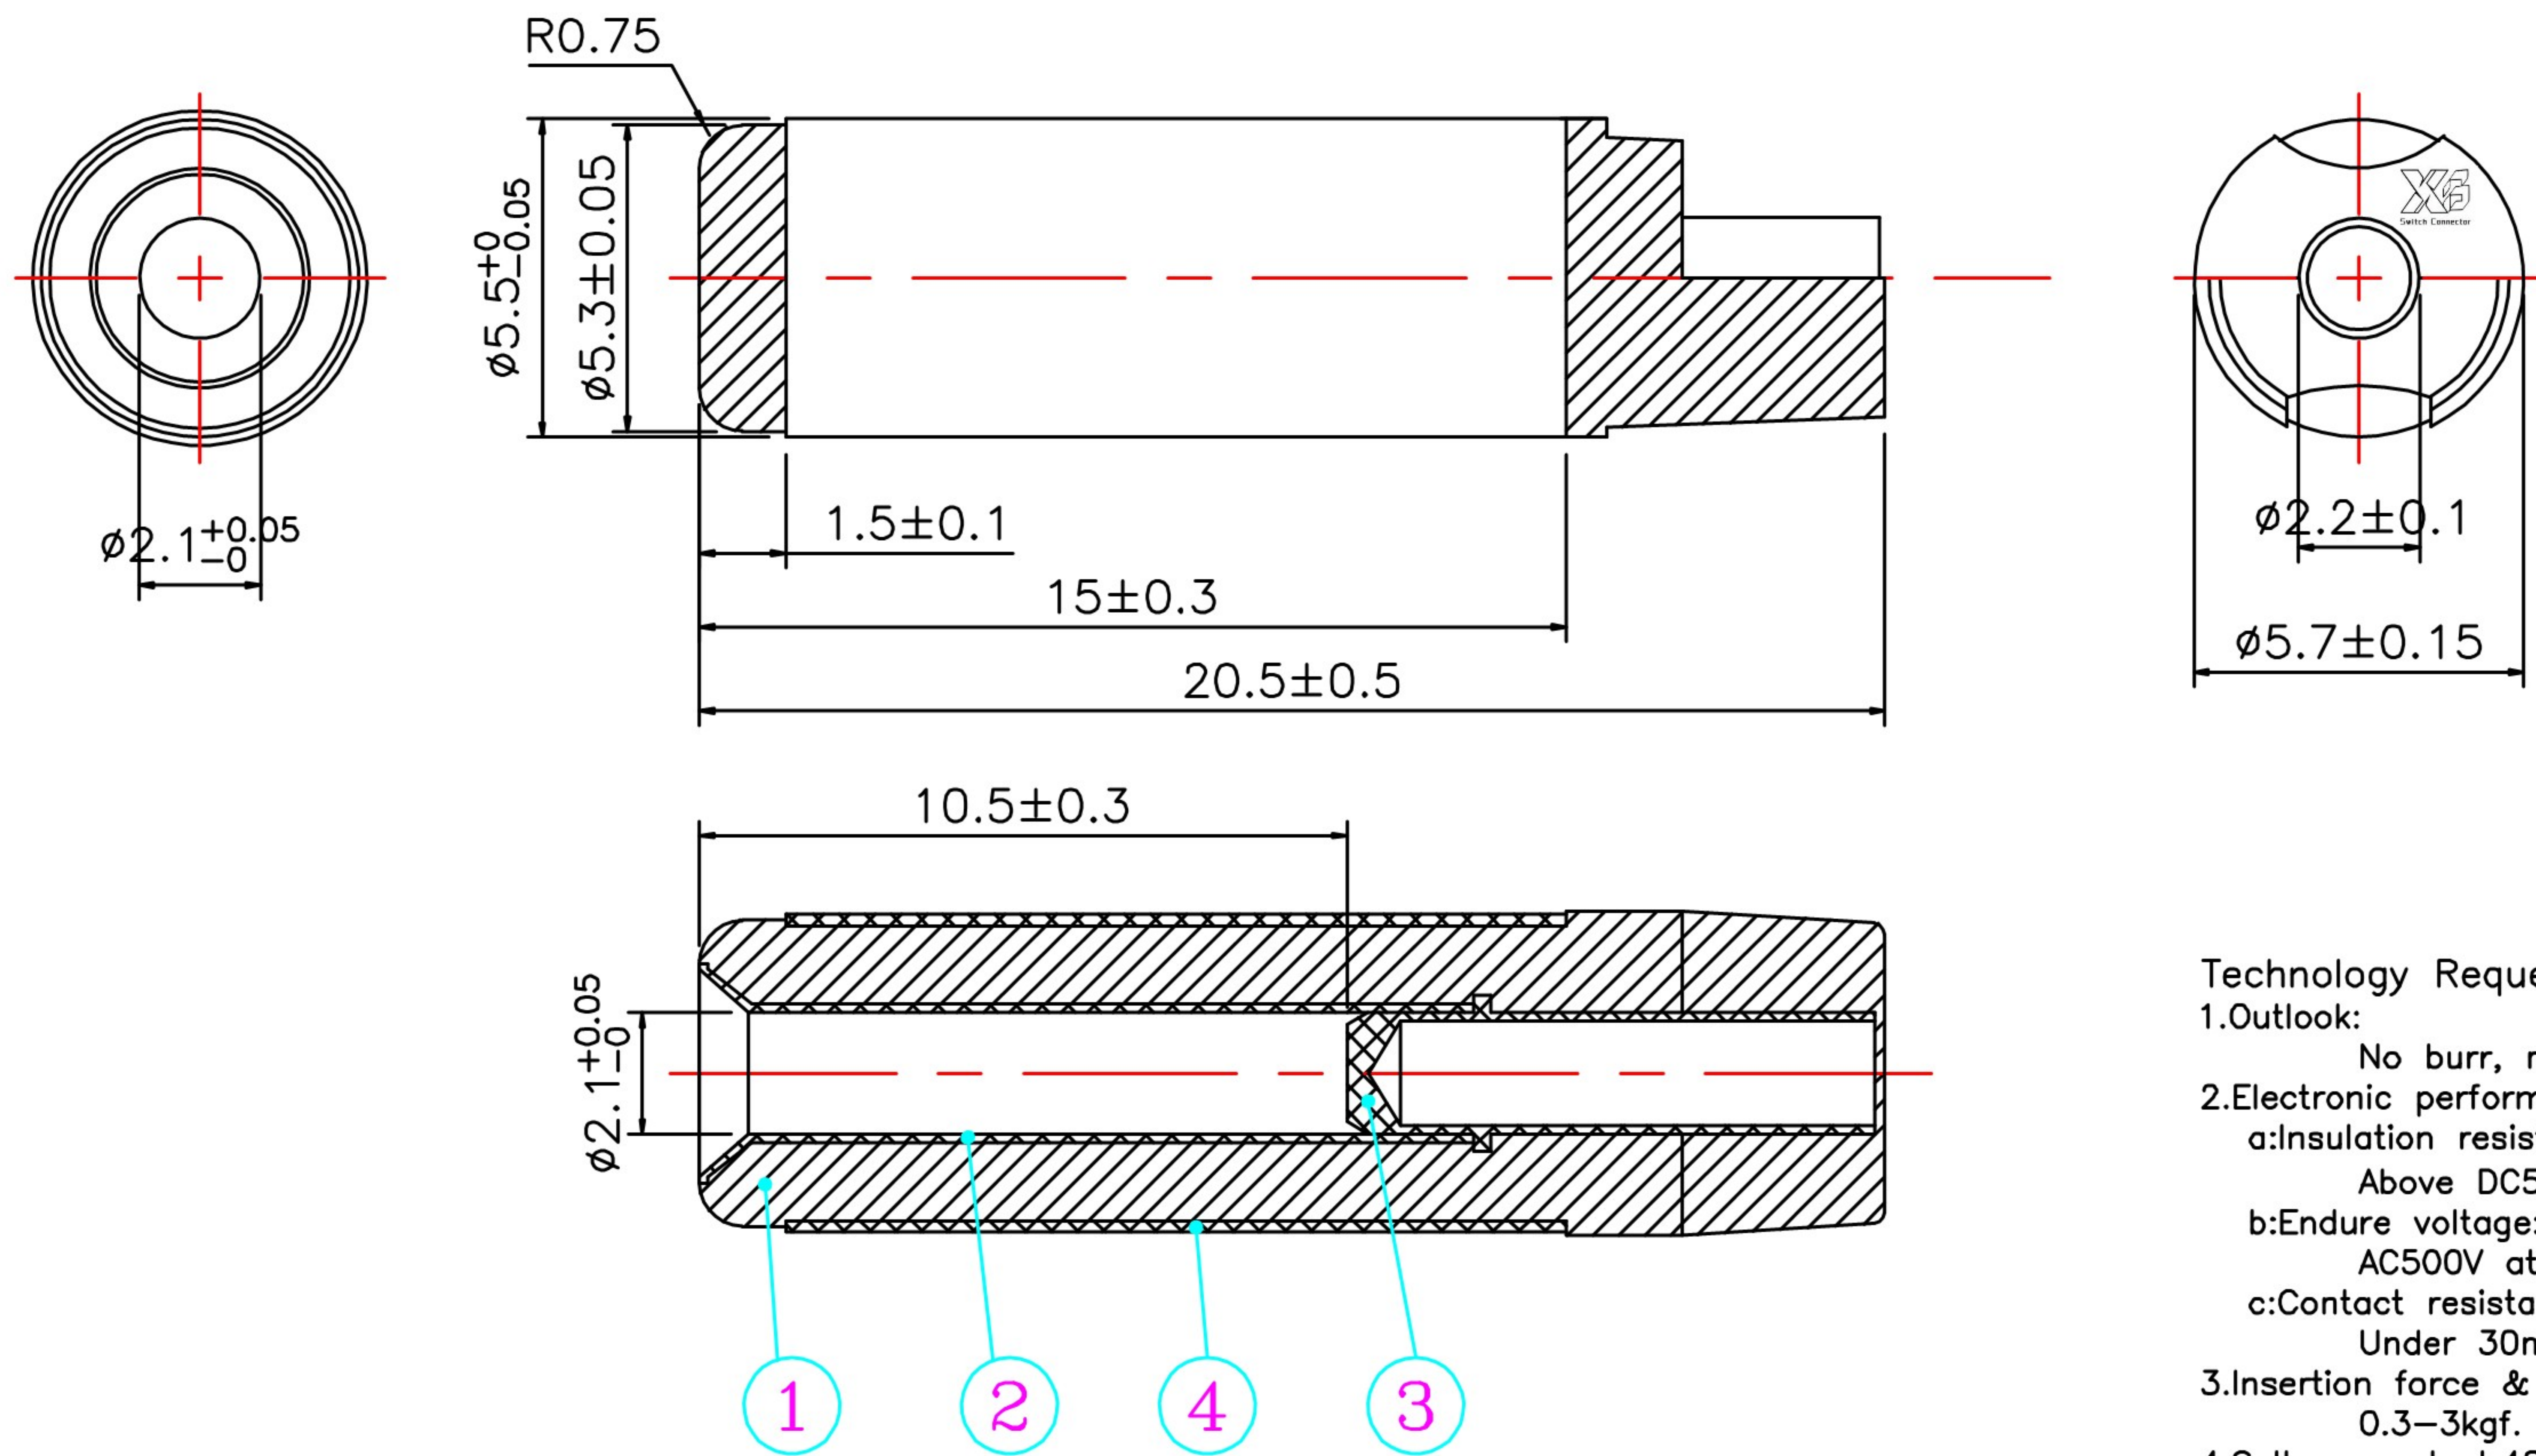

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3—3kgf.
- 4.Salt spray test:48H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

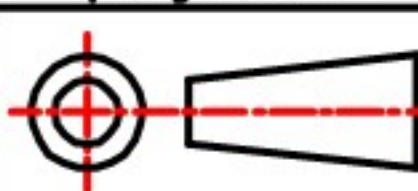单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
			6														
比例 Scale	5:1	xx.:±0.3	5				June	杨义邦	李莹峰	规格 DESCRIPTION: DC PLUG ø5.5*2.1*20.5 品名 P/N: 5521DR205 图号 DRAWN NO: CP-02-0025							
			4	外管	H65	Ni 2~5um											
视图 Third angle projection		x.x:±0.1	3	后心轴	C2680	Ni 2~5um											
			2	喇叭口	H65	Ni 2~5um											
			1	PLASTIC	ABS	BLACK											
		.xx:±0.05	NO.	PART	MATERIAL	PLATING											
1		2		3		4		5		6		7		8		9	