
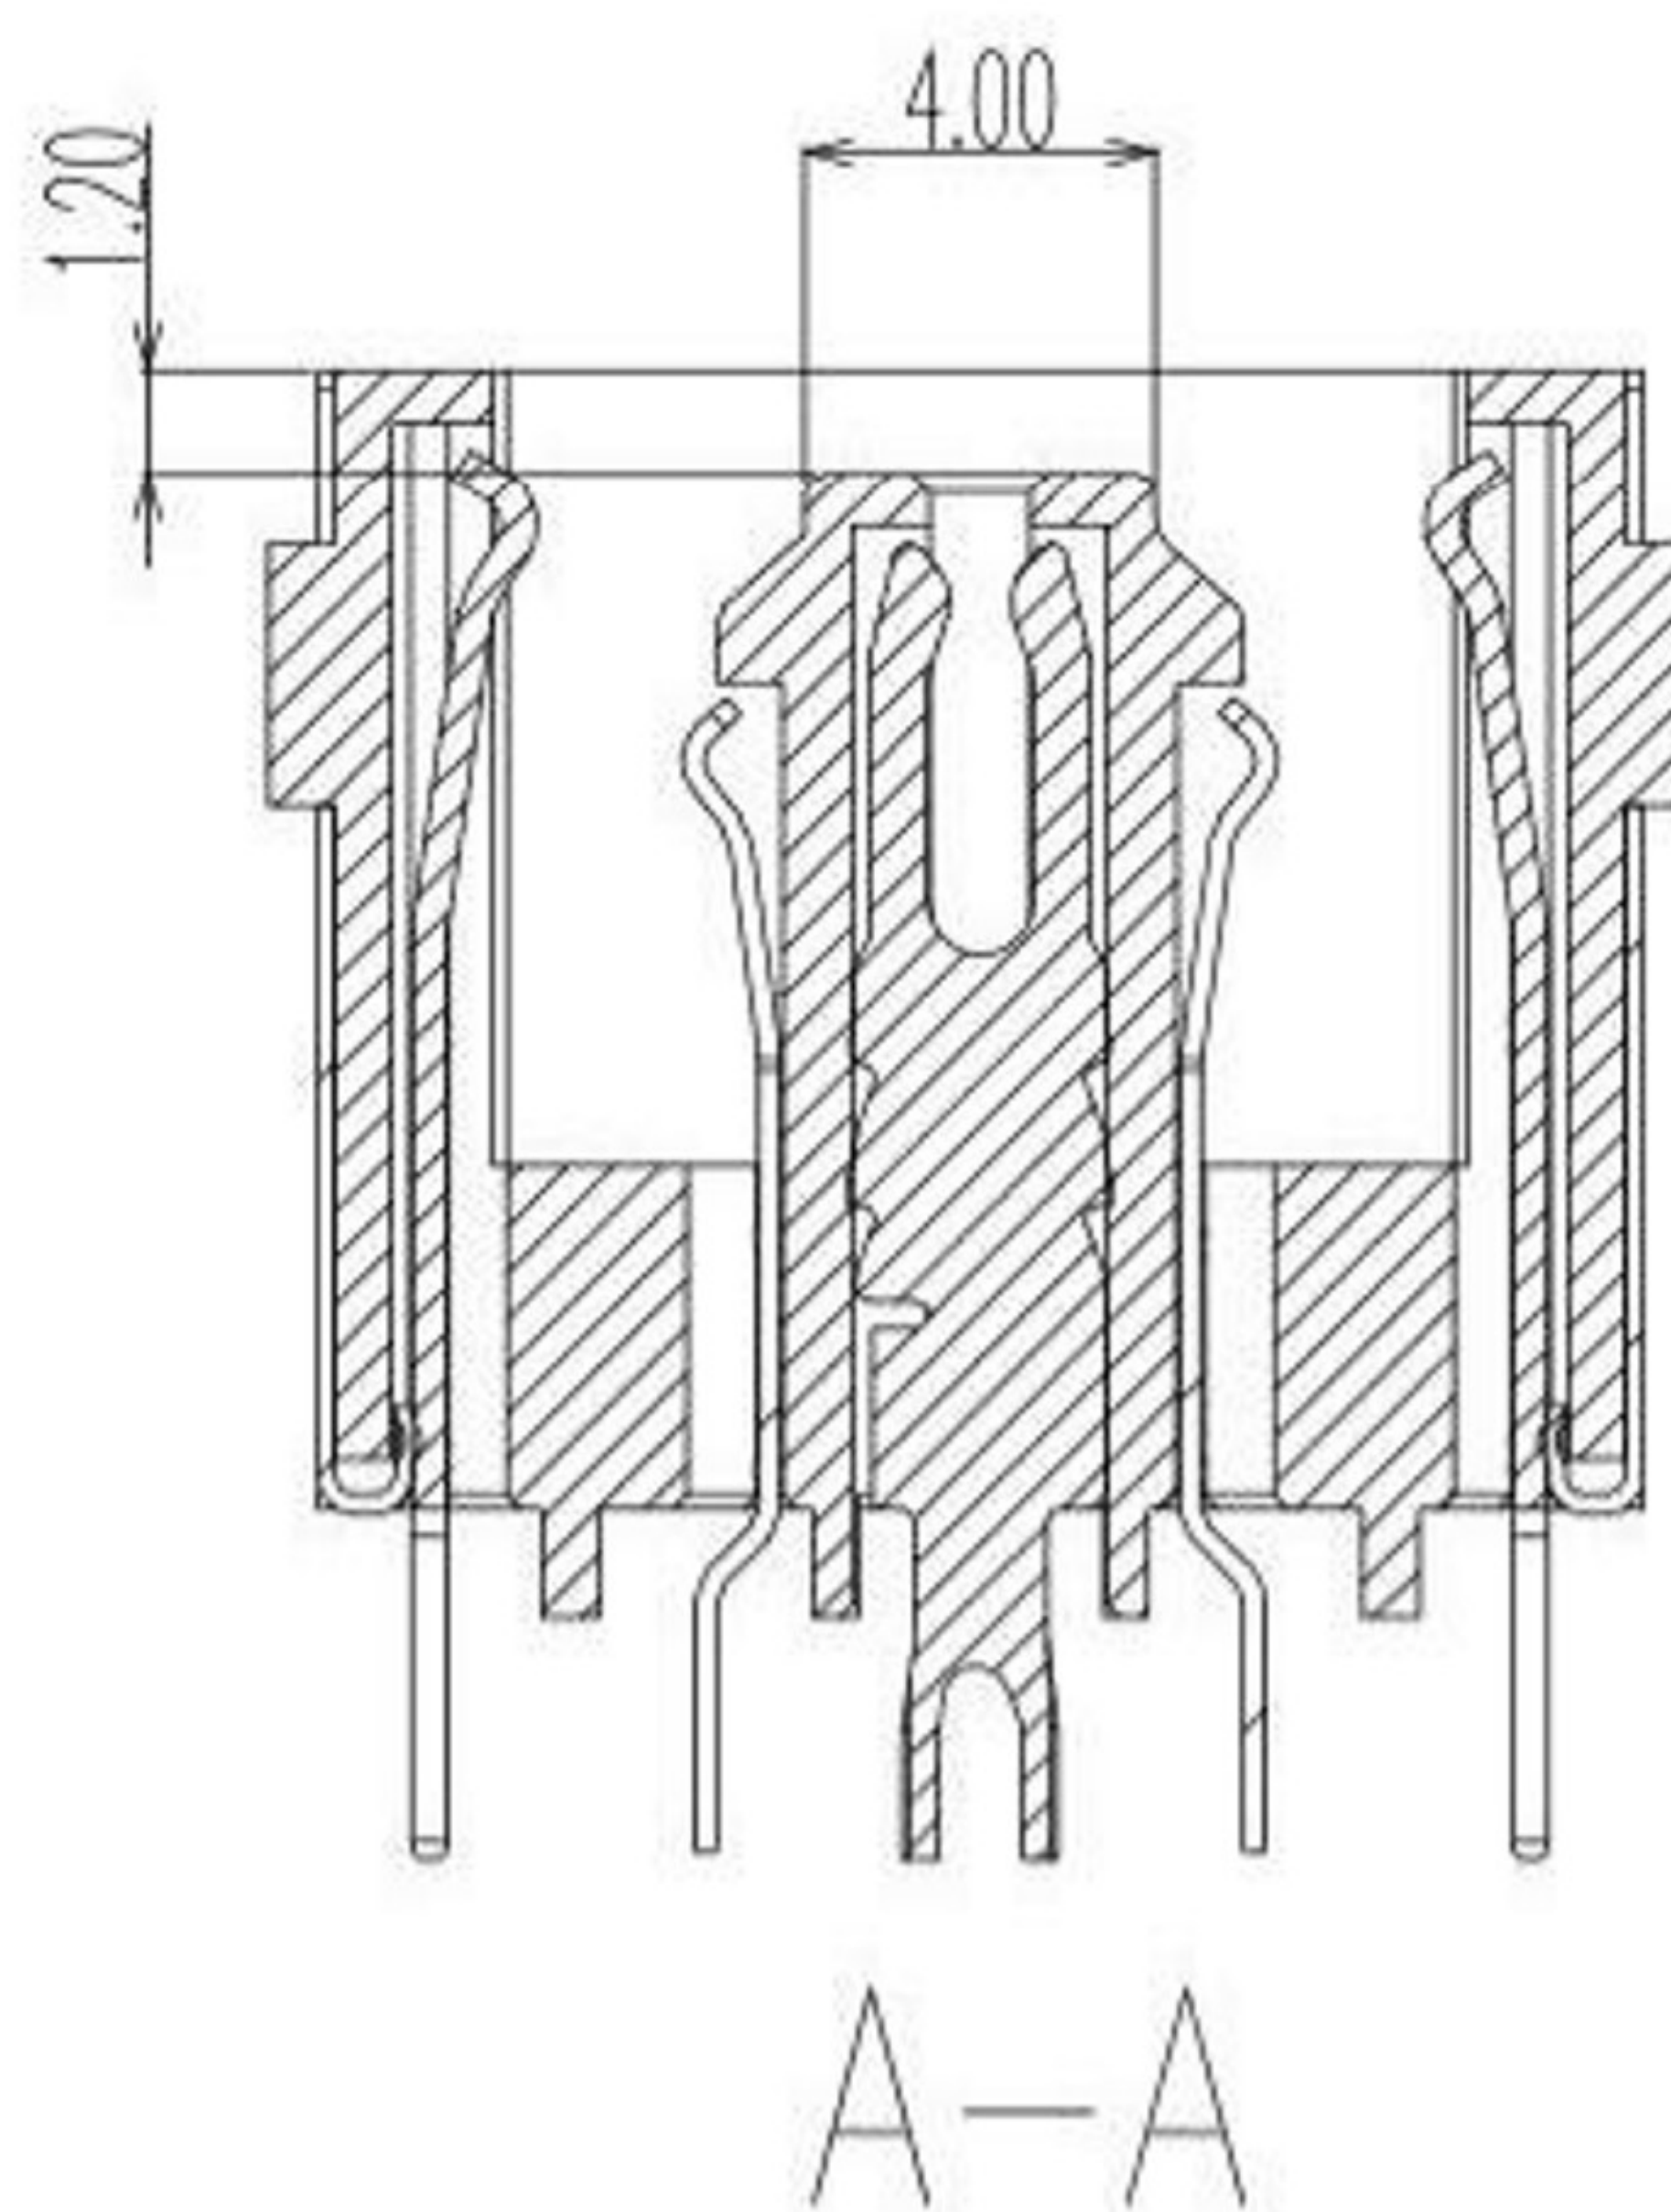
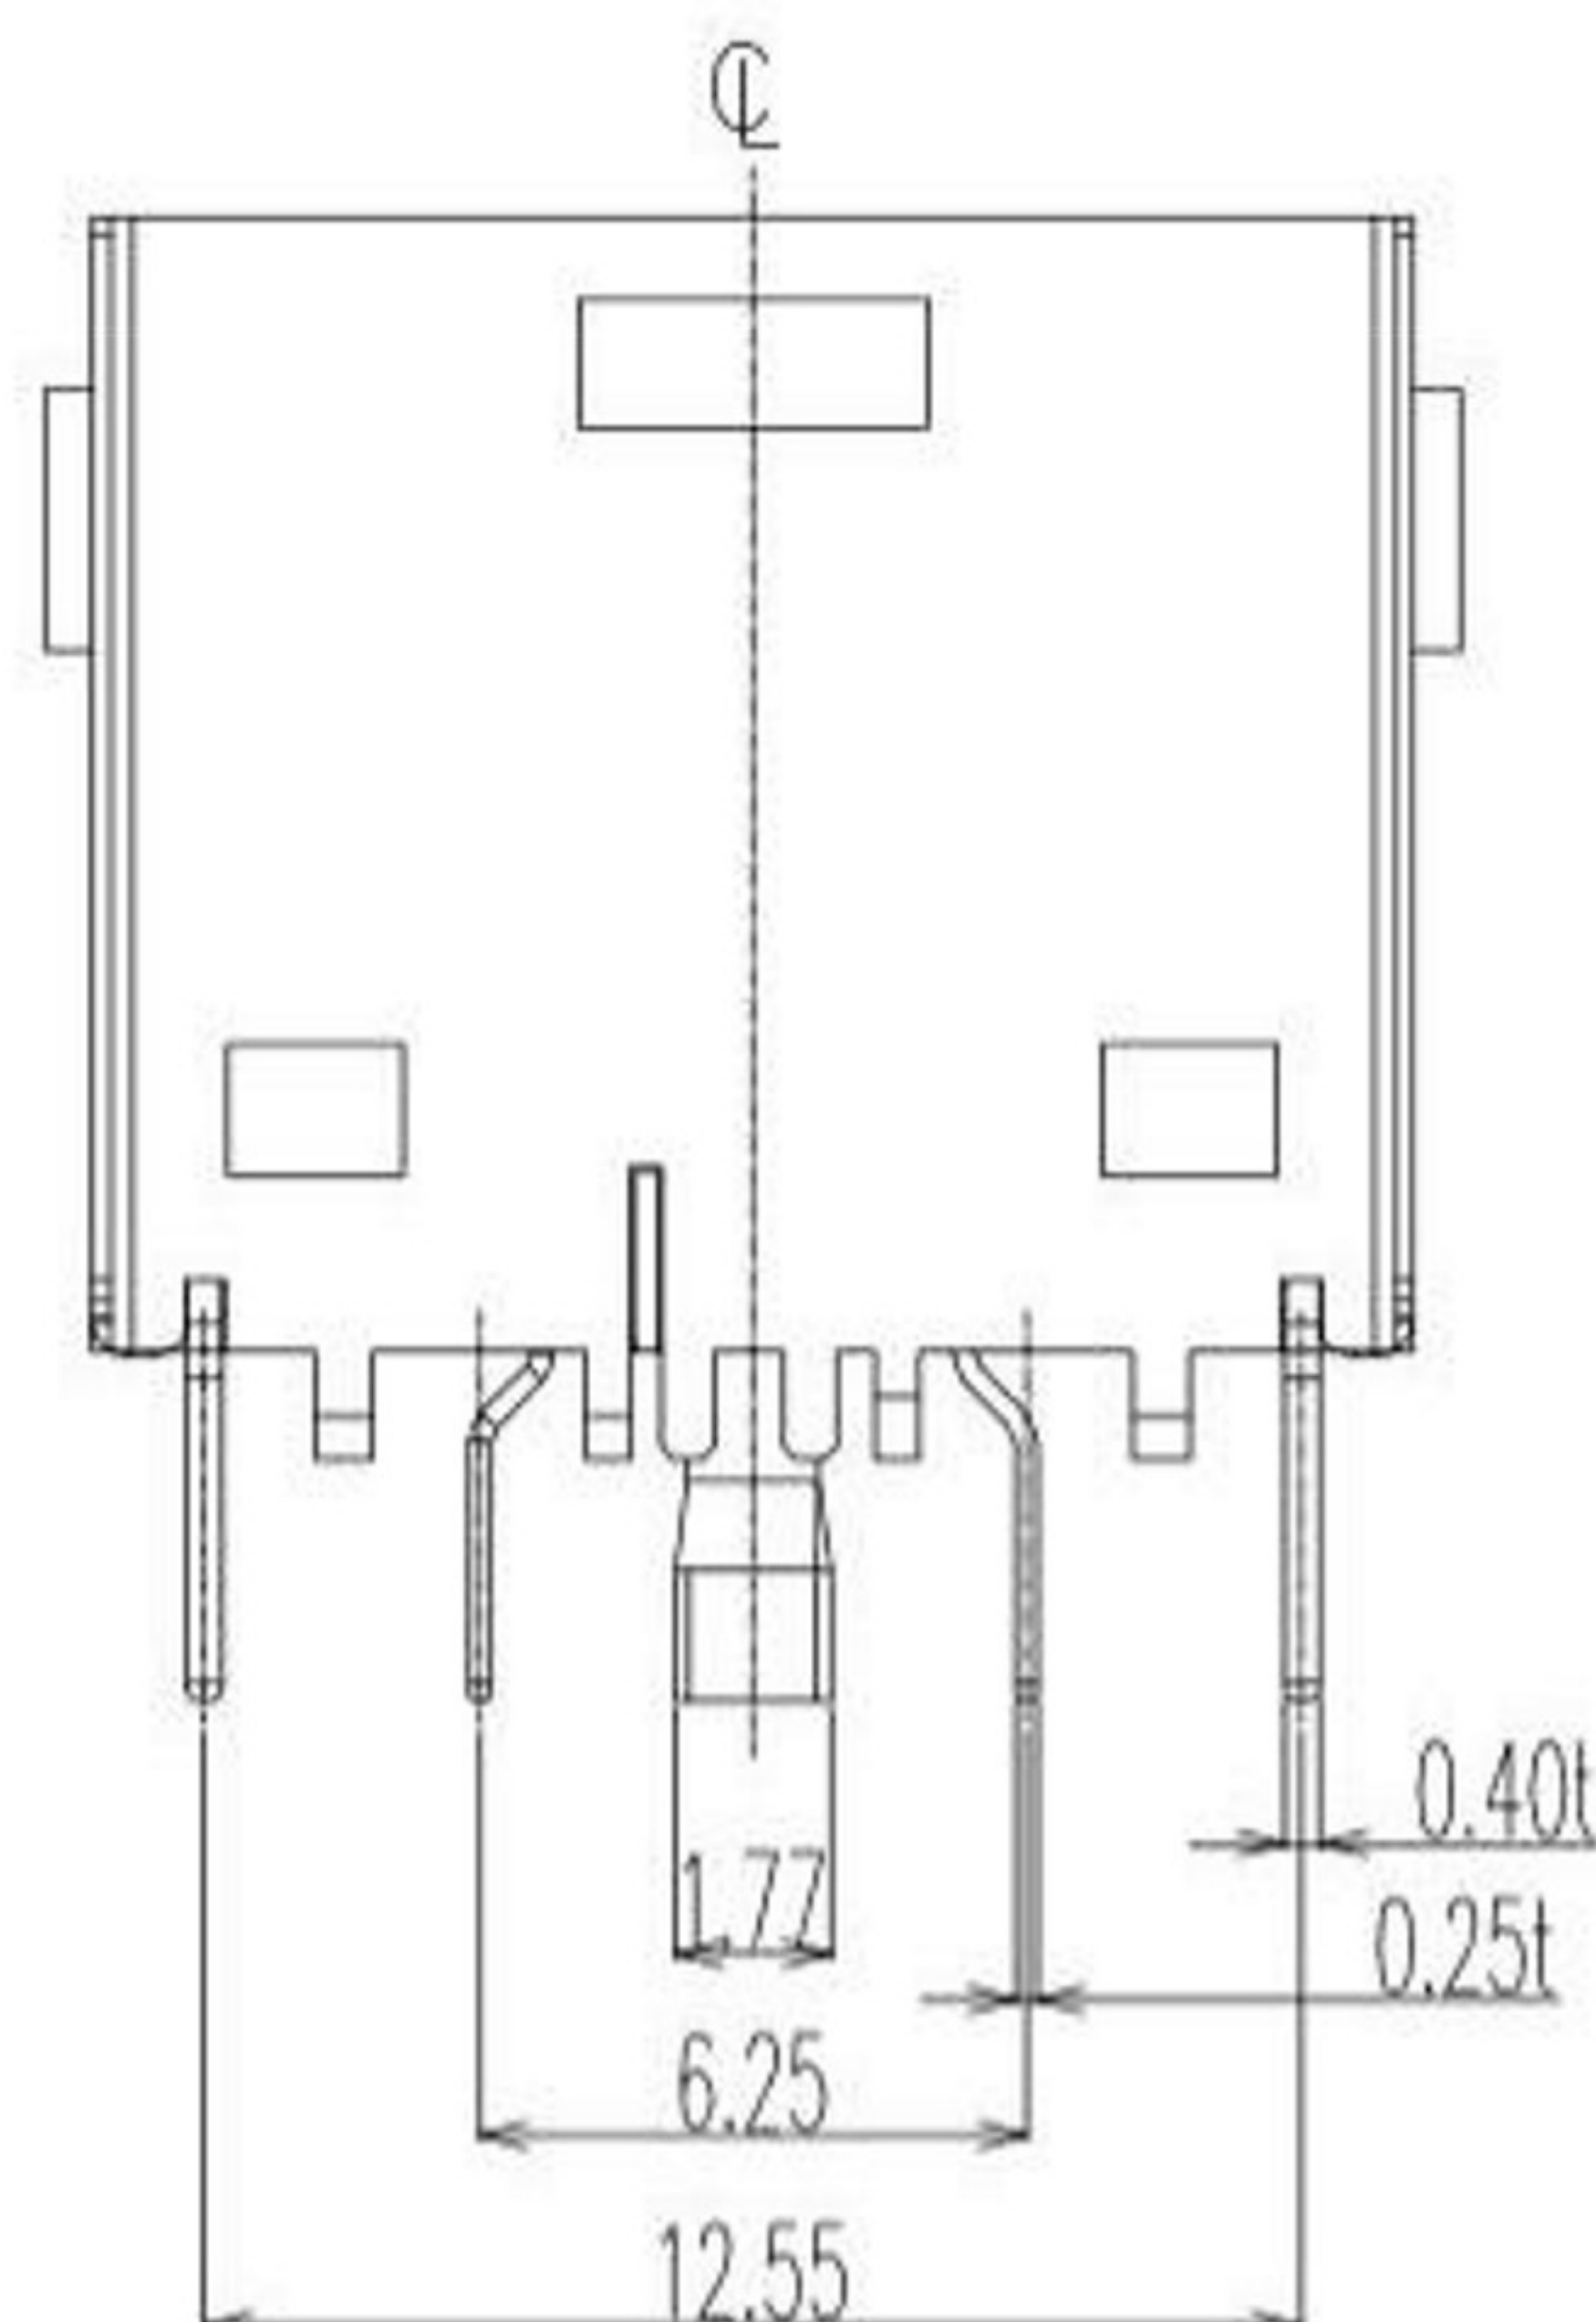
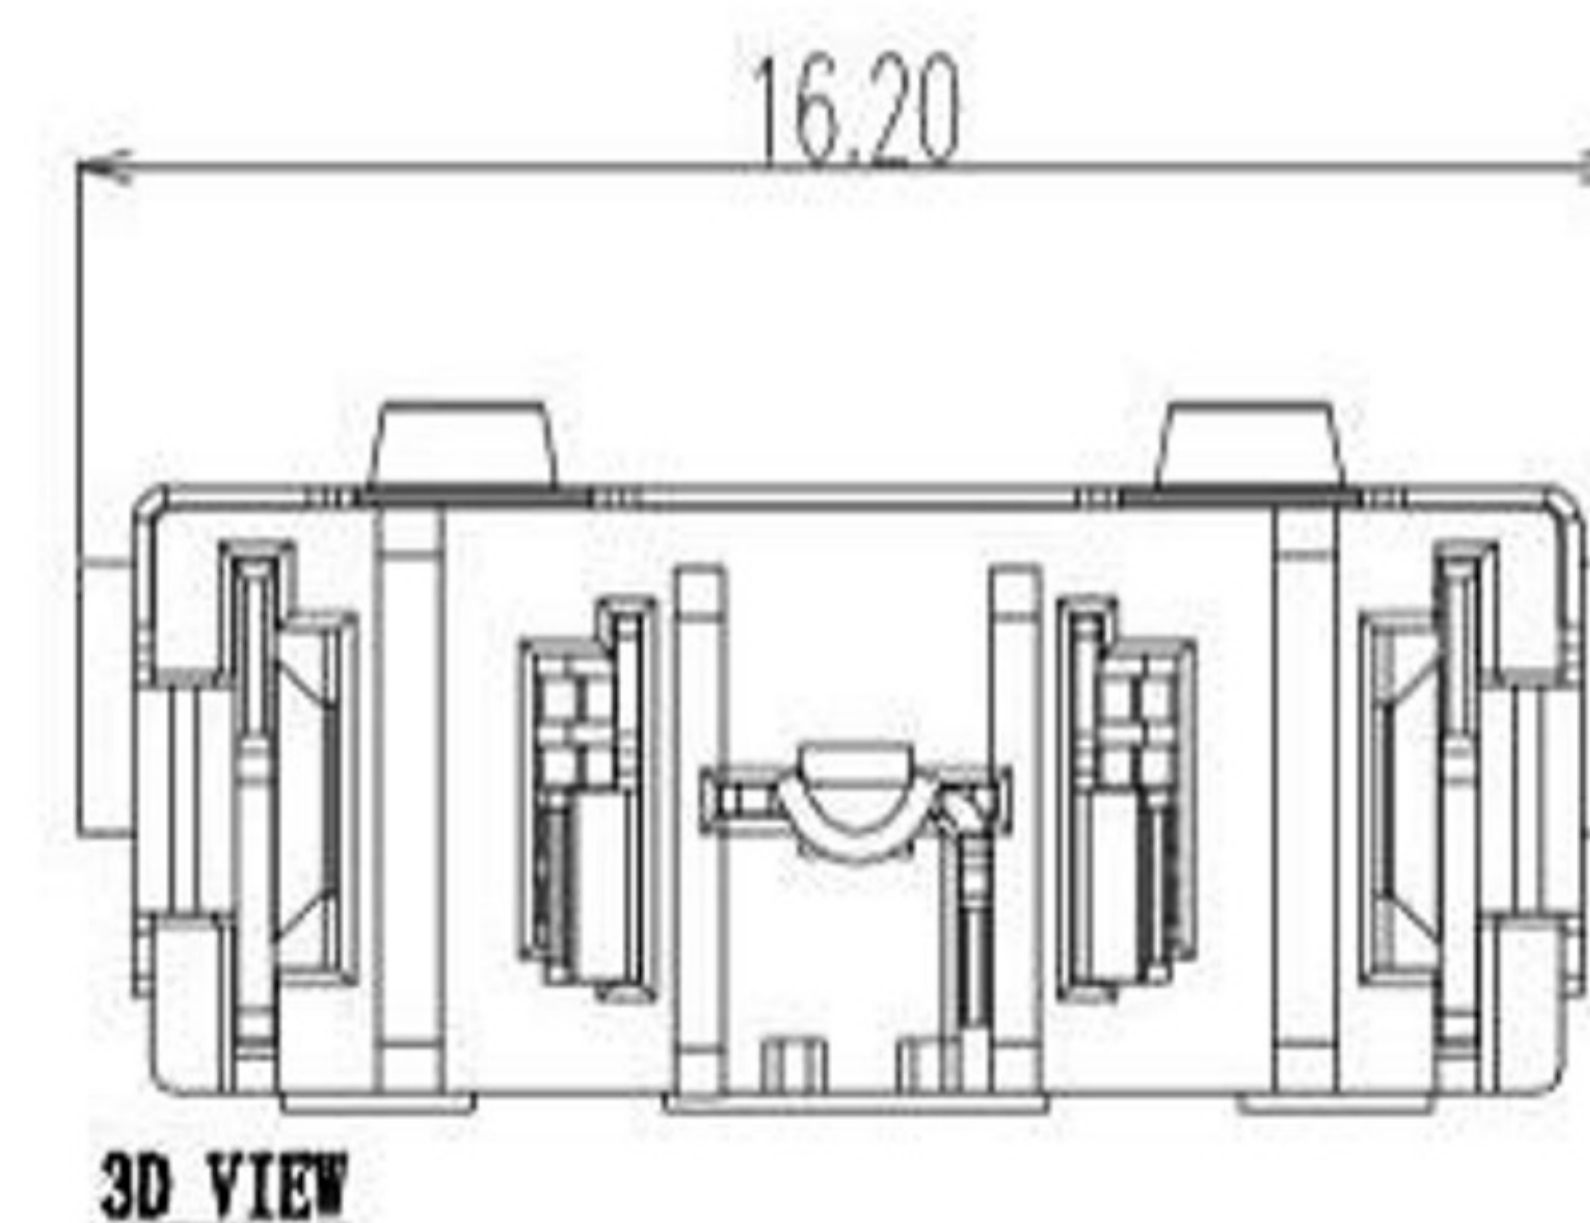
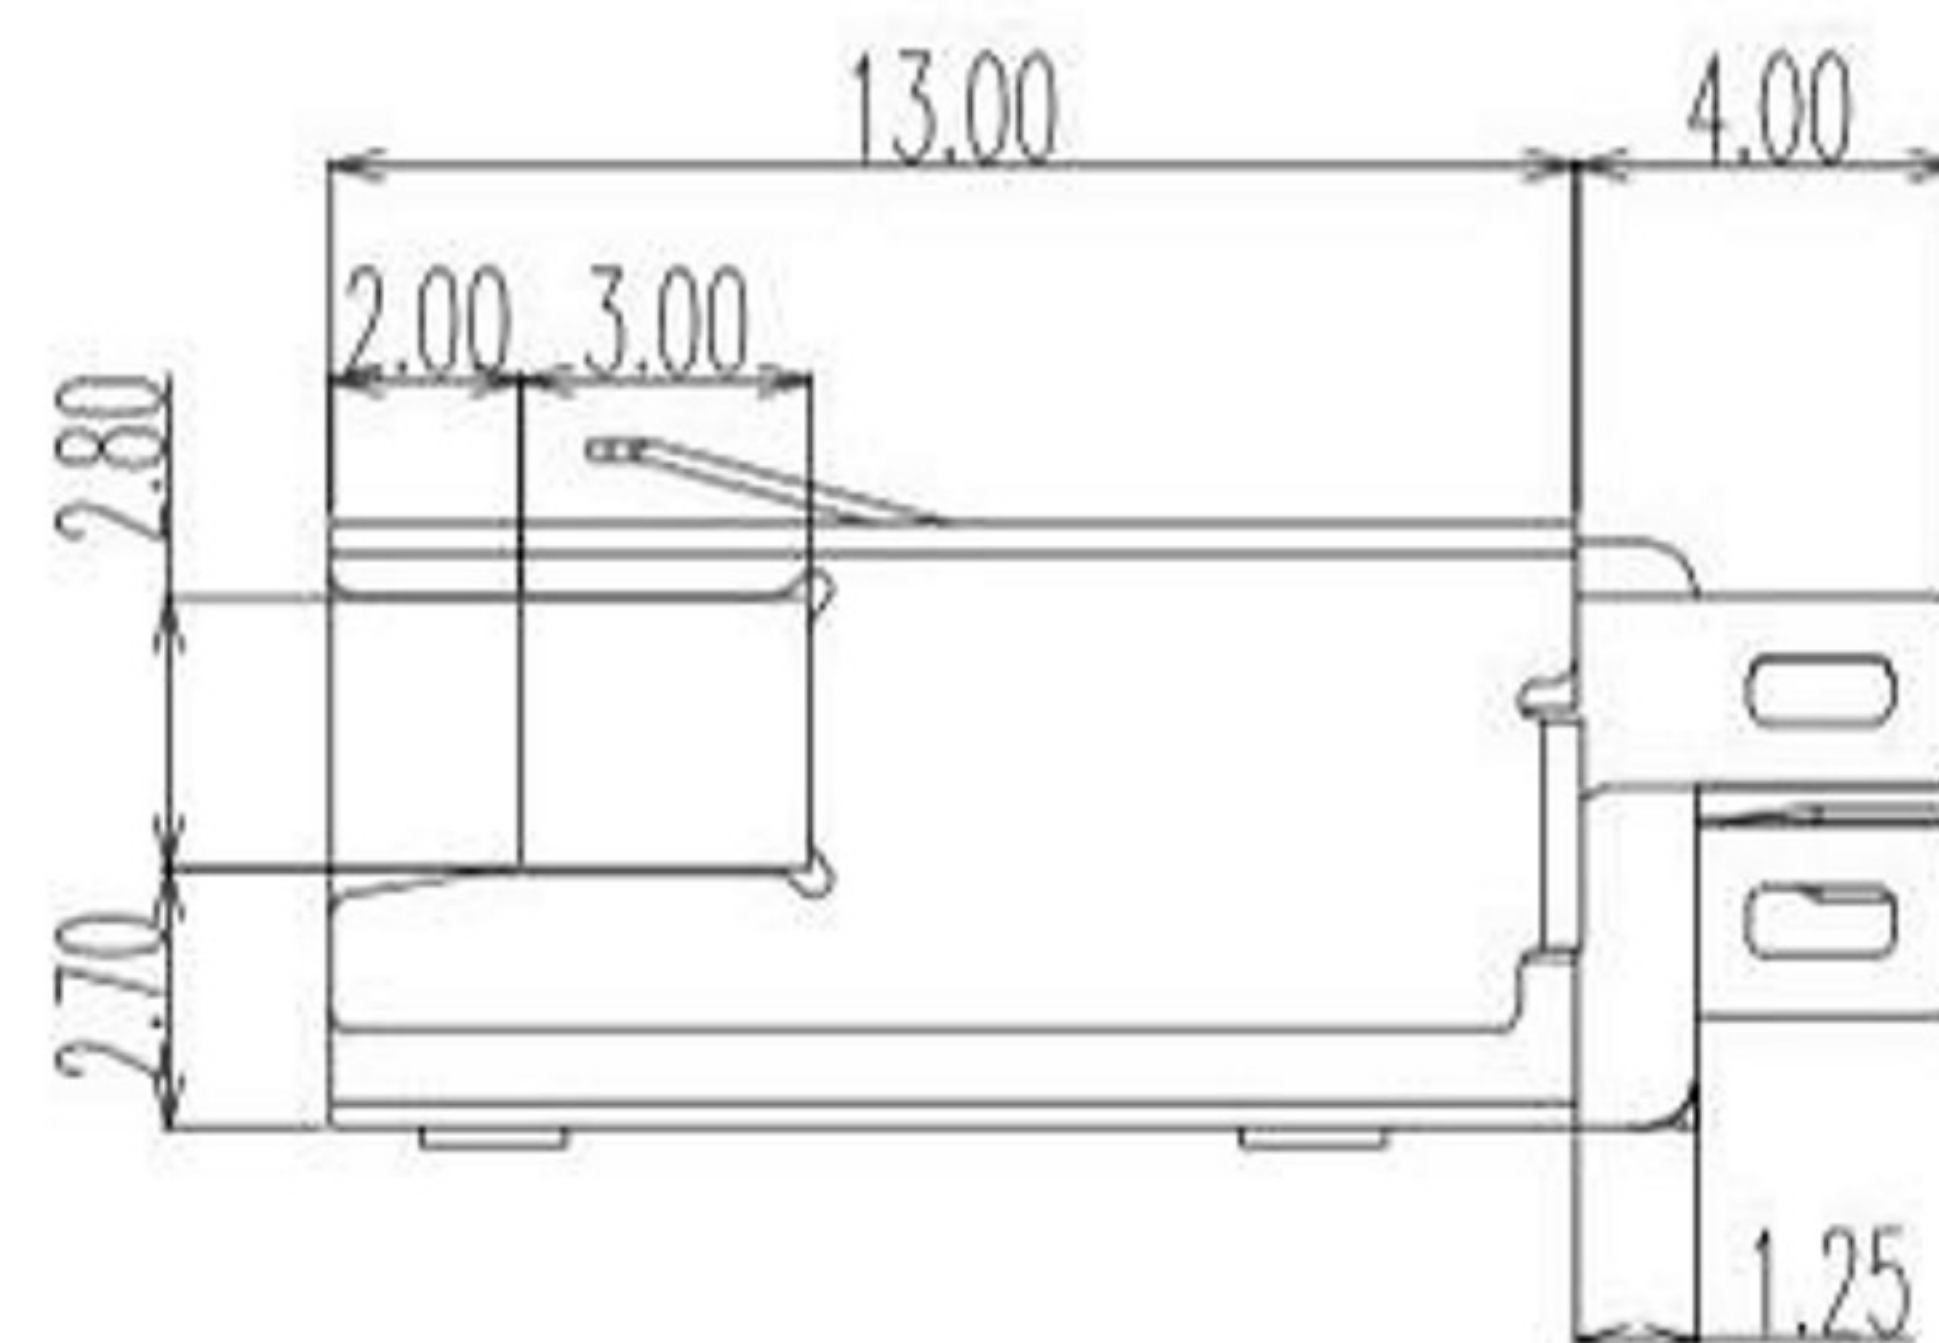


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.05.12

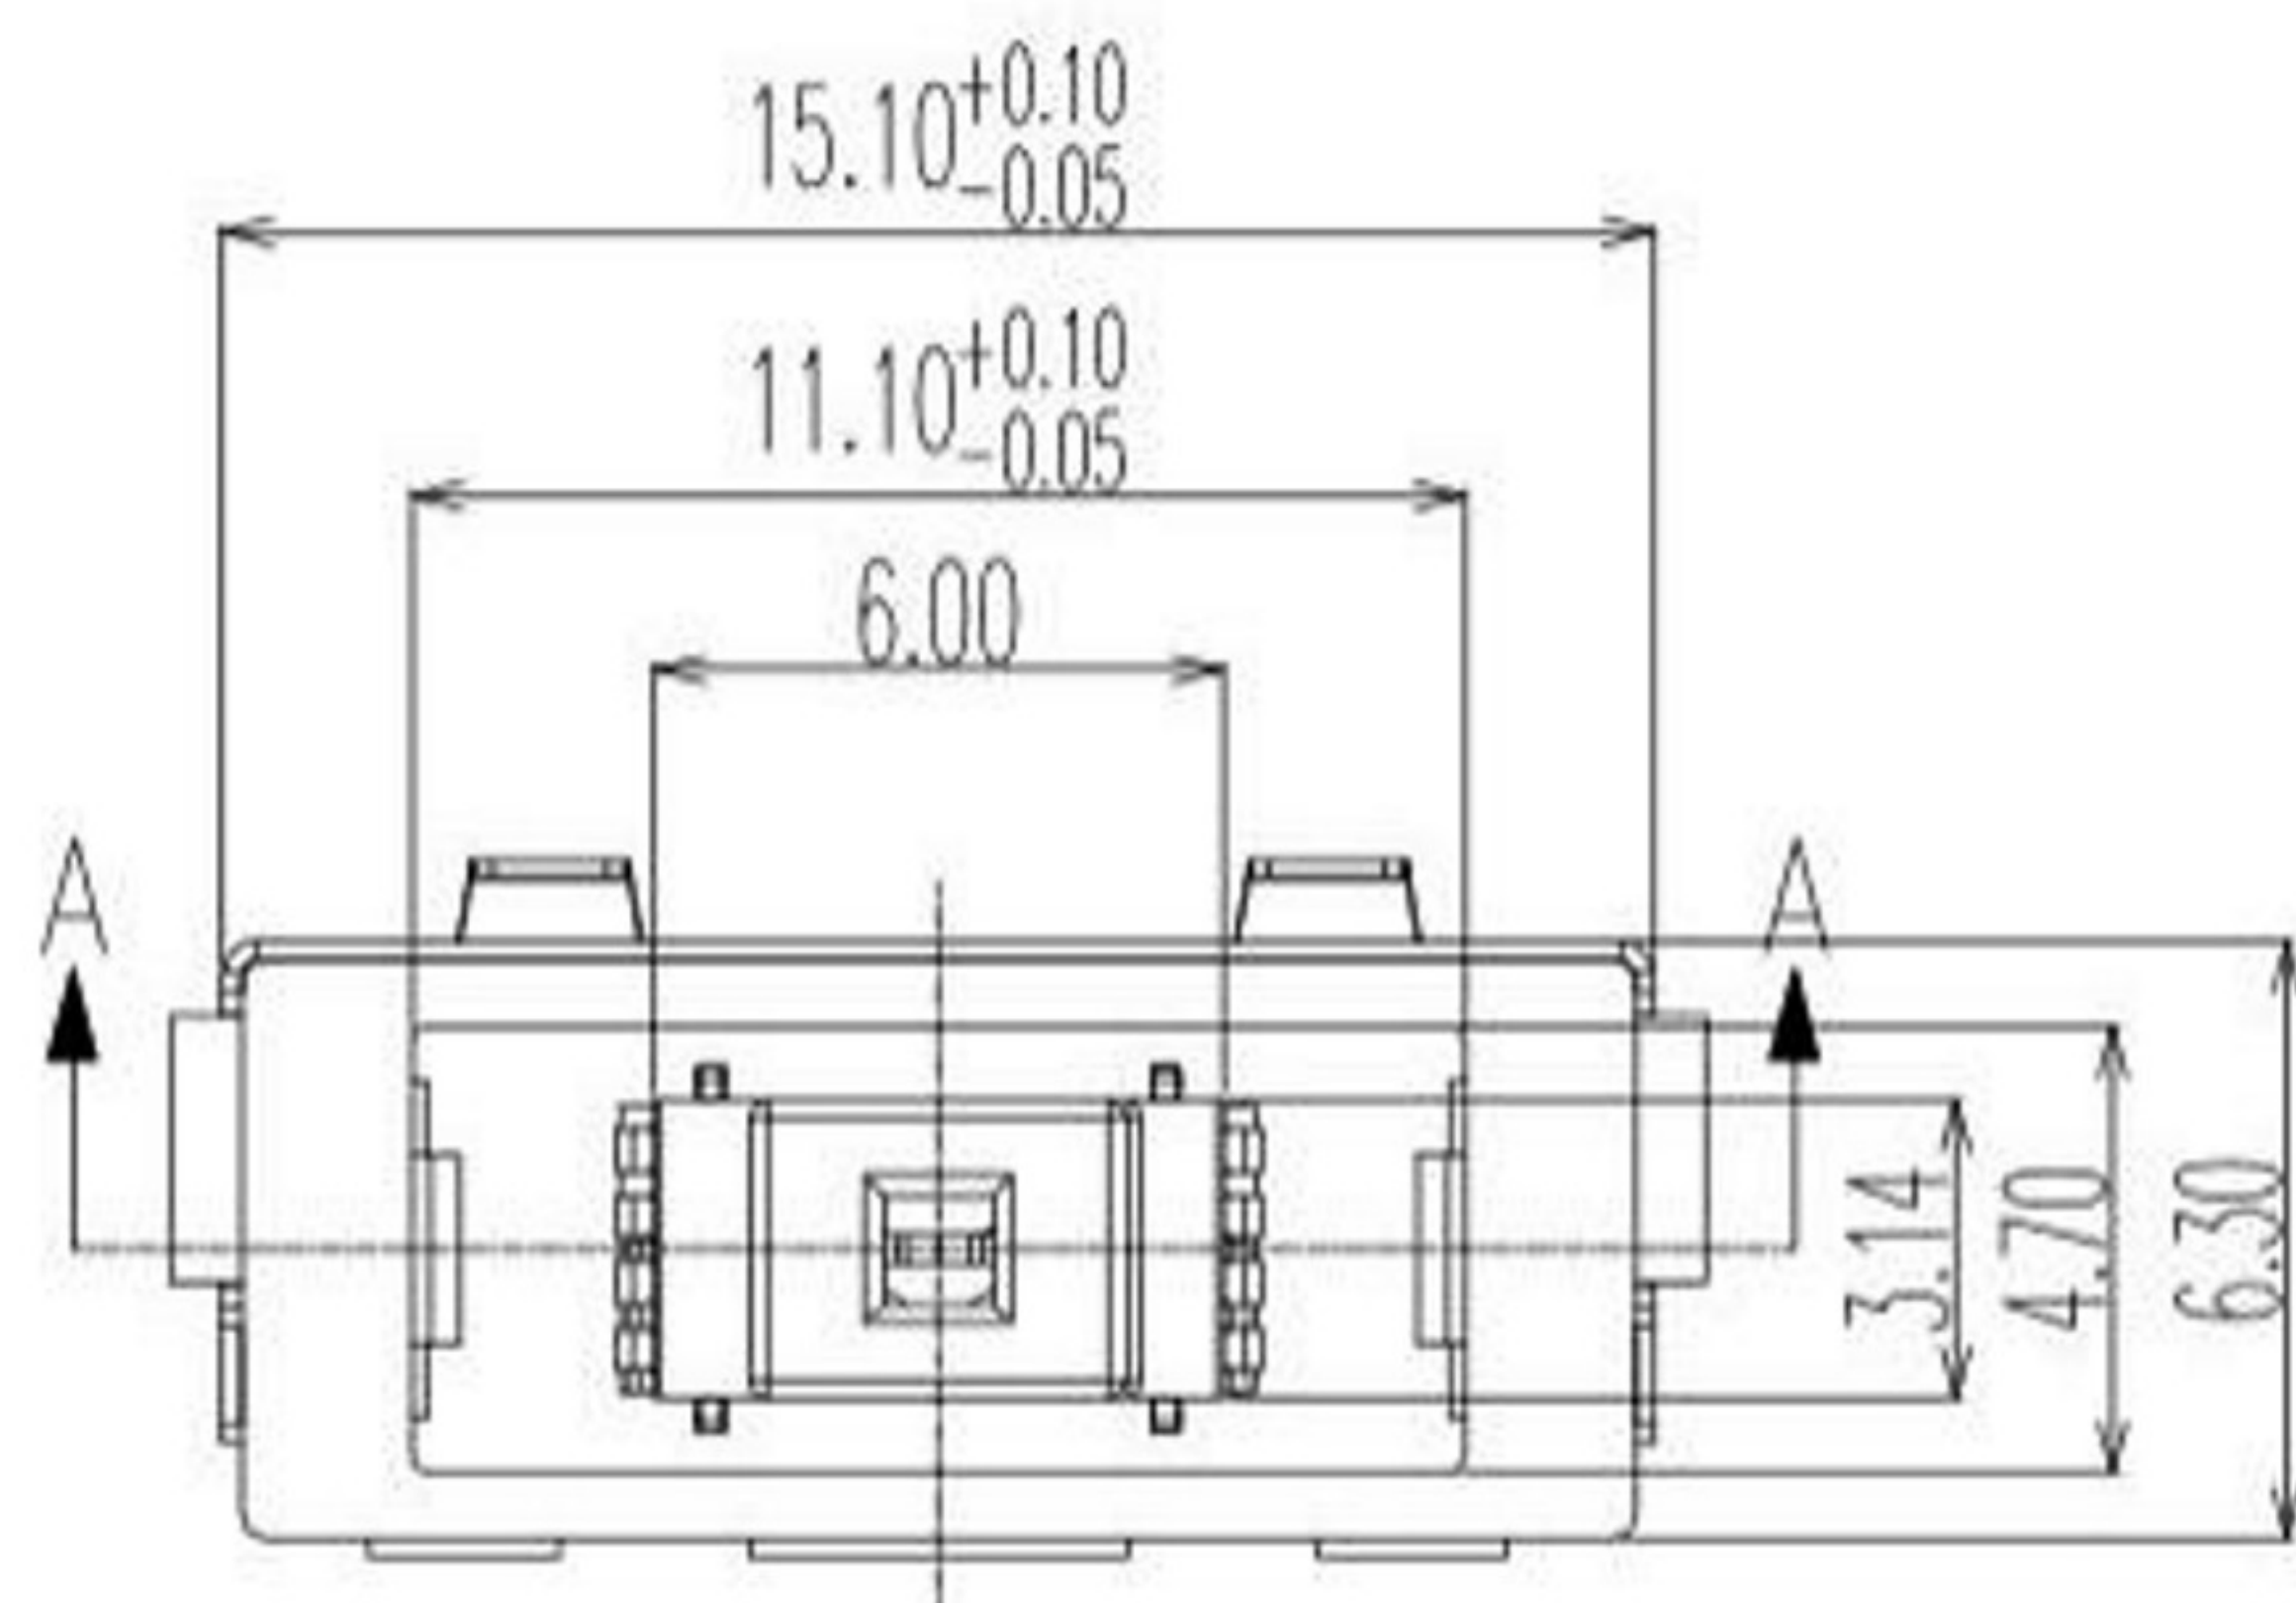

ITEM	NAME	Q'TY	DESCRIPTION
7	SHELL	1	STAINLESS STEEL; NICKEL (40u" MIN.) PLATING OVERALL .
6	CONTACT 5#	1	PHOSPHOR BRONZE; NICKEL(40u" MIN.) UNDER PLATING OVERALL,MATTE TIN(40u") PLATING ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
5	CONTACT 4#	1	PHOSPHOR BRONZE; NICKEL(40u" MIN.) UNDER PLATING OVERALL,MATTE TIN(40u") PLATING ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
4	CONTACT 3#	1	PHOSPHOR BRONZE; NICKEL(40u" MIN.) UNDER PLATING OVERALL,MATTE TIN(40u") PLATING ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
3	CONTACT 2#	1	PHOSPHOR BRONZE; NICKEL(40u" MIN.) UNDER PLATING OVERALL,MATTE TIN(40u") PLATING ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
2	CONTACT 1#	1	PHOSPHOR BRONZE; NICKEL(40u" MIN.) UNDER PLATING OVERALL,MATTE TIN(40u") PLATING ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
1	HOUSING	1	PA10T BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

Switch Connector

DWG NO. Q/XM-CP-RD-0126

DESIGN:

CHECK:

APPROVED

PART NAME:
DC POWER JACK UPRIGHT
TYPE CONNECTOR

PART NO.
XB-DC-1101L

REV. A

UNIT: mm

SHEET: 1/1