

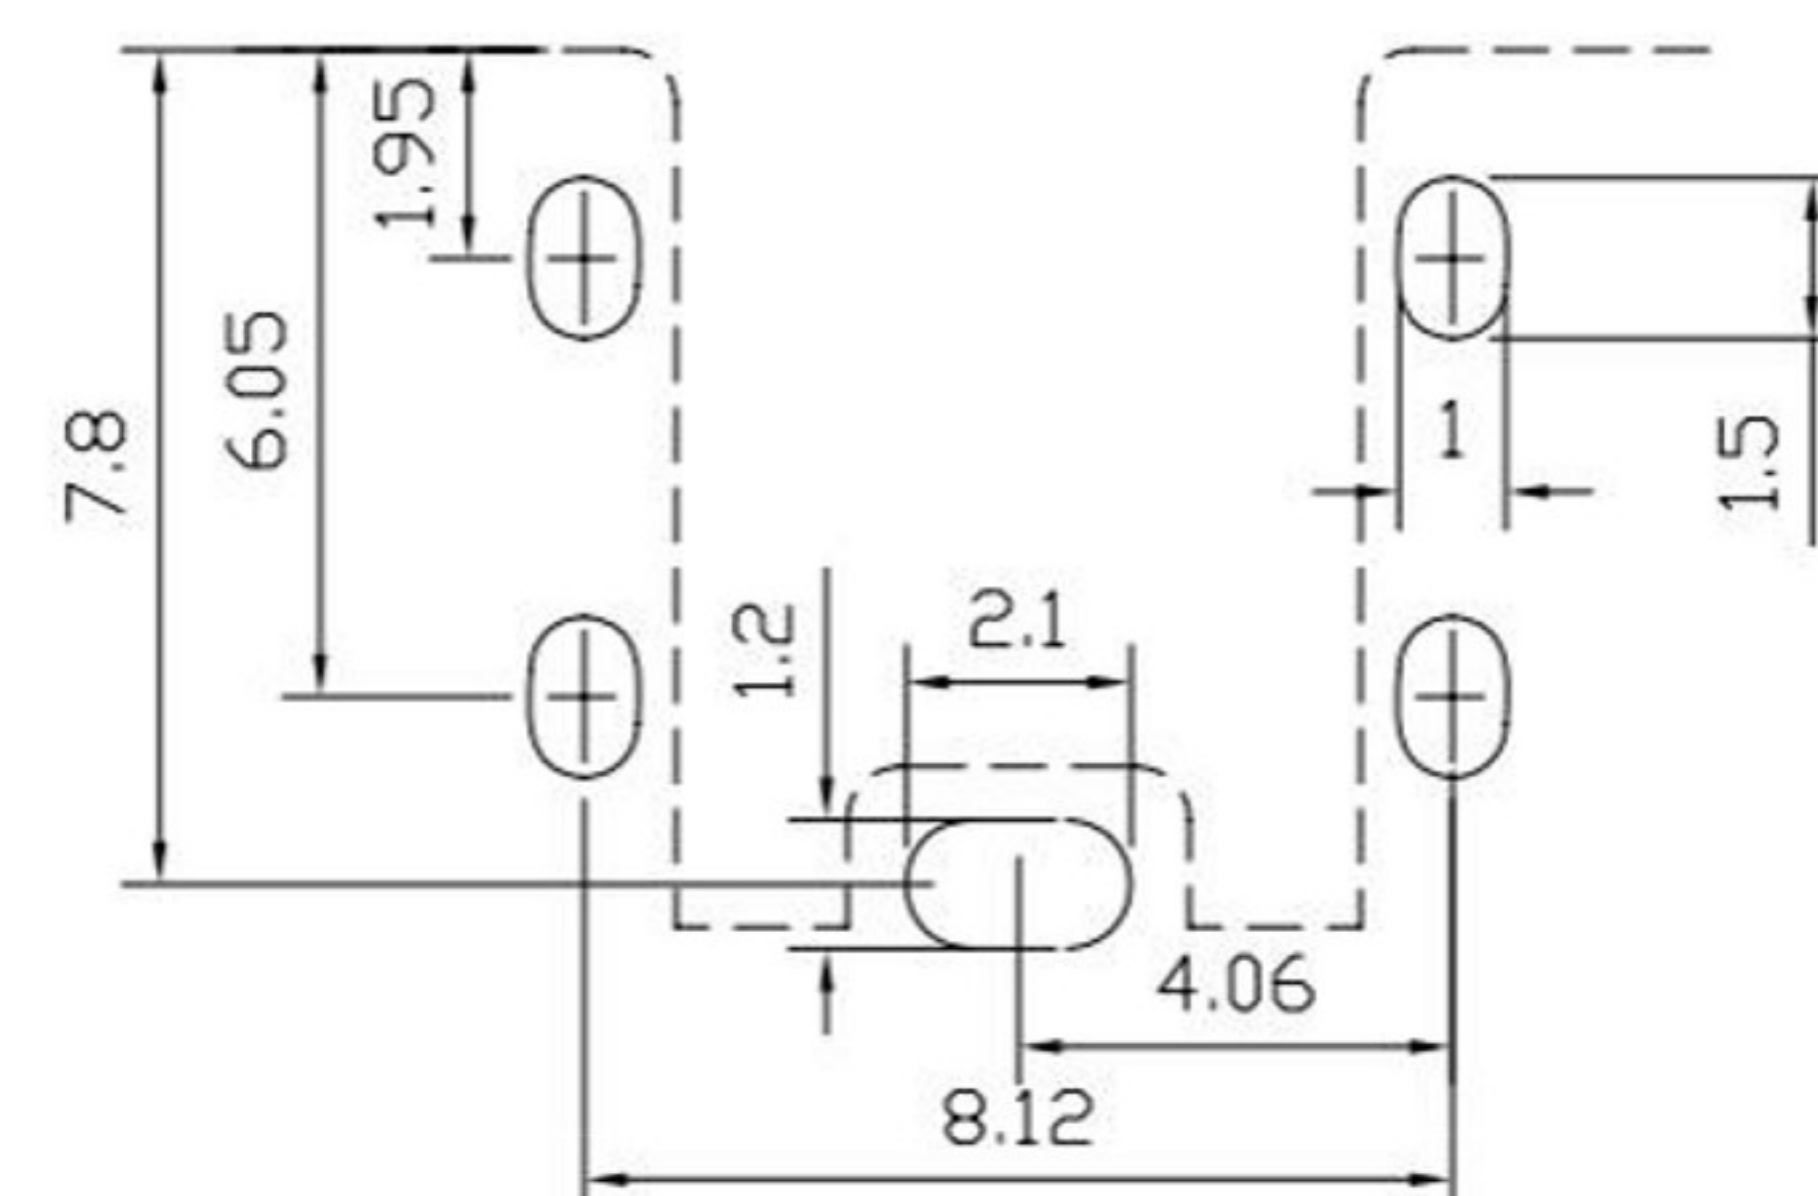
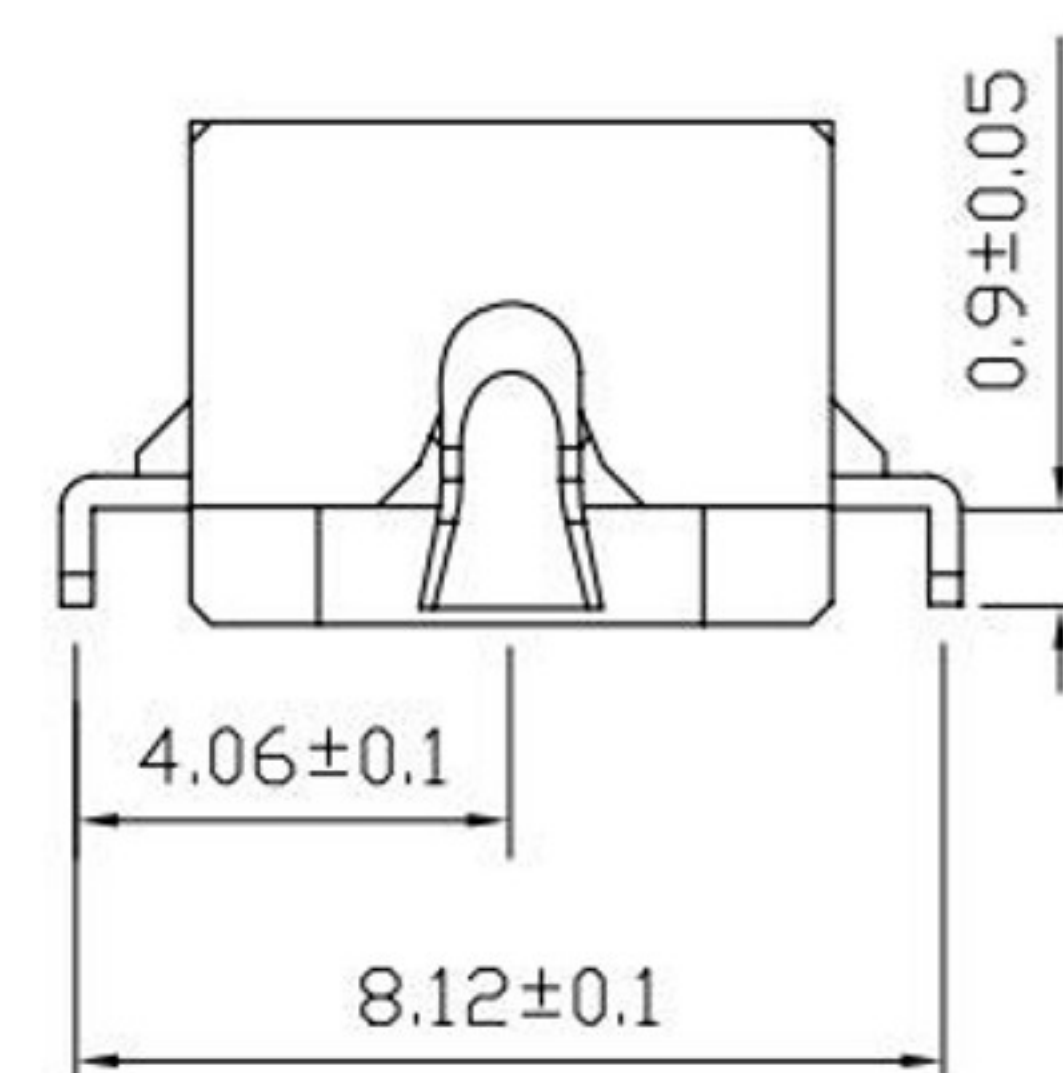
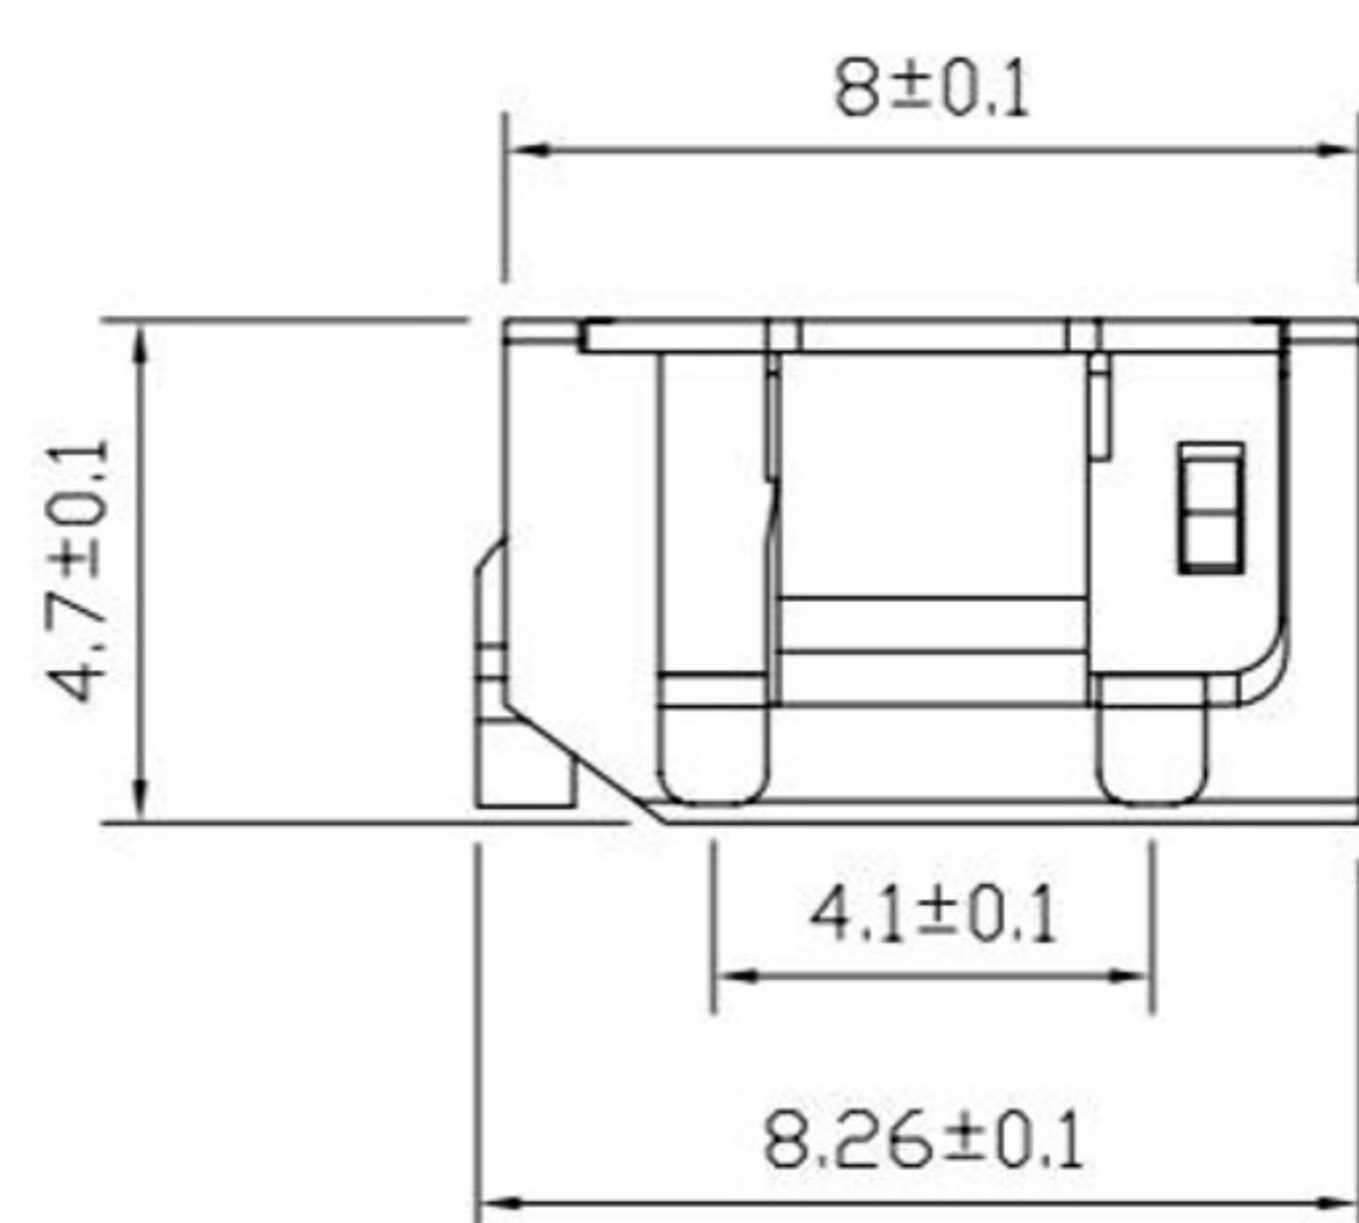
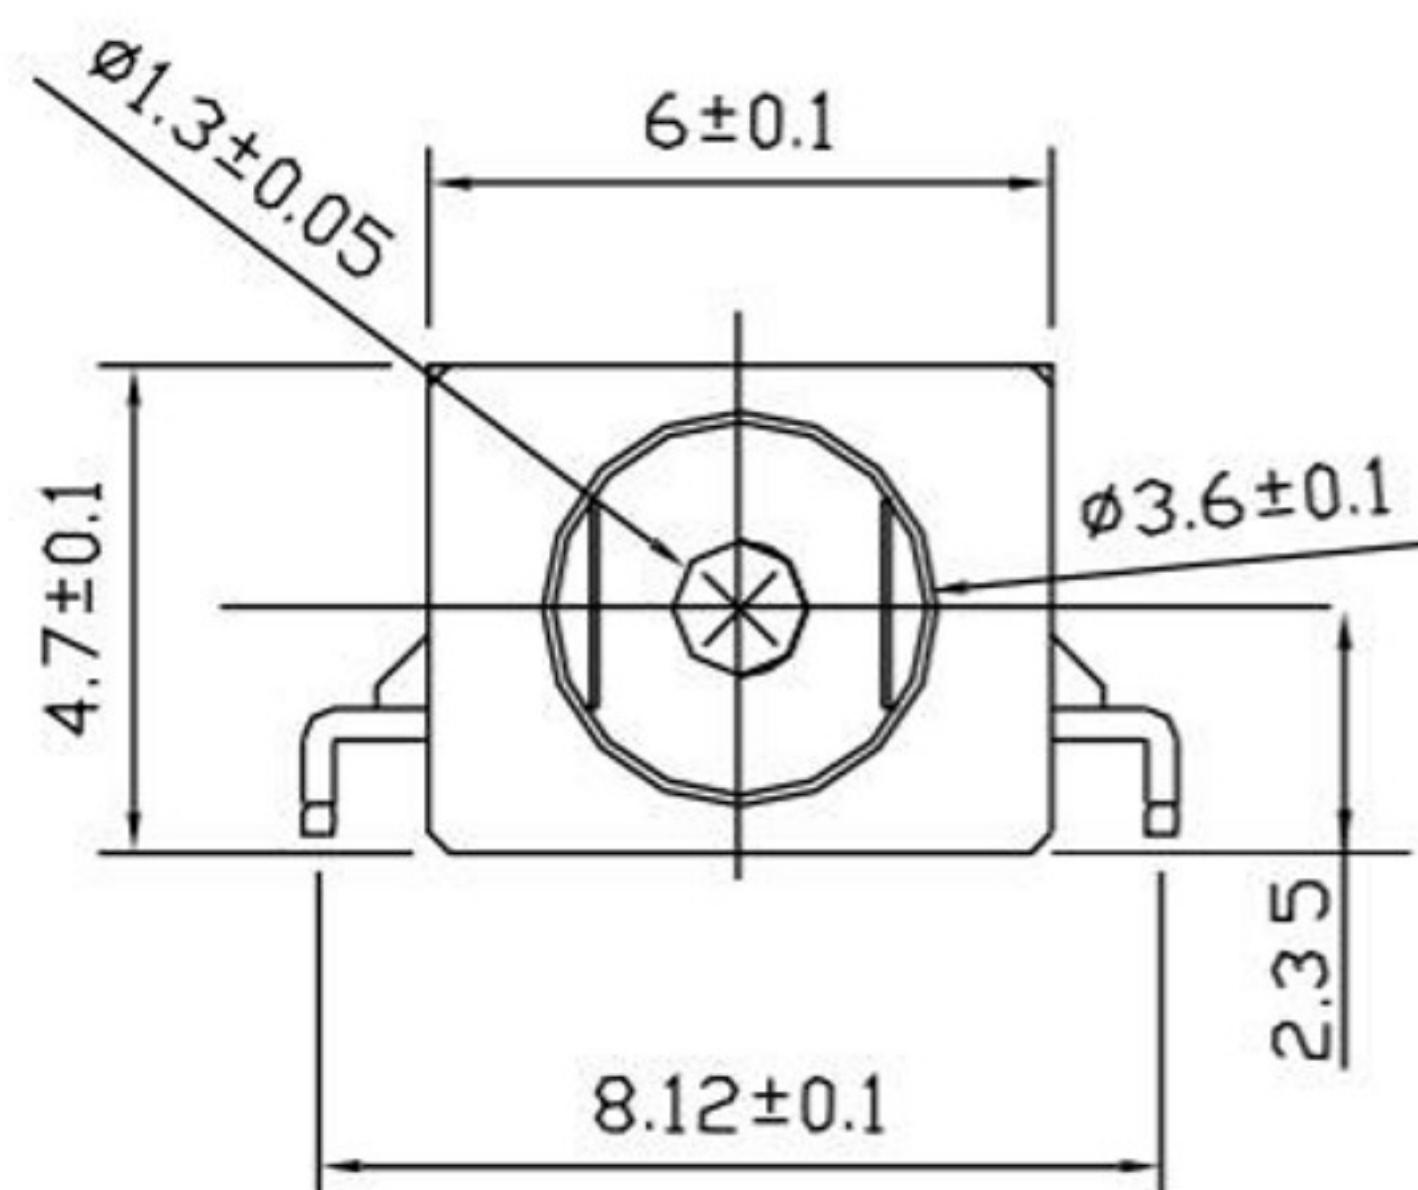


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A	XXXXXXX	INITIAL	Kai	2018.05.11

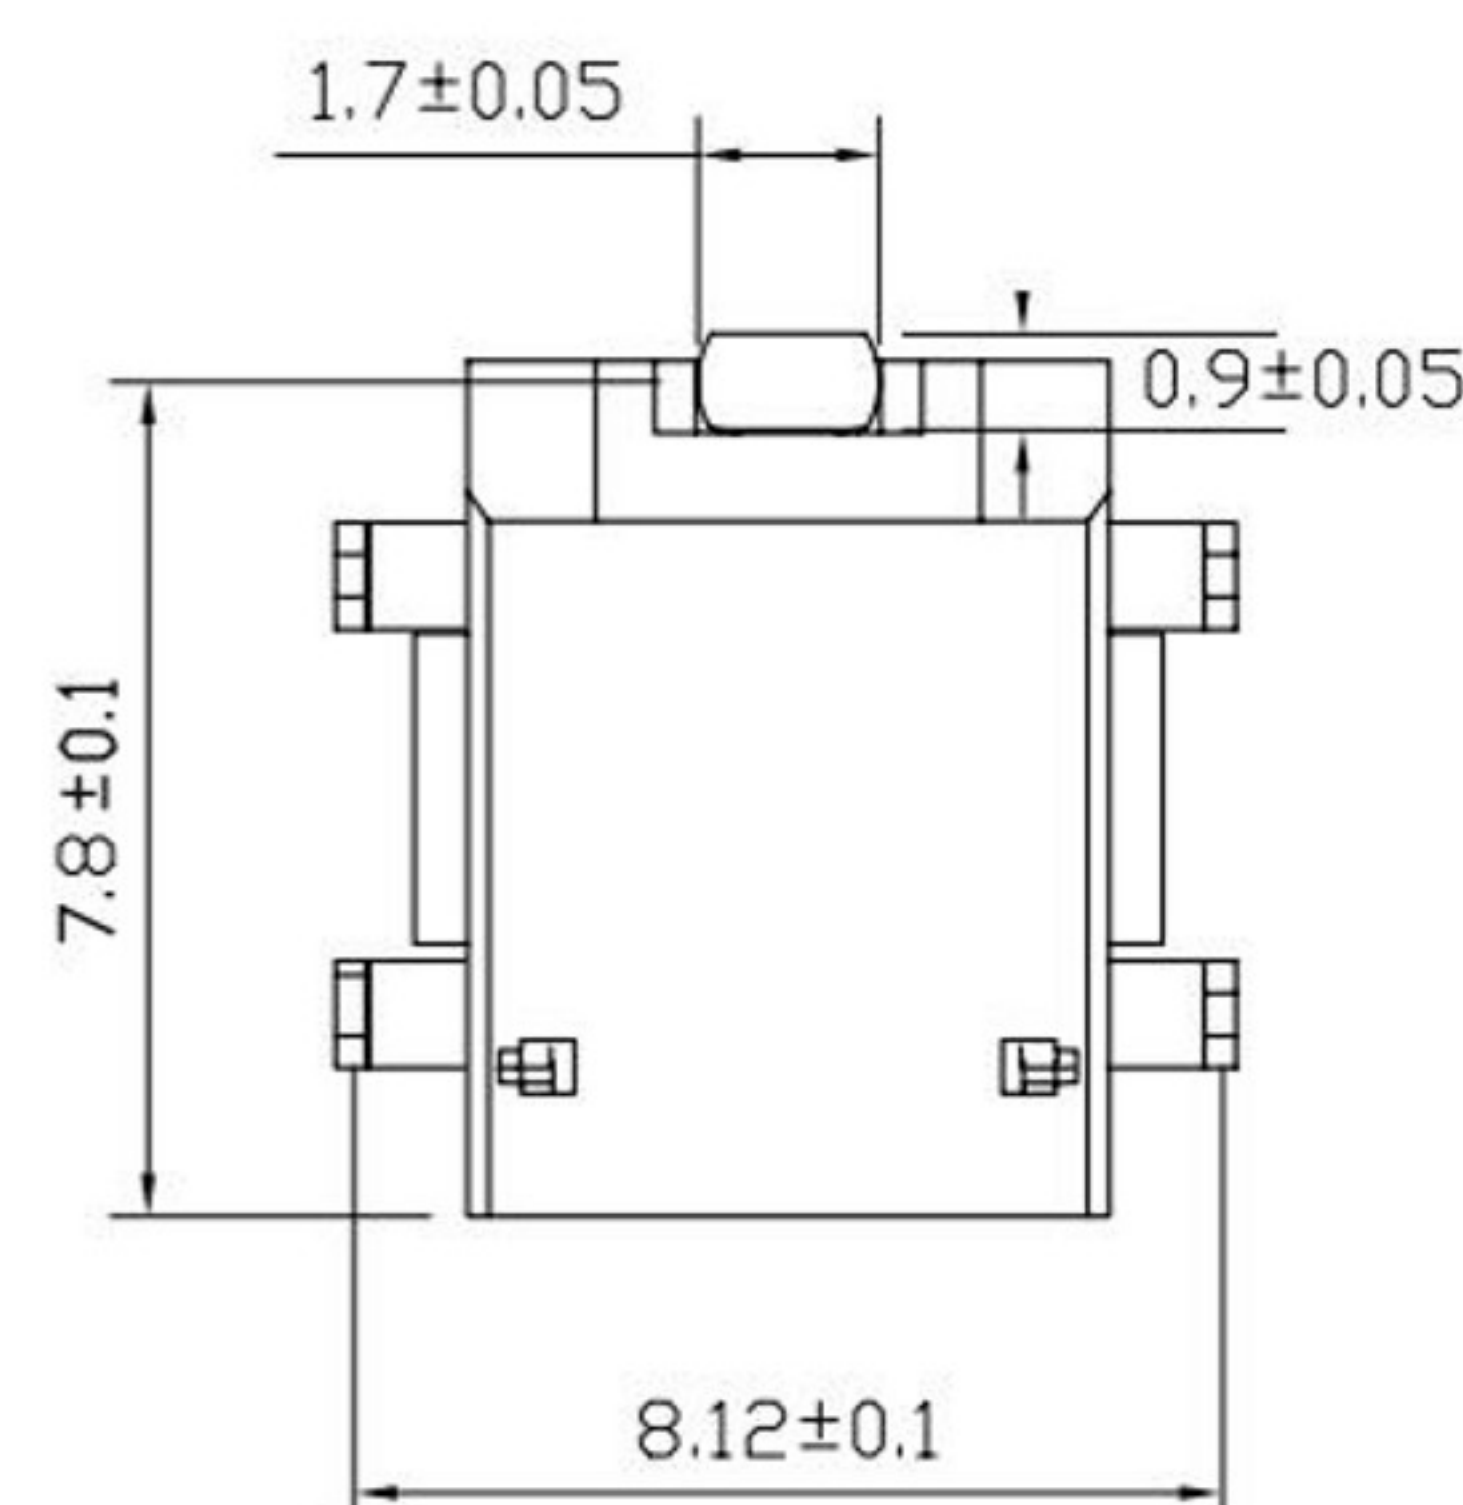

P. C. B

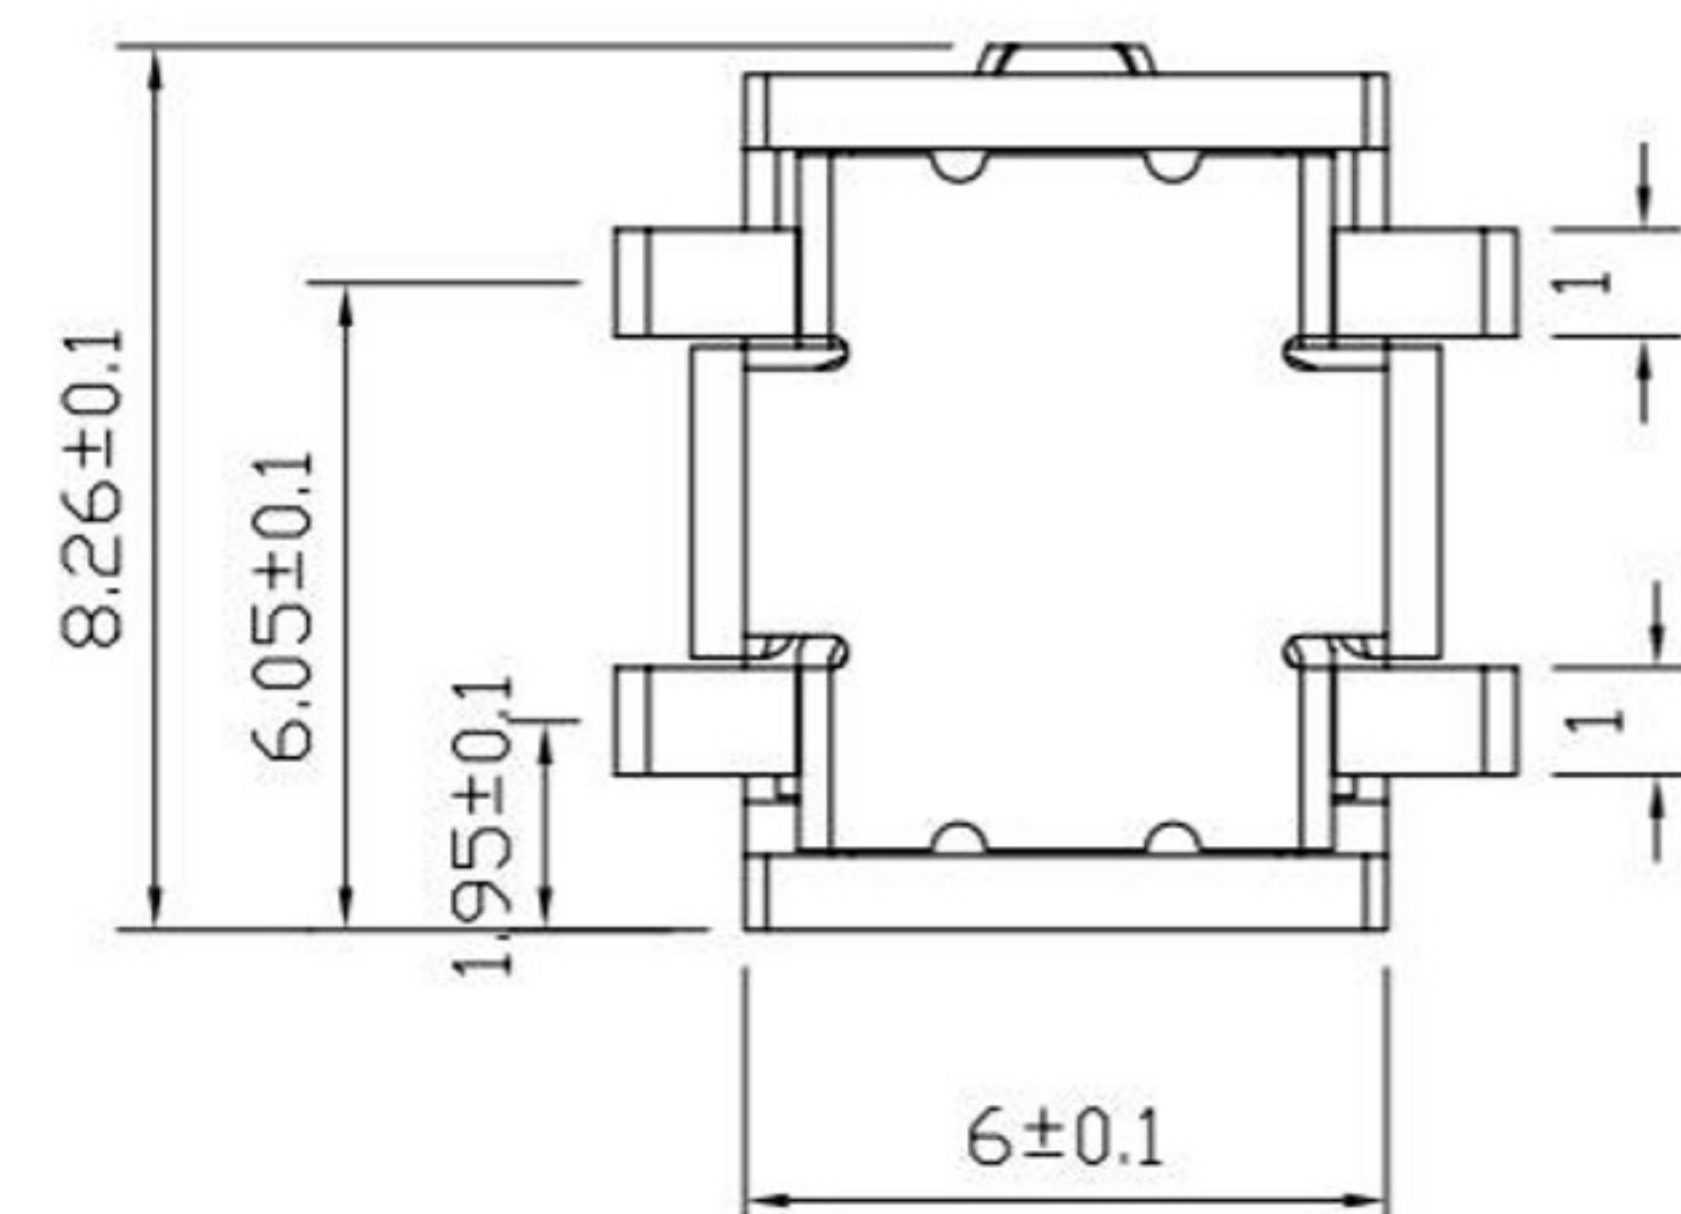

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: 24V 3A
- 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 0.3~3.0 KGF
- 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF

3. LIFE TEST: 5,000 CYCLES MIN.

4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

5. ▼ REPRESENT CRITICAL DIMENSIONS.

6. ▽ CPK CONTROLLED DIMENSIONS.

③	CENTER PIN	1	BRASS Ø1.10	Au
②	TERMINAL	1	PHOSPHOR BRONZE 0.2t	Au
①	HOUSING	1	PAA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DWG NO.	Q/XM-CP-RD-0097	PART NAME:
DIM	TOL	DIM	TOL	DC POWER JACK
X.	±0.50	X.	±2°	PART NO.
X.X	±0.30	X.X	±1°	XB-DC-3001X
X.XX	±0.20	X.XX	///	REV.
X.XXX	±0.10	X.XXX	///	A
		DESIGN:		UNIT: mm
		CHECK:		SHEET: 1/1
		APPROVED		

电路原理图

