


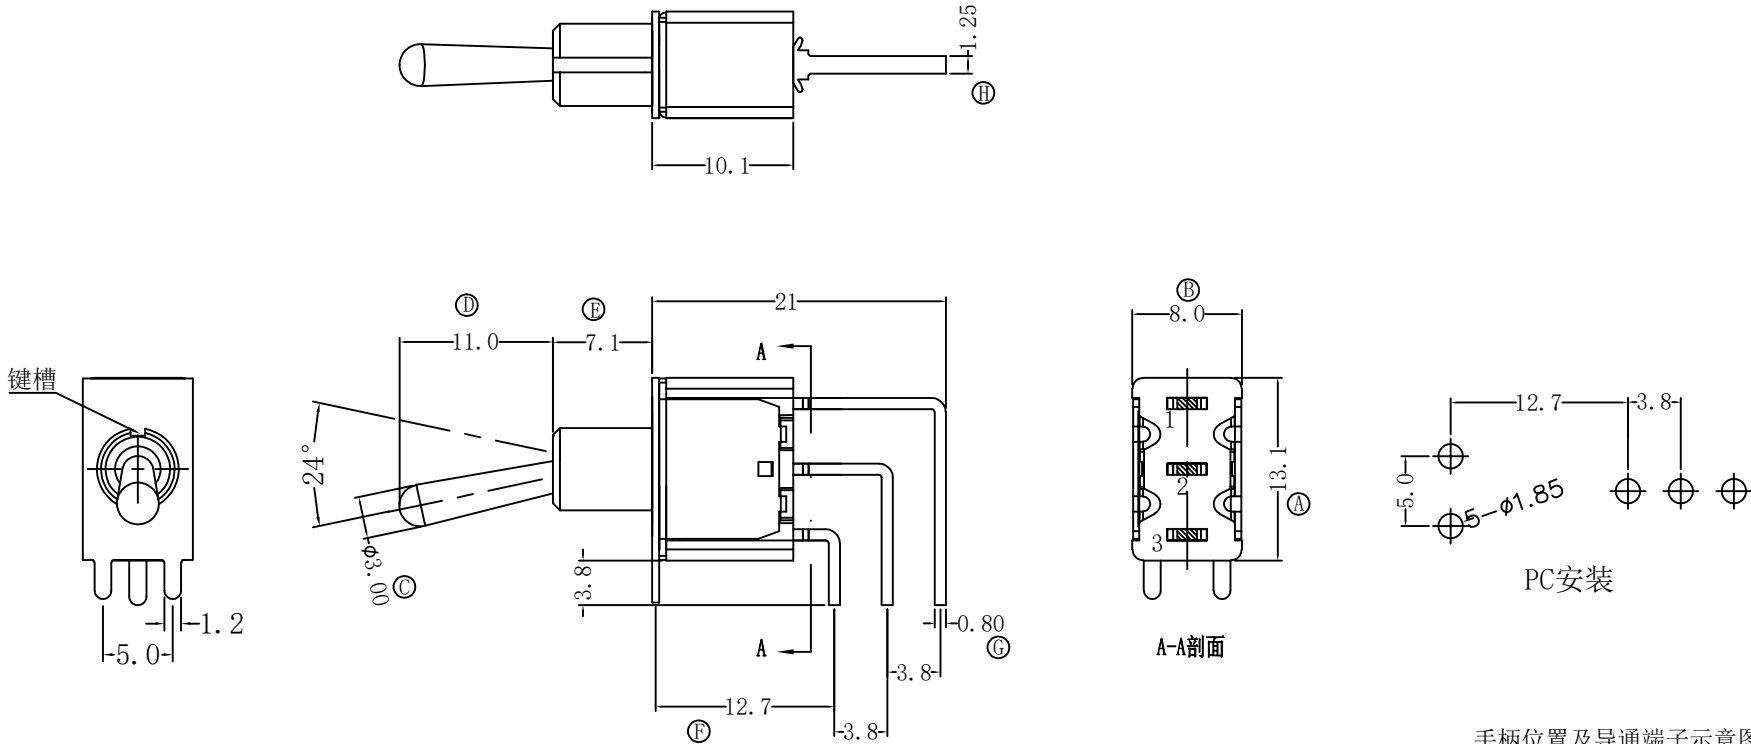

标注：Ⓐ - Ⓗ 为重点检测尺寸

Technical characteristics

SPECIFICATION:5 A max. @ 125 VAC.
2 A max. @ 250 VAC.
MECHANICAL LIFE:40,000 make-and-break cycles.
ELECTRICAL LIFE:10,000 make-and-break cycles.
CONTACT RESISTANCE:20mΩ max.initial @2-4VDC
100mA for both silver.
INSULATION RESISTANCE: 1000 MΩ min.
DIELECTRIC STRENGTH: 1500 VAC min.
OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)
HOUSING: Stainless Steel.
ACTUATOR: Alloy,chrome plated.
BUSHING: Alloy ,nickel plated.
CONTACT/TERMINALS: Copper alloy silver plated.
RoHS

手柄位置及导通端子示意图

Model NO.	POS. 1	POS. 2	POS. 3
102	ON	NONE	ON
SCHEMATIC		N/A	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

				公差 TOLERANCES		.X± 0.4	.XX± 0.25	角度	± 5°	UNIT 单位	mm	SCALE 1:1	
				版本	A0	比例尺	NONE	日期	2022.7.25	TITLE 图名	TOGGLE SWITCH		
				VERSION		SCALE		DATE		DWG NO.料号			
				核准		核对		绘图	WSL	PART NO.型号	XB-MT-1-102-A004-N004-RS		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY					