


ROHS

版本 REV	修正标记 REV LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

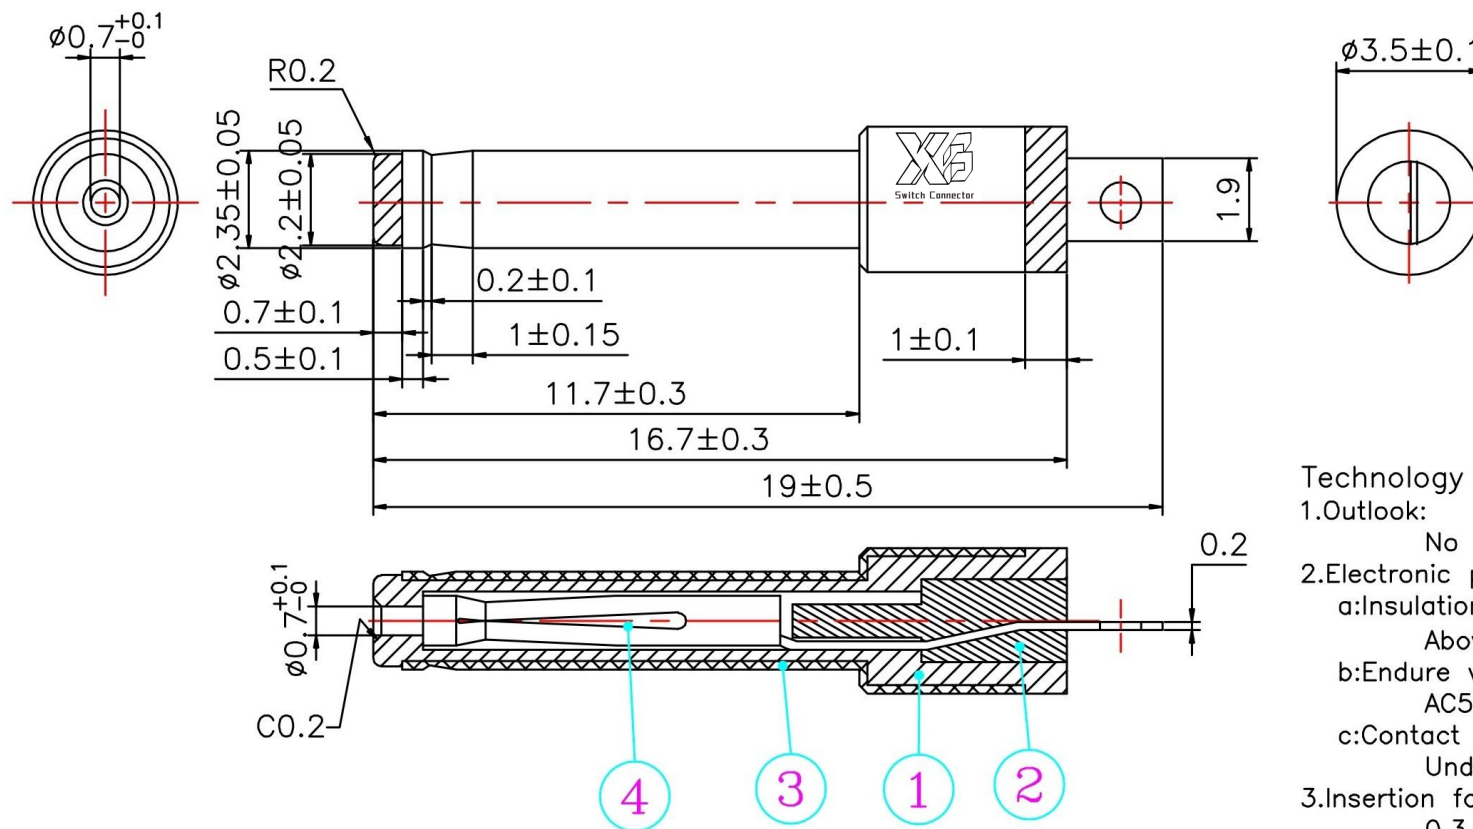

Technology Request:

1.Outlook:

No burr, no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100M Ω ;

b:Endure voltage:

AC500V at 1 minute;

c:Contact resistance:

Under 30m Ω ;

3.Insertion force & withdrawal force:

0.3-3kgf.

4.Plug life: 5000 times.

5.Salt spray test:48H.

6.Meet RoHS.

7.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	6	5	4	3	2	1	NO	核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	规格 DESCRIPTION:	品名 P/N:	图号 DRAWN NO:
比例 Scale	5:1	xx.: ± 0.3	4	3	2	1	NO	2307-19连续端子	BRONZE(C5191)	Ni 40~120 μ	June	杨义邦	苏伟伦	DC PLUG $\phi 2.35 \times \phi 0.7 \times 19$	XB-23507TV190YE	
视图 Third angle projection		x.x: ± 0.1	3	2	1	NO	3.5*15*2.37半内管	BRASS(C3604)	Ni 40~120 μ							
		.xx: ± 0.05	2	1	NO		PLASTIC	POM	BLACK							
			1	NO			PLASTIC	PBT	YELLOW							
			NO				PART	MATERIAL	PLATING							