


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180901

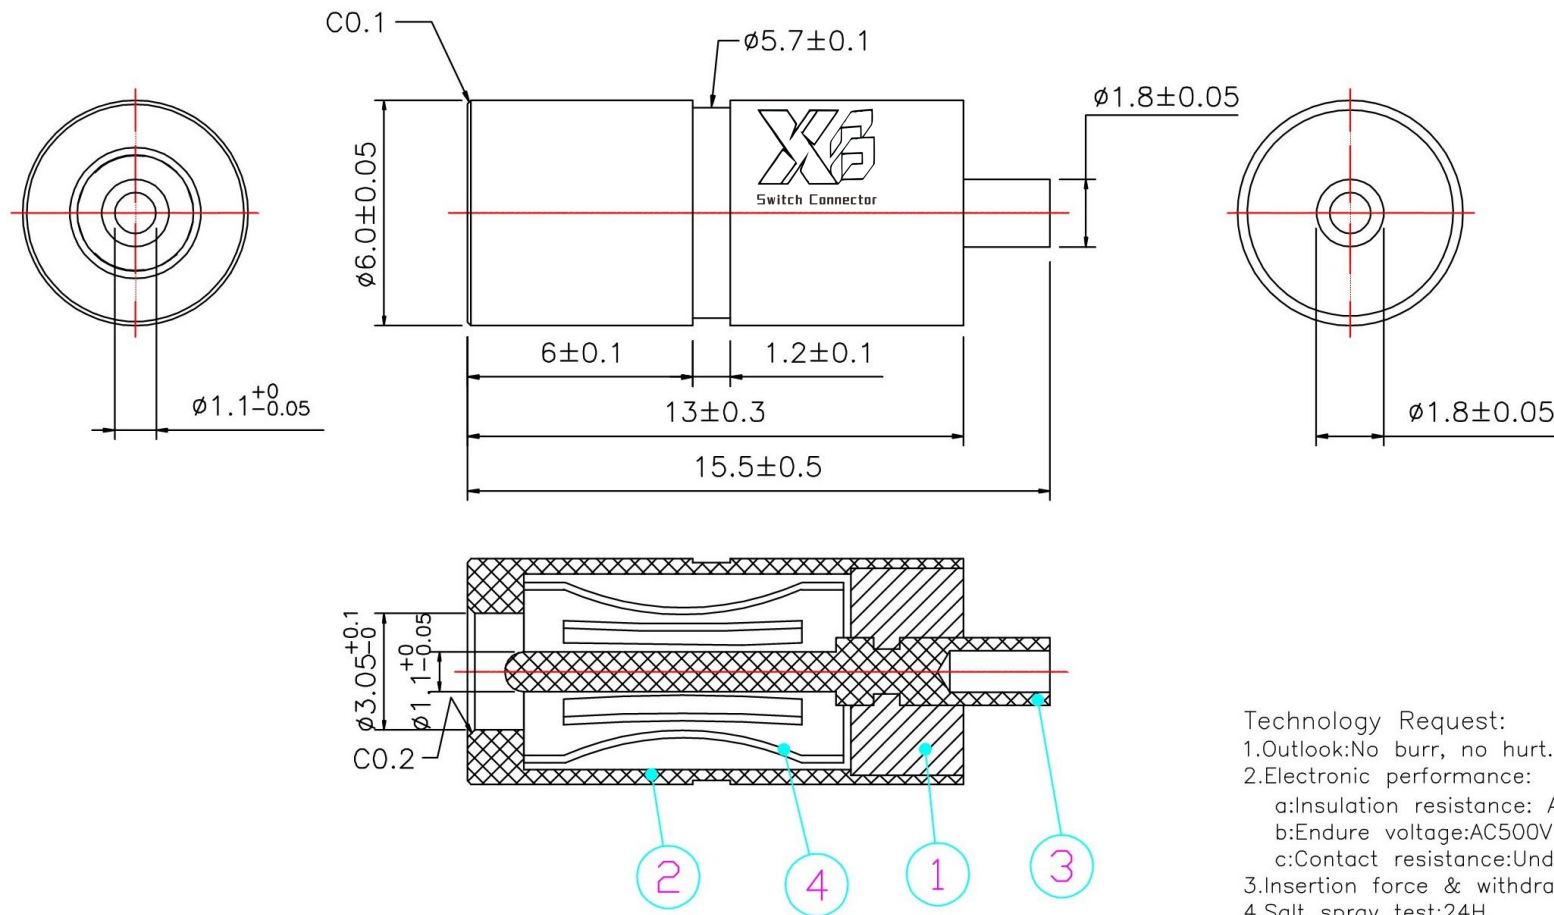

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100M Ω ;
 - b:Endure voltage:AC500V at 1 minute;
 - c:Contact resistance:Under 30m Ω ;
- 3.Insertion force & withdrawal force:0.3–3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
			6									
比例 Scale	5:1	xx.:±0.3	5				June	杨义邦	李莹峰		规格 DESCRIPTION:	DC JACK Ø3.0*Ø1.1*15.5
视图 Third angle projection		x.x.:±0.1	4	4.85*8.5加力弹圈	C5191	Ni 2um-5um					品名 P/N:	XB-3011J60
			3	1.06*1.8*14.5针	C3604	Ni 2um-5um					图号 DRAWN NO:	
		.xx.:±0.05	2	6*13*3.1管	C3604	Ni 2um-5um						
			1	PLASTIC	PBT	BLACK						
			NO.	PART	MATERIAL	PLATING						