


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

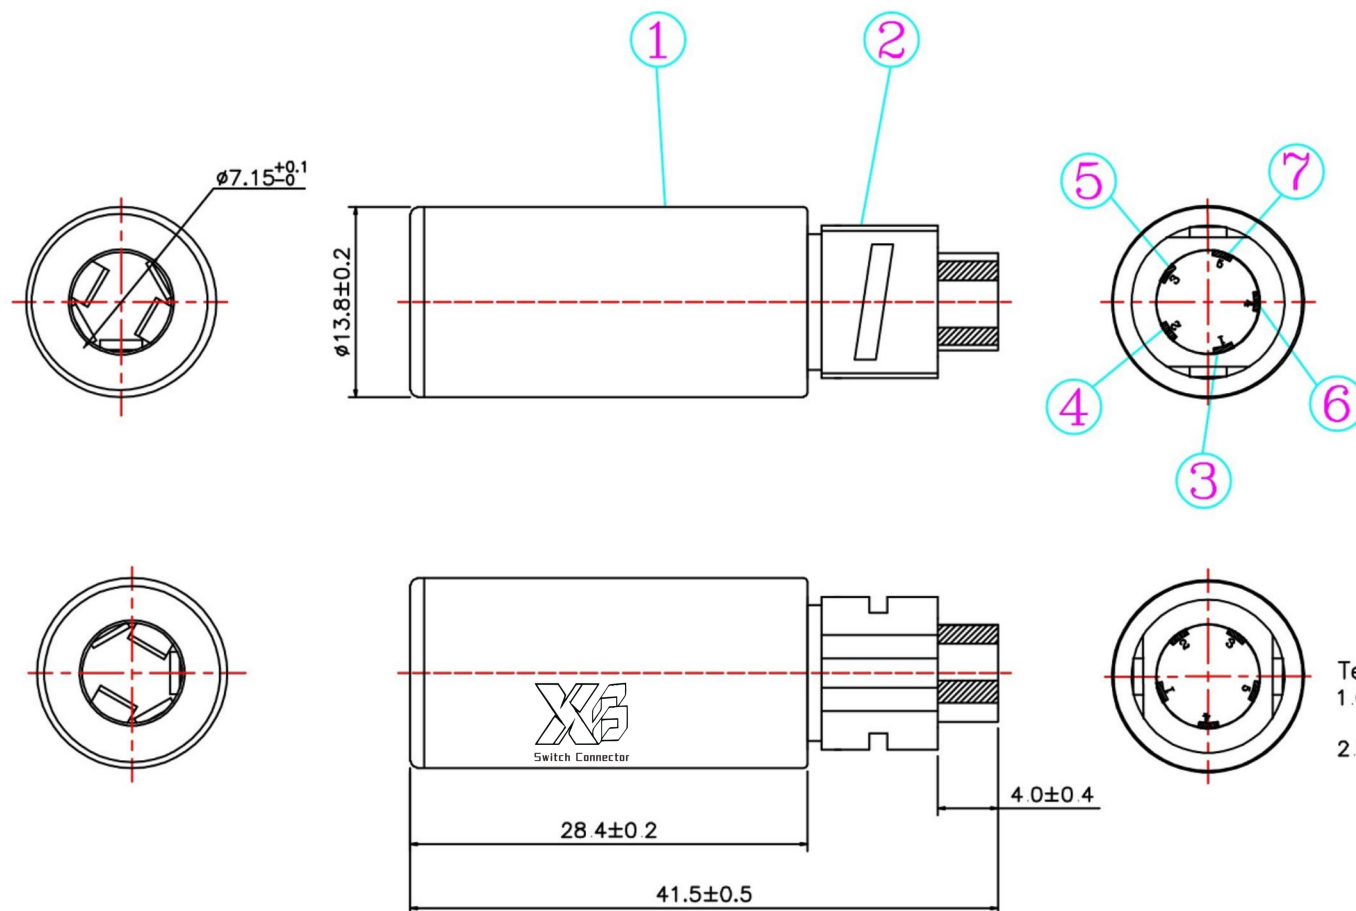

Technology Request:
 1 Outlook:
 No burr, no hurt.
 2 Electronic performance:
 a: Insulation resistance:
 Above DC500V/100M Ω ;
 b: Endure voltage:
 AC500V at 1 minute;
 c: Contact resistance:
 Under 30m Ω ;
 3 Insertion force & withdrawal force:
 0.3-3kgf.
 4 Salt spray test 24H.
 5 Meet RoHS.
 6 Remark * is important specification.

序号	产品编号	产品名称	数量	材料	规格	电镀
4		盖脚	1	磷铜	0.25T	镀银
3		弹片脚	1	镀青铜	0.2T	镀银
2		中脚	3	磷铜	0.2T	镀银
1		底座	1	PPA		黑色

主要技术性能	
额定电负荷	DC 30V\0.5A
接触电阻	$\leq 0.03\Omega$
绝缘电阻	$\geq 100M\Omega$
耐压	AC500V (50Hz)/min
插拔力	3-20N
使用温度范围	-30-70 $^{\circ}\text{C}$
使用寿命	5000次

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.35	X.	$\pm 2^{\circ}$
X.X	± 0.30	X.X	$\pm 1^{\circ}$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	Q/XM-CP-RD-XXXX	PART NAME:	PHONE JACK
DESIGN:	Kai	PART NO.	XB-J714138
CHECK:	Lucky	REV.	A
APPROVED	Lucky	UNIT:	mm
		SHEET:	1/1