


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

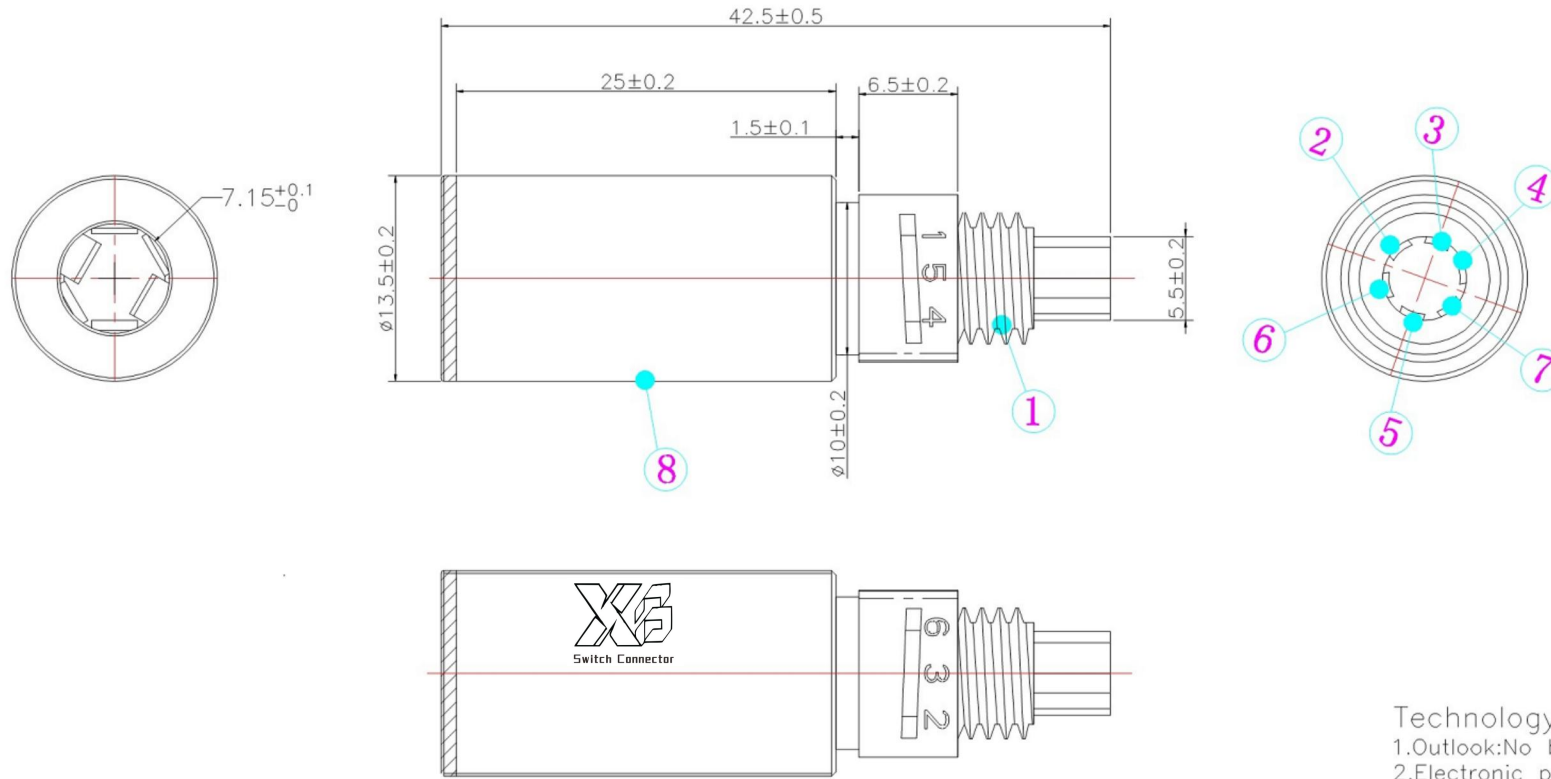

Technology Request:
 1.Outlook:No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance:
 Above DC500V/100MΩ;
 b:Endure voltage:AC500V at 1 minute;
 c:Contact resistance:Under 30mΩ;
 3.Insertion force & withdrawal
 force:0.3–3kgf.
 4.Salt spray test:24H.
 5.Meet RoHS.
 6.Remark * is important specification.

							主要技术性能		UNLESS OTHERWISE SPECIFIED TOLERANCES				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
							额定电负荷	DC 30V\0.5A								
4		盖 脚	1	磷 铜	0.25T	镀 银	接触电阻	≤0.03Ω	DECIMALS:		ANGLES:		DWG NO.	Q/XM-CP-RD-XXXX	PART NAME: PHONE JACK	
3		弹片脚	1	镀青铜	0.2T	镀 银	绝缘电阻	≥100MΩ					DIM	TOL		
2		中 脚	3	磷 铜	0.2T	镀 银	耐 压	AC500V (50Hz)/min	X.	±0.35	X.	±2°	CHECK:	Lucky 2018.06.14	REV. UNIT: SHEET: A mm 1/1	
1		基 座	1	P P A		黑 色	插 拔 力	3-20N	X.X	±0.30	X.X	±1°	APPROVED	Lucky 2018.06.14		
序号	产品编号	产品名称	数量	材 料	规 格	电 镀	使用温度范围	-30-70℃	X.XX	±0.20	X.XX	—				
	0	1	2		3		4	5					6	7	8	9
							使用寿命	5000次	X.XXX	±0.10	X.XXX	—				