


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20181115

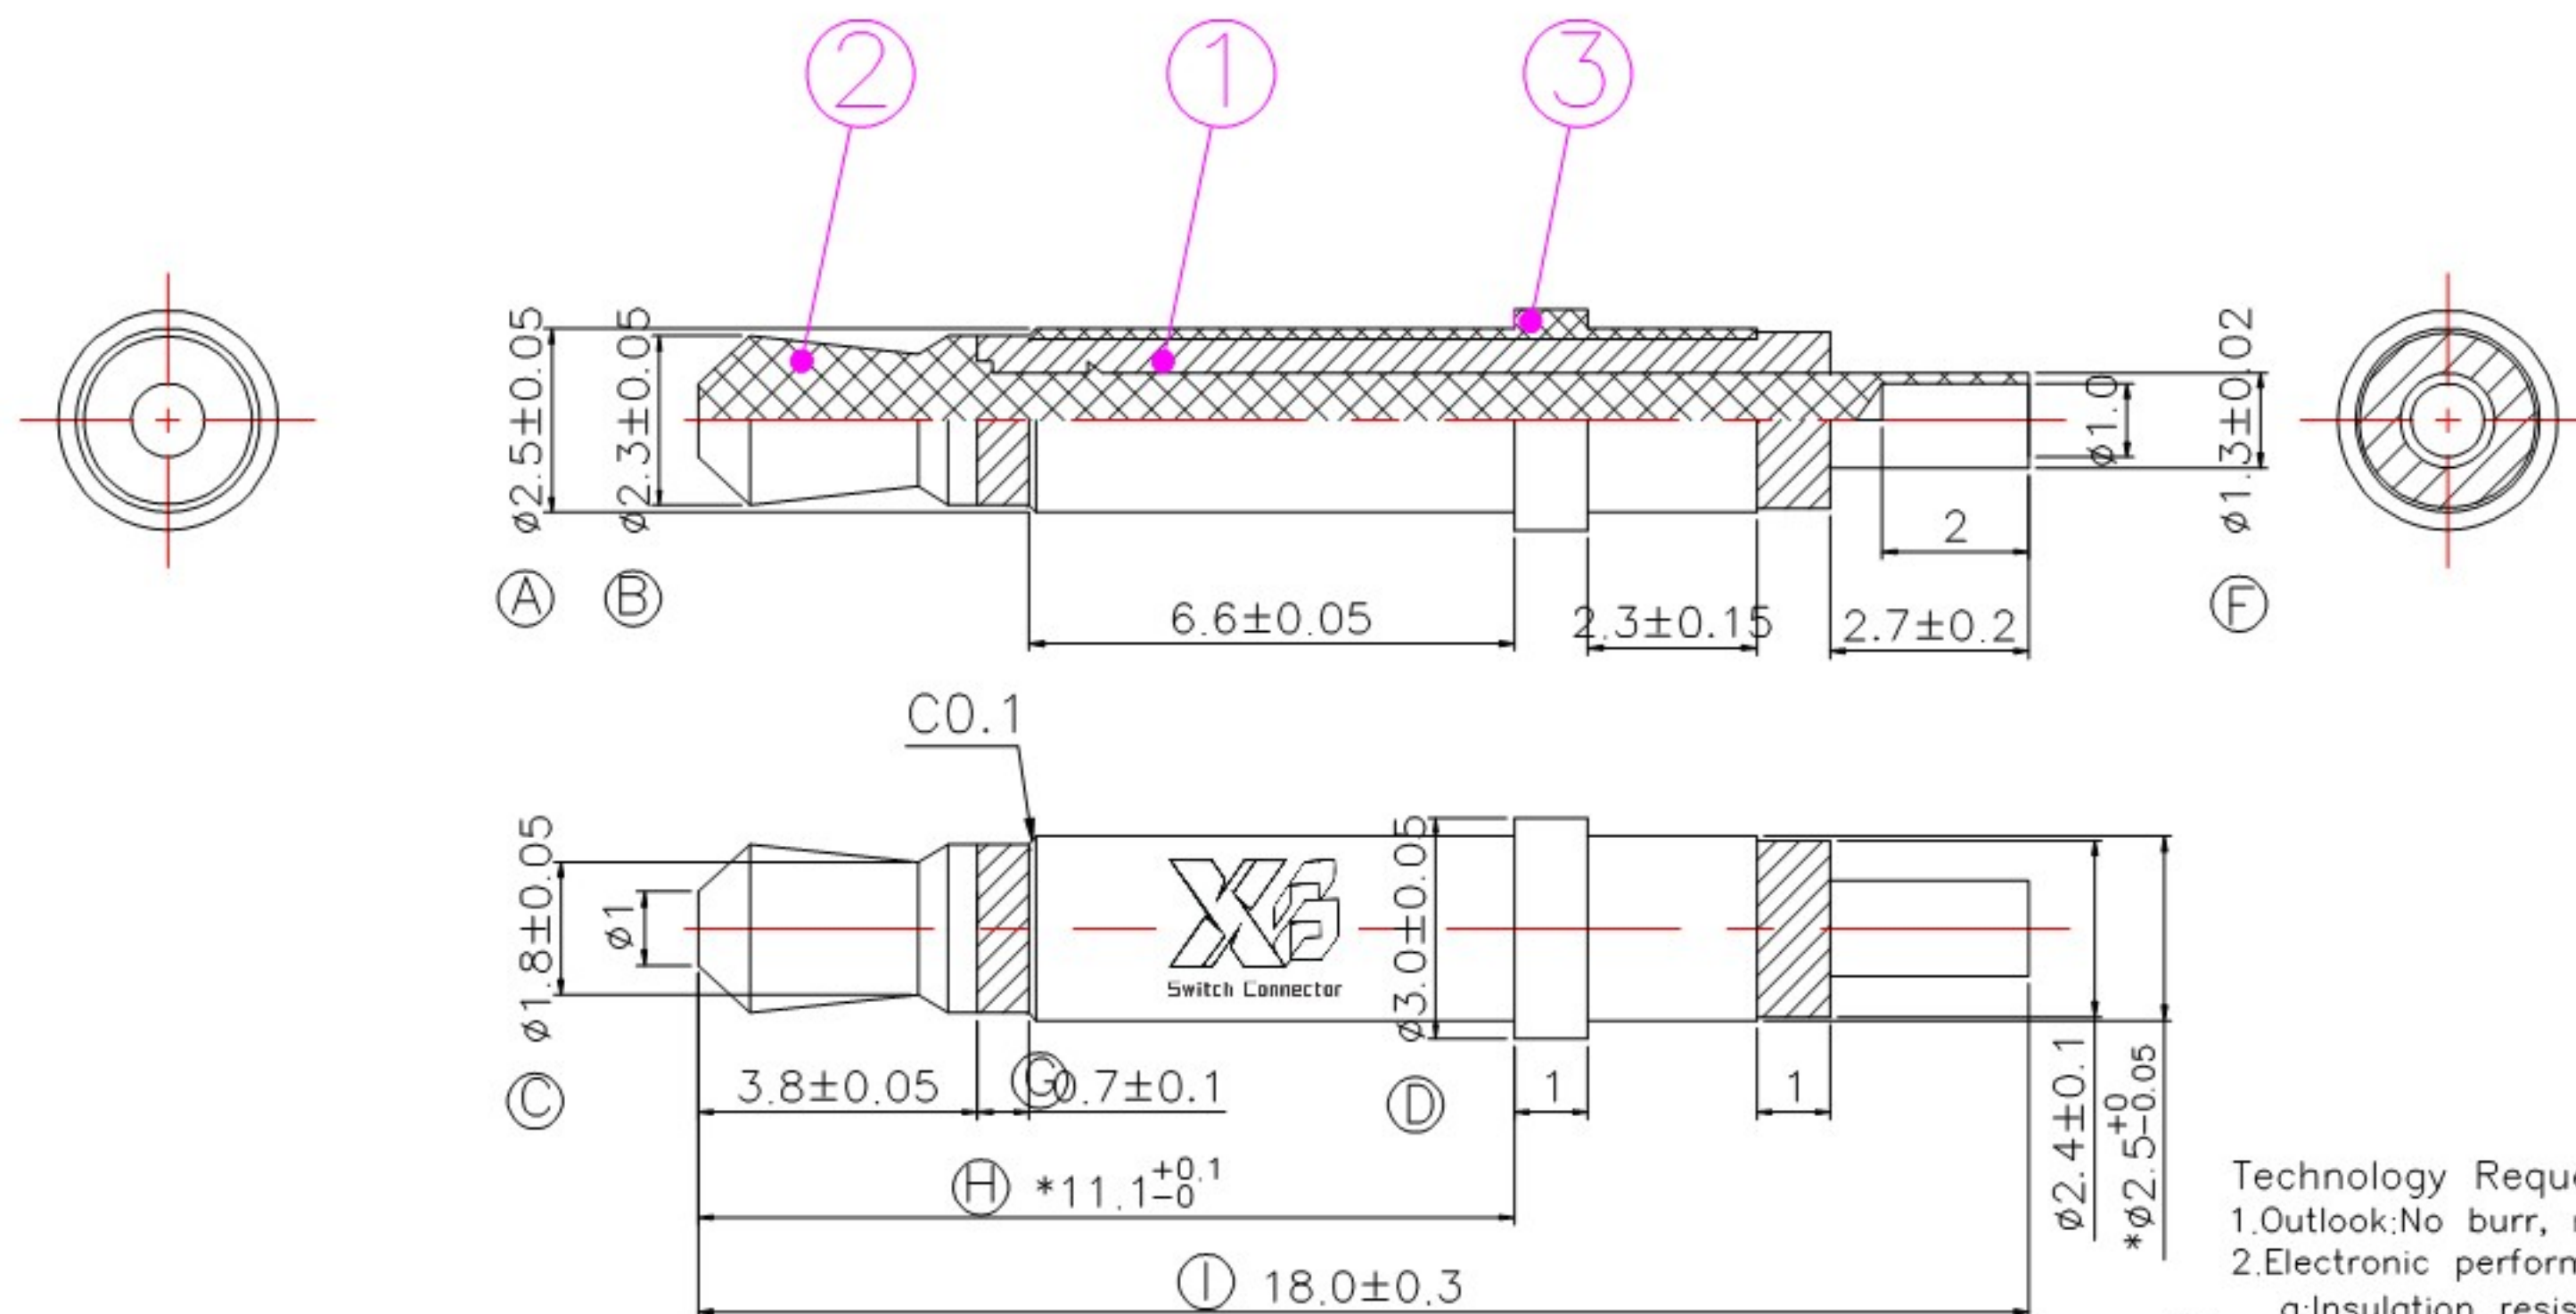

Technology Request:

1.Outlook:No burr, no hurt.

2.Electronic performance:

a:Insulation resistance: Above DC500V/100MΩ;

b:Endure voltage:AC500V at 1 minute;

c>Contact resistance:Under 30mΩ;

3.Insertion force & withdrawal force:0.3-3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			
比例 Scale	5:1	xx.:±0.3	6			
视图 Third angle projection		x.x:±0.1	5			
		.xx:±0.05	4			
			3	2.5*9.9*3.0外管	C3604	Ni 2um-3um
			2	2.28*18*1.3R头	C3604	Ni 2um-3um
			1	PLASTIC	POM	BLACK
			NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	2.5AUDIO PLUG 2.5*3.0*18
品名 P/N:	P25230180
图号 DRAWN NO:	CP-04-0002