


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20190224

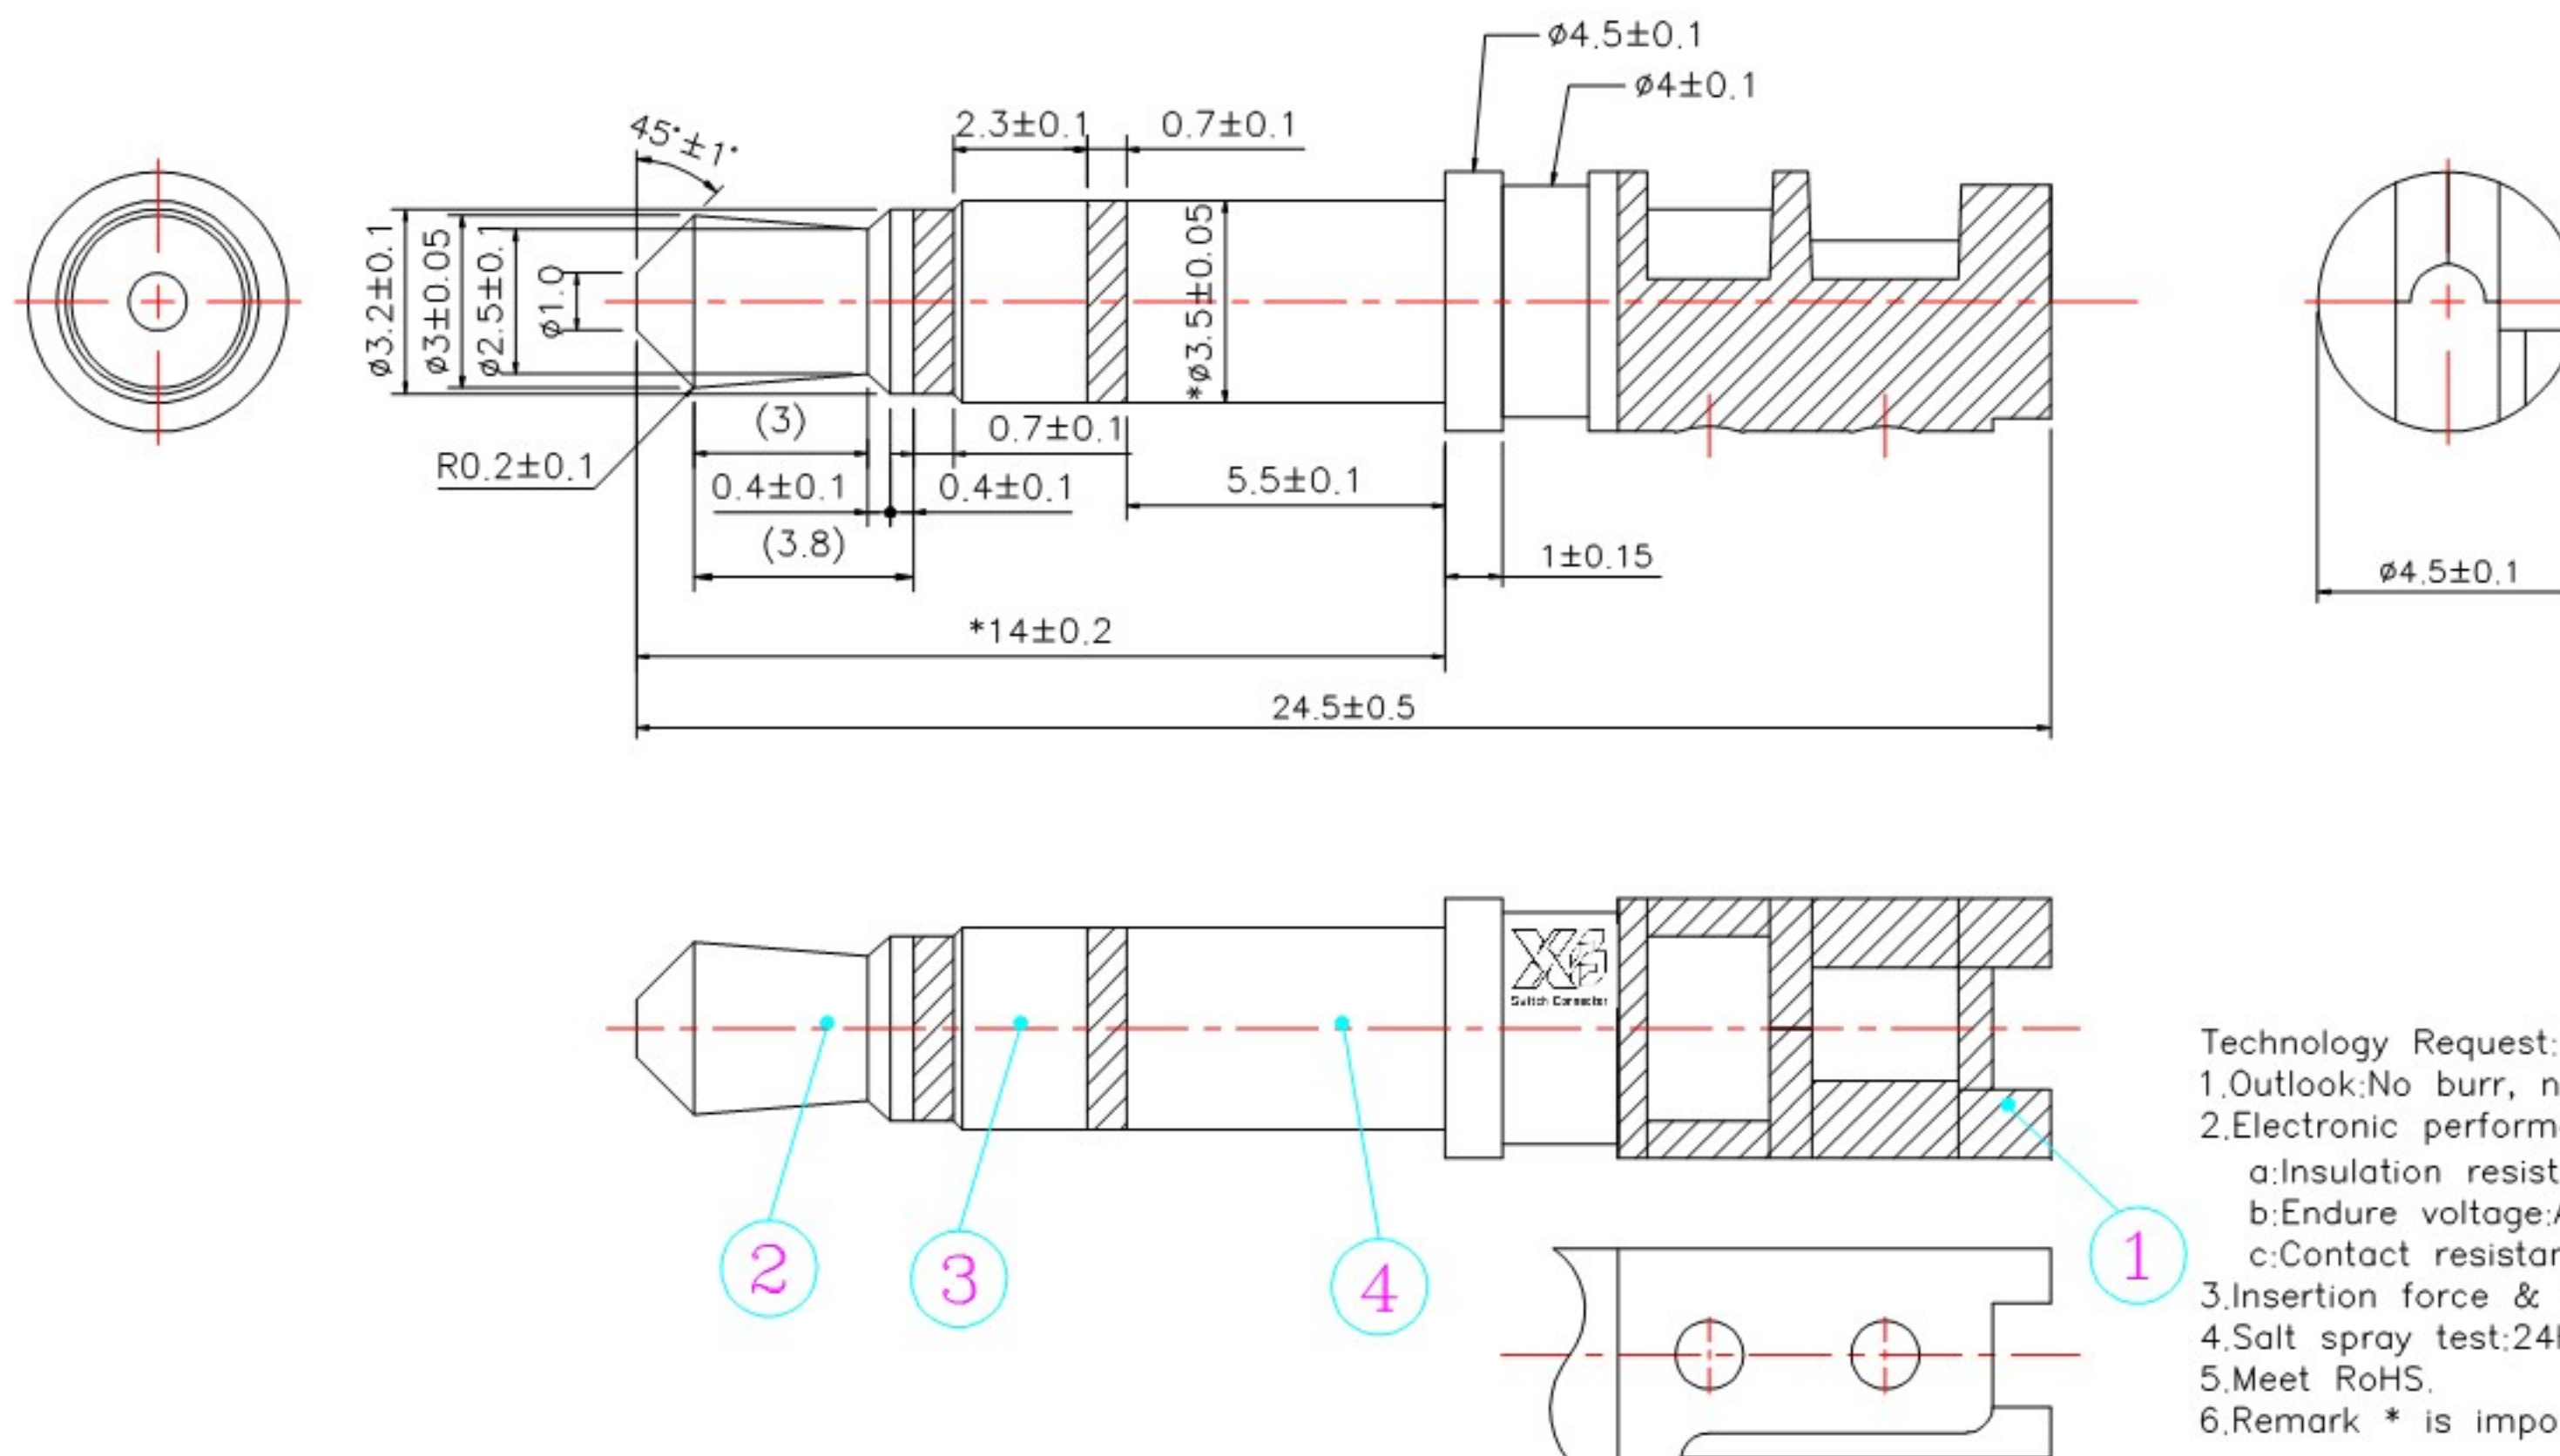

Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance: Above DC500V/100MΩ;
b:Endure voltage:AC500V at 1 minute;
c>Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:0.3-3kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7		
比例 Scale	5:1	xx.:±0.3	6		
视图 Third angle projection		x.x.:±0.1	5		
		.xx.:±0.05	4	4.5*8.5单盘	C3604 Ni 1um-3um
			3	3.48*14.3*2.4二段拉伸管	C2680 Ni 1um-3um
			2	3.18*23*1.1*1.8头	C3604 Ni 1um-3um
			1	PLASTIC	POM BLACK
			NO.	PART	MATERIAL PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	AUDIO PLUG 3.5*4.5*24.5
品名 P/N:	P35345245
图号 DRAWN NO:	CP-05-0047