

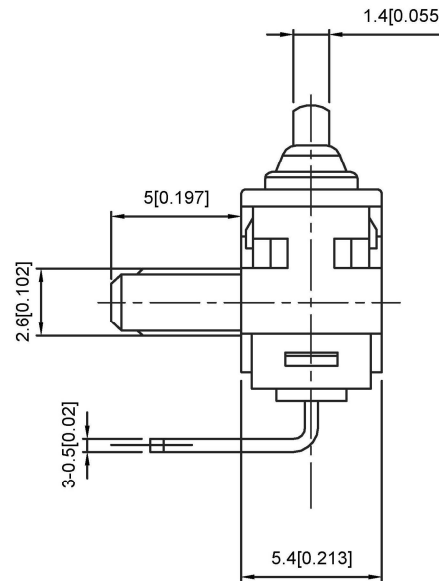


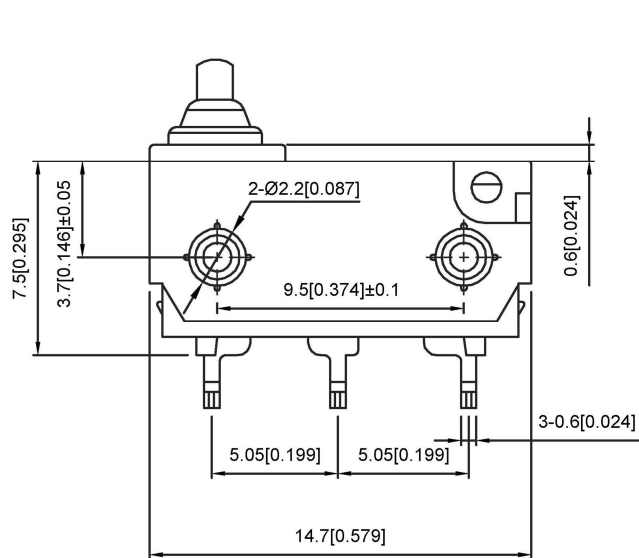

Technical Parameters

- 1.Electrical Rating: 0.1A 125/250VAC
3A/12VDC;0.1A/48VDC
- 2.Electrical lifetime:100 000
- 3.Mechanical lifetime:100 000
- 4.Contact Resistance: ≤100mΩ
- 5.Operating force:1.0~3.5N
- 6.Pretravel:0.3~1.0mm
- 7.Withstand Voltage:Feet and Feet 750V/5S/5mA
Feet and Shell 1500V/5S/5mA
- 8.Insulation Resistance:≥100MΩ(Test Voltage 500VDC)
- 9.Proof Tracking Index(PTI):175V
- 10.Ambient temperature:125°

Circuit diagram



Waterproof grade:IP67

1	Rubber shell	PA66
2	seal ring	Silica gel
3	base	Brass+PA66
4	According to sincerity	POM
5	Contact moving plate	C5191+AgNi10
6	Strut	SUS301-H

							DSND		SCALE: N/A	MODEL TYPE: The micro switch		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: DF1-000CY-1		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4<L ≤ 16	±0.3		APPD		SIZE: A4			
				16<L ≤ 63	±0.4							
				L > 63	±0.5							
	DATE	REVISED	APPROVED									
						UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISIC	
										1/1	A0	