
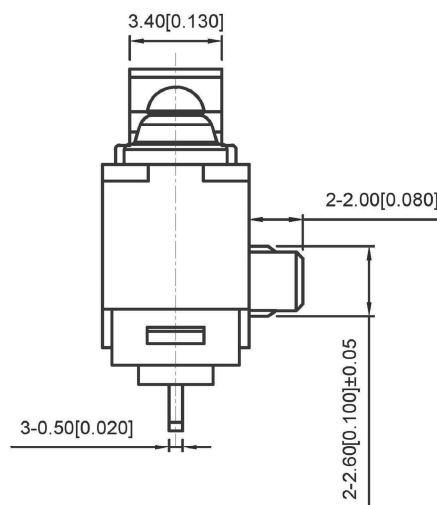
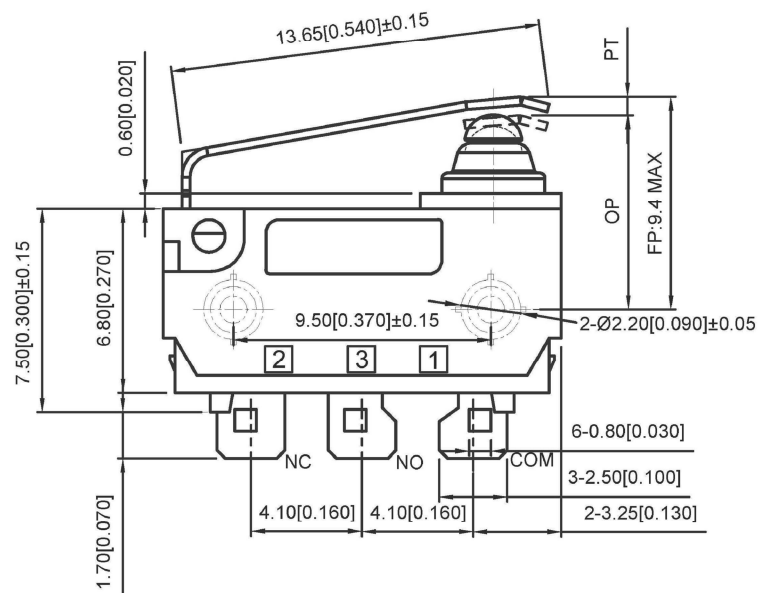


Circuit diagram



Technical Parameters

1. Electrical Rating: 0.1A 125/250VAC
3A/12VDC; 0.1A/48VDC
2. Electrical lifetime: 100 000
3. Mechanical lifetime: 100 000
4. Contact Resistance: $\leq 50\text{m}\Omega$
5. Operating force: 2.2N MAX
6. Pretravel: 3.0mm MAX
7. Withstand Voltage: Feet and Feet 500V/5S/5mA
Feet and Shell 1500V/5S/5mA
8. Insulation Resistance: $\geq 100\text{M}\Omega$ (Test Voltage 500VDC)
9. Proof Tracking Index (PTI): 175V
10. Ambient temperature: 40T85°
11. Operation Position: 7.1±0.5

Waterproof grade: IP67

1	Rubber shell	PA66
2	seal ring	Silica gel
3	base	Brass+PA66
4	According to sincerity	POM
5	Contact moving plate	C5191+AgNi10
6	Strut	SUS301-H

							DSND		SCALE: N/A	MODEL TYPE: Microswitch			
				ANGULAR	±5°		DWN		VIEW: 	PART NO.:			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4<L ≤ 16	±0.3		APPD		SIZE: A4	DF1-1365UNY-1			
				16<L ≤ 63	±0.4								
				L > 63	±0.5								
	DATE	REVISED	APPROVED										
						UNSPECIFIED TOLERANCES							
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD					WEIGHT	SHEET	REVISIC
												1/1	A0