

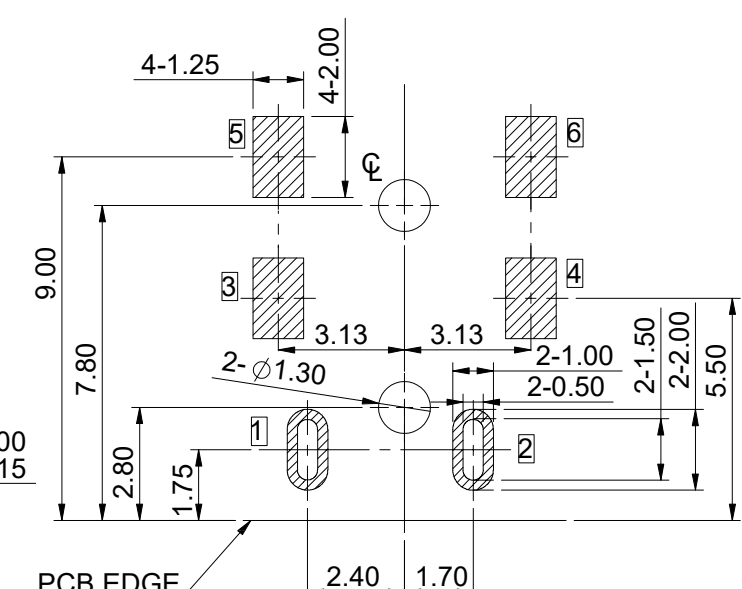
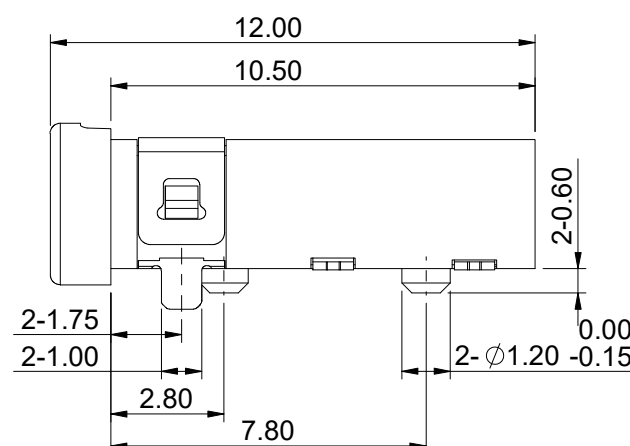
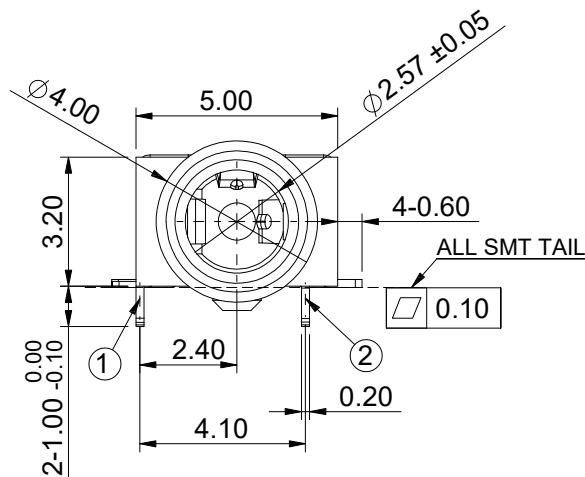
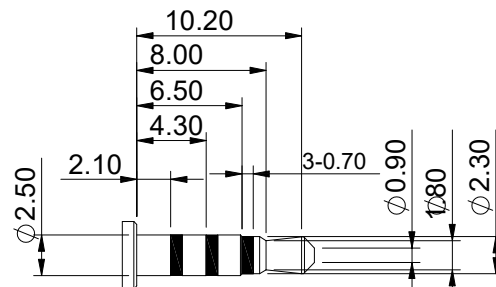


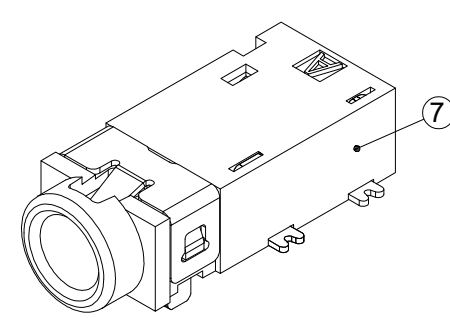


RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ±0.05)

- NOTES:
- 1.CONTACT CURRENT RATING: 1A / 12V.
 - 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 - 3. INSULATION RESISTANCE: 100MΩ MIN.;
 - 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - 5. DURABILITY: 5,000 CYCLES MIN.;
 - 6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
 - 7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;

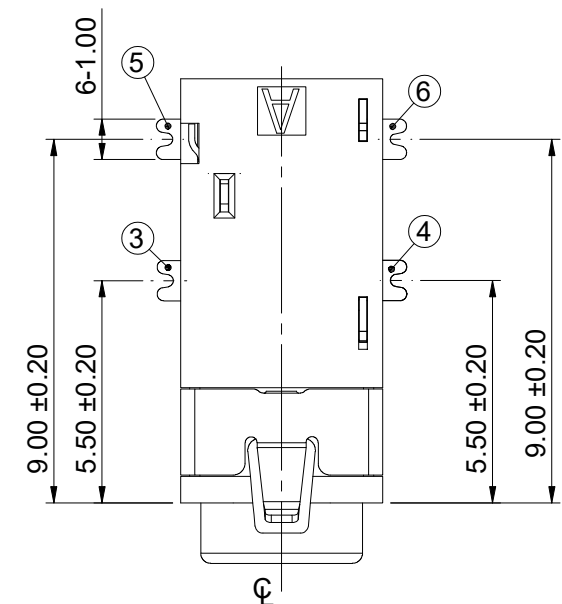

(Ø2.50mm 4 POLE PLUG DETAIL DRAWING)



SCHEMATIC

7	HOUSING	HIGH TEMP	BLACK	———
6	TERMINAL6	COPPER ALLOY	———	Au PLATED
5	TERMINAL5	COPPER ALLOY	———	Au PLATED
4	TERMINAL4	COPPER ALLOY	———	Au PLATED
3	TERMINAL3	COPPER ALLOY	———	Au PLATED
2	TERMINAL2	COPPER ALLOY	———	Au PLATED
1	TERMINAL1	COPPER ALLOY	———	Au PLATED
NO.	DESCRIPTION	MAT,L	COLOR	REMARK

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE: Ø2.50mm PHONE JACK CONN.

PART NO. XB-J2014B06GF

PRODUCT SPEC.

D FILE NAME. J201-4

SCALE 5:1 UNIT:mm A4 SHEET: 1 of 1

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	yangchengwu	06/11/18
						Angle ±2° X ±0.30 .X ±0.25 .XX ±0.20	DESIGN	zhangbin	06/11/18
							CHECK	yangchengwu	06/11/18
							APPRO.	yangchengwu	06/11/18