
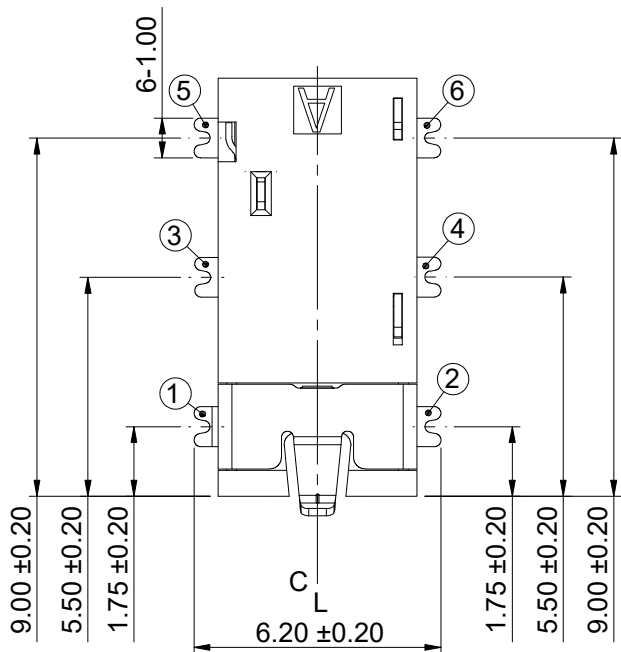
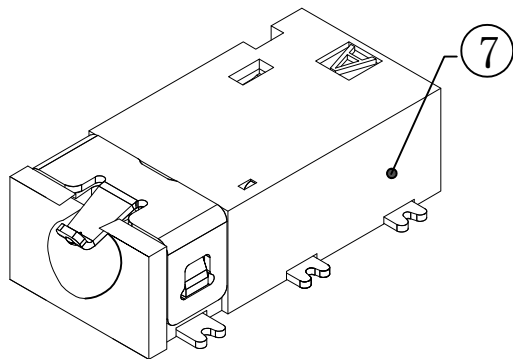
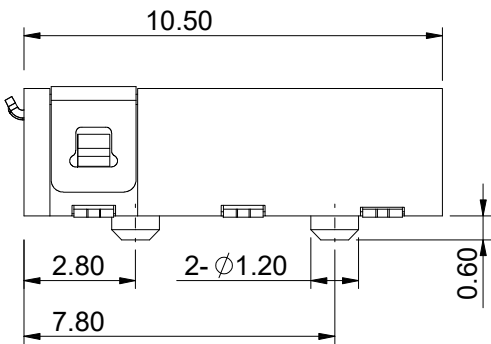
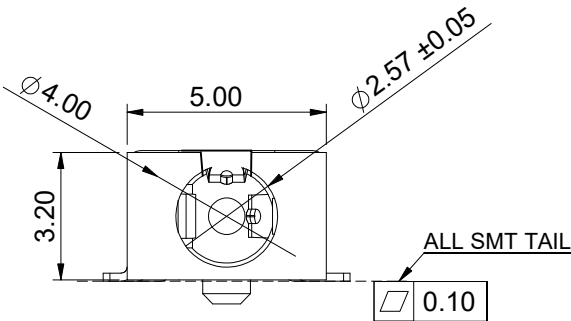



SCHEMATIC

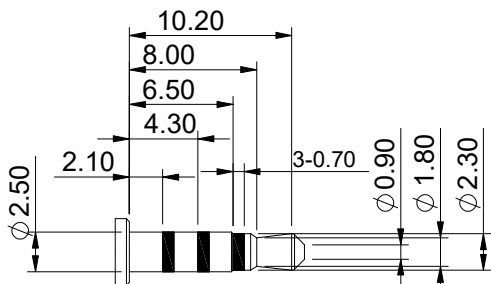

(Ø2.50mm 4 POLE PLUG DETAIL DRAWING)

- NOTES:
1. CONTACT CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 100MΩ MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
 7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ±0.05)

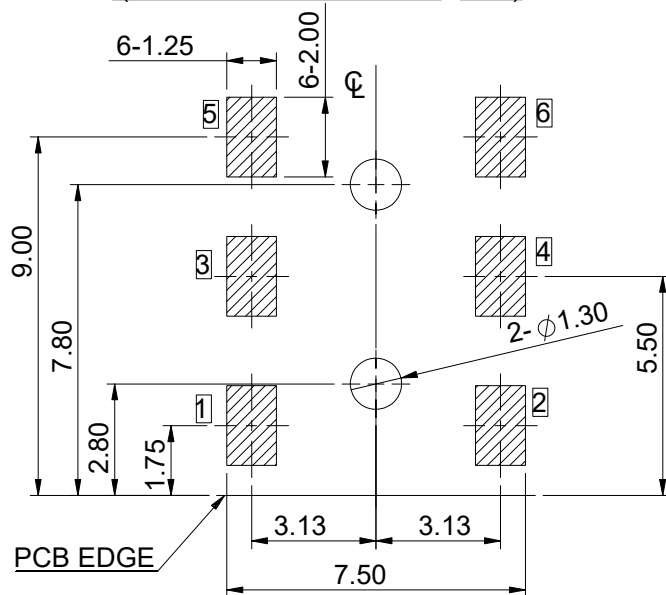

7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL6	COPPER ALLOY		
5	TERMINAL5	COPPER ALLOY		
4	TERMINAL4	COPPER ALLOY		
3	TERMINAL3	COPPER ALLOY		
2	TERMINAL2	COPPER ALLOY		
1	TERMINAL1	COPPER ALLOY		
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE,
GENERAL TOLERANCE:

X. xxx ±0.10
X. xx ±0.20
X. x ±0.30
X. ±0.50

ANGULAR:
X. xx ±1°
X. x ±3°
X. ±5°

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


TITLE: Ø2.50mm PHONE
JACK CONN.
客户图

P/N: XB-J2015B06G1005

MODEL: _____

DRAW NO.: _____

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/1

DESIGN	ZB	2018.09.30	
CHECK	ZB	2018.09.30	
APPROVAL	YCW	2018.09.30	

N/A	A	NEW DRAWING	2018.09.30	ZB
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE