
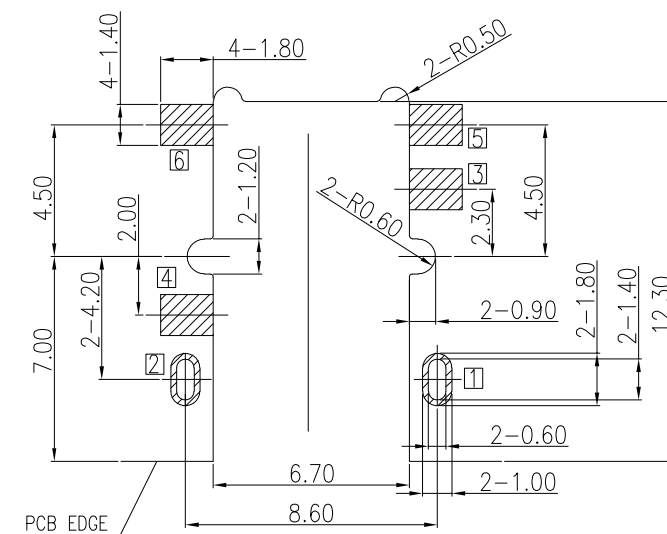


1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 50m Ω Max.(Initial),
100m Ω Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 M Ω Min., 500VDC.(Initial),
50 M Ω Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0KgF MAX.;
 - 4.2. UNMATING FORCE: 0.3KgF MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.

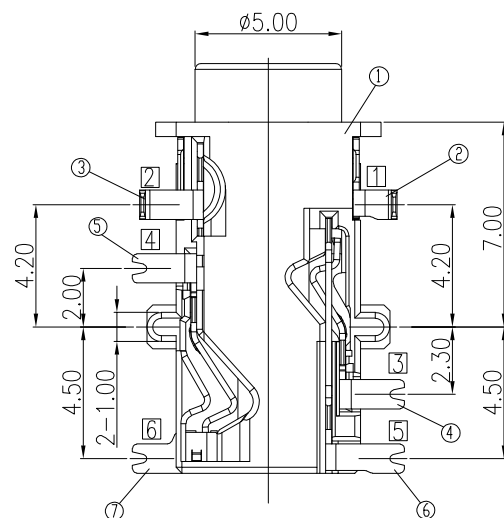

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

	PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC
C			
B			

A				
	N/A	A	新版发行	2020.07.10
	ECN NO.	REV.	DESCRIPTION	DATE CHANGE

⑦	TERMINAL 6	6	1	COPPER ALLOY	CONTACT AREA: GF SOLDER AREA: GF, Ni 40u" OVER ALL	T=0.20mm
⑥	TERMINAL 5	5	1	COPPER ALLOY		T=0.20mm
⑤	TERMINAL 4	4	1	COPPER ALLOY		T=0.20mm
④	TERMINAL 3	3	1	COPPER ALLOY		T=0.20mm
③	TERMINAL 2	2	1	COPPER ALLOY		T=0.20mm
②	TERMINAL 1	1	1	COPPER ALLOY		T=0.20mm
①	HOUSING		1	HIGH TEMP	BLACK	UL94 V-0
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK	

UNLESS OTHERWISE,
GENERAL TOLERANCE:

X.xxx	±0.10
X.xx	±0.20
X.x	±0.30
X.	±0.38

ANGULAR:

X.xx	±1°
X.x	±3°
X.	±5°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE:

ø3.5mm Phone Jack CONN.

客户图

THIRD ANGLE PROJECT

P/N:	XB-J304WB06GA001
------	------------------

MODEL:	J304-W
--------	--------

DRAW NO. _____

SCALE:	SIZE:	SHEET:
1:1	A4	1/1