


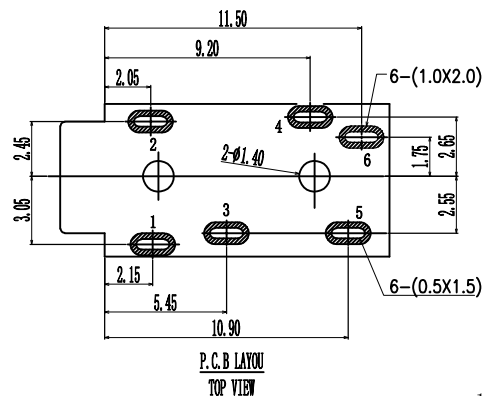
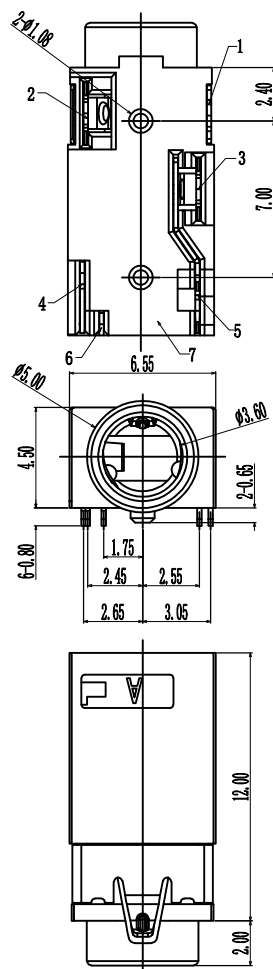



RoHS Compliant

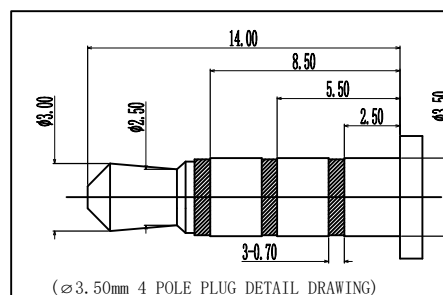

3D VIEW

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX. ;
3. INSULATION RESISTANCE: 100MΩ MIN. ;
4. DIELECTRIC WITHSTANDING: 500V AC MIN. ;
5. DURABILITY: 5,000 CYCLES MIN. ;
6. CONNECTOR MATING FORCES: 30N MAX. ;
7. CONNECTOR UNMATING FORCES: 3N MIN. ;

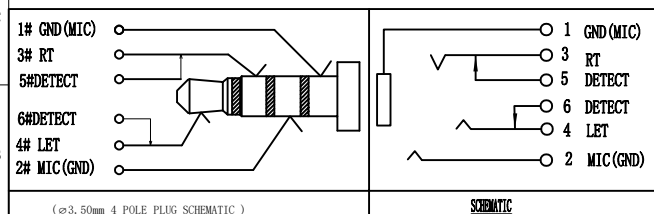

7	HOUSING	HIGHT TEMPERATURE PLASTIC COLOR BLACK		1
6	TERMINAL 6#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL GOLD PLATING	T=0.20mm	1
5	TERMINAL 5#	ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
4	TERMINAL 4#		T=0.20mm	1
3	TERMINAL 3#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL GOLD PLATING	T=0.20mm	1
2	TERMINAL 2#	ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
1	TERMINAL 1#	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.20mm	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
UNLESS OTHERWISE, GENERAL TOLERANCE: X. xxx ±0.10 X. xx ±0.20 X. x ±0.30 X. ±0.50 ANGULAR: X. xx ±1° X. x ±3° X. ±5°				
XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				
TITLE: ø3.5mm PHONE JACK H=4.5mm CONNECTOR		P/N: XB-J363BR06GA002 MODEL: DRAW NO.:		
THIRD ANGLE PROJECTION		UNIT: mm	SCALE: 1:1	SIZE: A4
				SHEET: 1/1

DESIGN	ZB	2017.12.23	
CHK	ZB	2017.12.23	
APPROVAL	YCW	2017.12.23	
ECN NO.	REV.	DESCRIPTION	DATE
N/A	A	NEW DRAWING	2017.12.23
			ZB