





RoHS Compliant

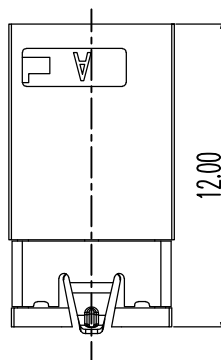


3D VIEW

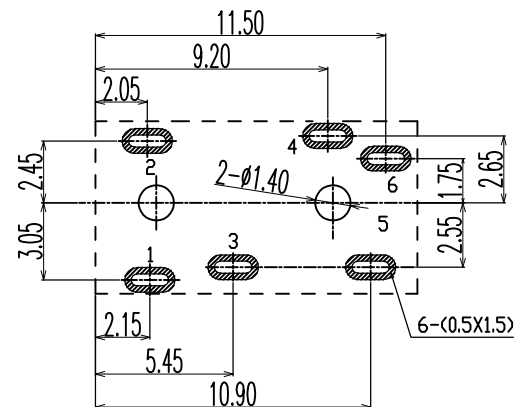

P.C.B. LAYOUT  
TOP VIEW

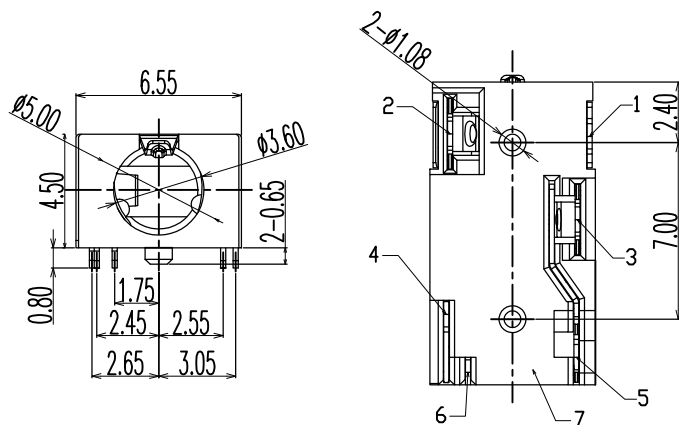

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 150 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

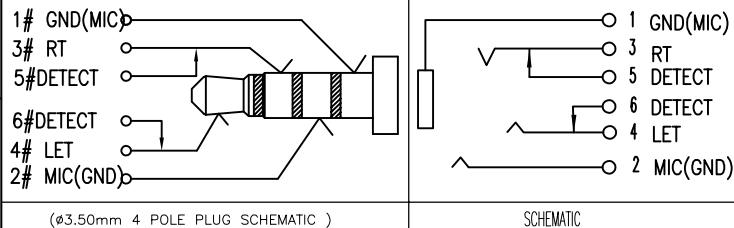

7	HOUSING	1	PA9T COLOR BLACK	
6	TERMINAL 6#	1	BRASS; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA	T=0.20mm
5	TERMINAL 5#	1	BRASS; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA	T=0.20mm
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
1	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
ITEM	NAME	QTY	DESCRIPTION	NOTE

UNLESS OTHERWISE,  
GENERAL TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10

ANGULAR ±3°

**东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONIC CO., LTD.


TITLE:  
ø3.5mm PHONE JACK H=4.5 mm  
DIP TYPE CONNECTOR

P/N: XB-J363ER06GA005

MODEL:

DRAW NO.:

THIRD ANGLE PROJECTION



UNIT:	SCALE:	SIZE:	SHEET:
mm	1:1	A4	1/1