
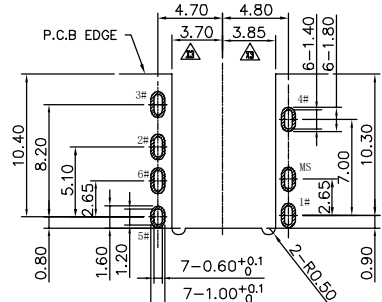
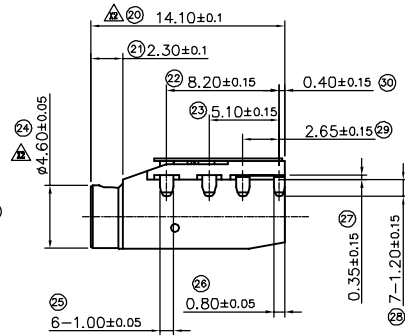
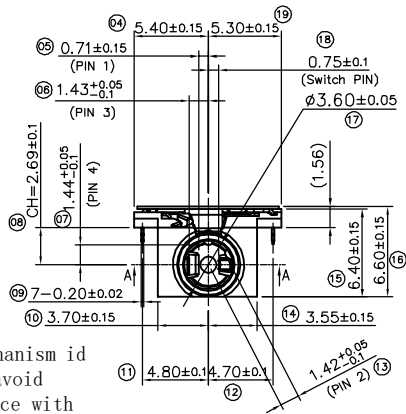


HSF






REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
X2	2111001	Modify dimensions: 4.4→4.6, 14.0→14.1.	Bull.pan		2021.11.05
X3	---	Modify dimensions: 3.75→3.7, 3.95→3.85.	Bull.pan		2022.02.14

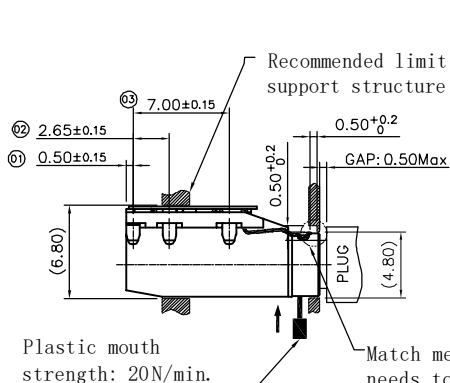

PCB HOLES(TOP VIEW) t=1.0mm
NOTE: GENERAL TOLERANCE: ±0.05mm

PRODUCT NO.
PJ50-07 F B G1-00
① ② ③ ④ ⑤
①SERIES: PJ50: PHONE JACK
②POSITION: 07: 7PIN
③MATERIAL: F: HIGH TEMP
④COLOR CODE: B: BLACK
⑤PLATING CODE: G1: GOLD 1~3u"

DATE CODE:
XI BNANG
YEAR(1=2021, 2=2022)
Shift(D=day shift, N=night shift)
Date(1=01, ..., A=10, ..., H=17, J=18, ..., N=22, P=23, ..., X=31)
Month(1=1, ..., A=10, B=11, C=12)

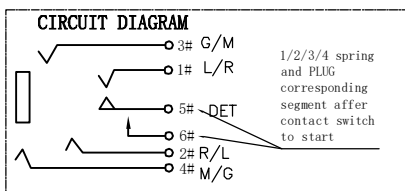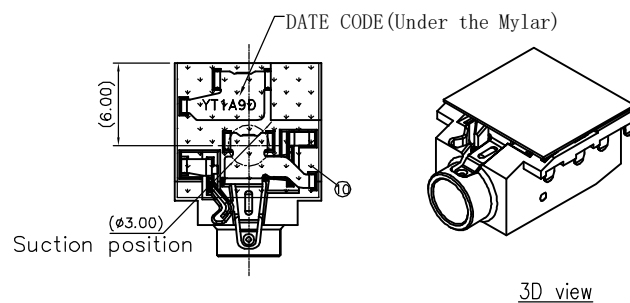

Specification:

- Rating : DC 12V 0.5A;
- Contact resistance: ≤50mΩ;
After test: Δ20mΩ
- Insulation resistance: ≥1000MΩ (500VDC);
After test: ≥100MΩ
- Withstand voltage: 500VAC RMS 50 (60) Hz, 1 minute;
- Insertion force: 10N~25N;
Extraction force: 6N~18N;
- life test: 5000cycles ;
- Operation temperature range: -20℃~70℃
- Preservative temperature range: -40℃~85℃

10	MYLAR	1pcs	Kapton t=0.20	Yellow
9	shell	1pcs	Stainless steel(SUS304-1/2H) t=0.20	Ni 30u" Min
8	6# terminal	1pcs	Phosphor bronze(C5210-EH) t=0.20	1-3u" Au on contact area;
7	5# terminal	1pcs	Phosphor bronze(C5210-EH) t=0.20	1-3u" Au on solder area;
6	4# terminal	1pcs	Stainless steel(SUS304-1/2H) t=0.20	All over 30u" Ni Min.
5	3# terminal	1pcs	Phosphor bronze(C5191-H) t=0.20	1-3u" Au on contact area;
4	2# terminal	1pcs	Phosphor bronze(C5191-H) t=0.20	1-3u" Au on solder area;
3	1# terminal	1pcs	Stainless steel(SUS304-1/2H) t=0.20	All over 30u" Ni Min.
2	Separator	1pcs	HI-TEM.THERMOPLASTIC(PA10T R6036NH)	Black, HF (全新料)
1	Housing	1pcs	HI-TEM.THERMOPLASTIC(PA10T R6036NH)	Black, HF (全新料)
ITEM	NAME	Q'TY	MATERIAL	FINISH


CUSTOMER DRAWING		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
GENERAL TOLERANCE X. ±0.30 .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING Bull.pan	TITLE: 6.6H 7PIN PHONE JACK(CH=-2.69)	
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	APPROVED	P/N: XB-PJ50- 07FBG1-00	
	DATE 2022.02.14	DRAWING NO. XB-C-PJ50-00	
	UNIT	SCALE	1:1
	SIZE	A4	SHEET
	of 1	REV	X3

HSF

□ Packing Notes:

1. Reel : 600pcs/ Reel.
2. Carton : 4800pcs/ 8 Reel/ Carton.


Pull Out Direction

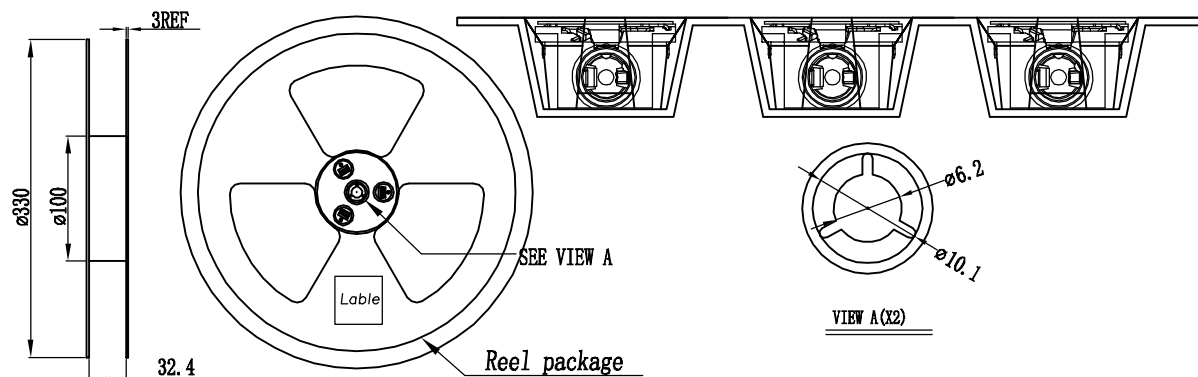

NOTE:
1.CARRIER TAPE PACKING LENGTH
GATHER MATERIAL DIRECTION


INPUT MATERIAL DIRECTION

END

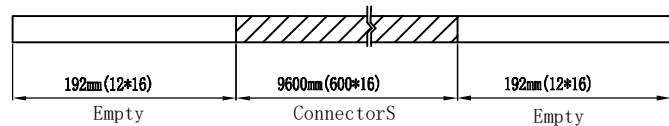


START

2.FEELING FORCE: 0.2N-1.5N (20g-150g)

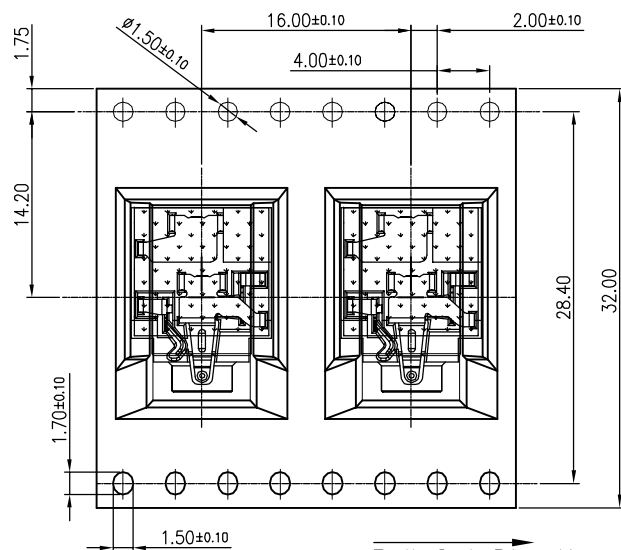


Pull Out Direction

0.35




- 1) Seal the carton with tape;
- 2) Attach the label to the side of the carton.

Lable

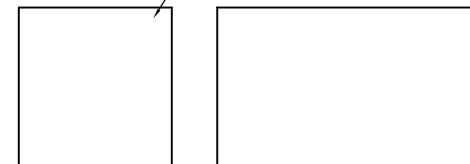

REMARK:

- 1).If there are empty zero boxes, they must be filled with buffer materials.
- 2). Handle with care during handling.
- 3). During transportation, do not stack too much and do not have heavy pressure.
- 4). The upper tape must be flat when sticking the lower tape, and there shall be no bubbles at the sticking place.

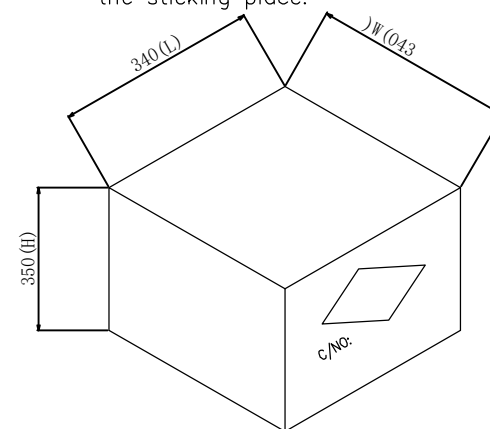PACKING
DRAWING东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE
X. ±0.20
.XX ±0.15
.XXX ±0.10

ANGLE TOLERANCE
X. ±3°
.XX ±2°
.XXX ±1°

DRAWING

Bull. pan

APPROVED

DATE

2022.02.14

TITLE: 6.6H 7PIN PHONE JACK
(CH=-2.69)

P/N: XB-PJ50-07FBG1-00

DRAWING NO. XB-P-PJ50-00



UNIT mm

SCALE

1:1

SIZE

A4

SHEET

1of1

REV

X3