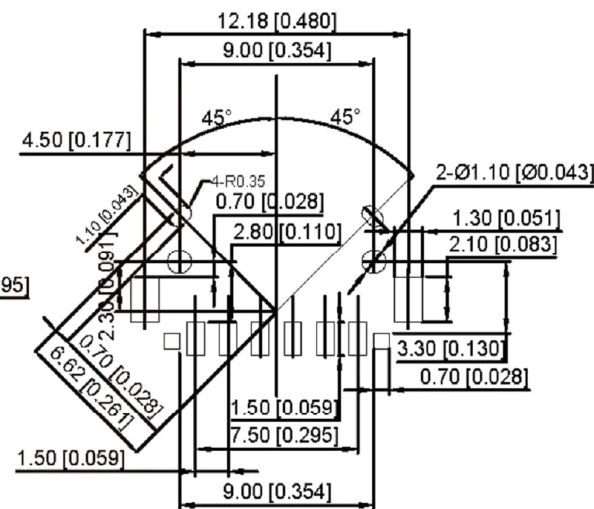
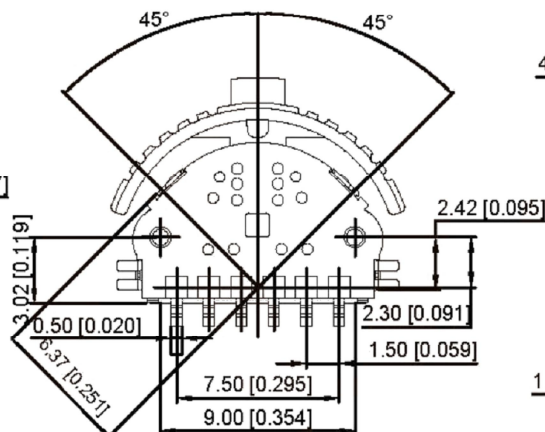




1. Rating: DC 5V 10mA
2. Contact Resistance: 100mΩ MAX
3. Insulation Resistance: 100MΩ MIN
4. Soldering Temper: 260±5°/5s
5. Mechanical Life: 100,000 cycles
6. Ever Portion 80 ± 50 gf
7. Push Portion 205 ± 80 gf
8. Travel: -24° 0° +24°

		—				—
⑥	Terminal	—	6	Brass	Plating silver	—
⑤	Contact	—	1	F.ag/Brass	Plating silver	—
④	Base	—	1	Pa46		—
③	Spring	—	5	Sus	Natural	—
②	Cover	—	1	Sus	Natural	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: MULTI-FUNCTIONNAL SWITCH			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4<L ≤ 16	±0.3		APPD		SIZE: A4	TM-2122			
				16<L ≤ 63	±0.4								
	DATE	REVISED	APPROVED	L > 63	±0.5								
						UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISI
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD					1/1	A0	