
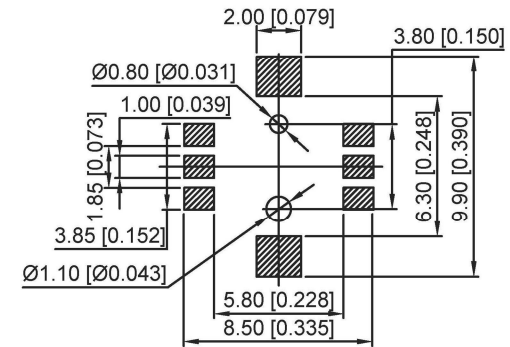
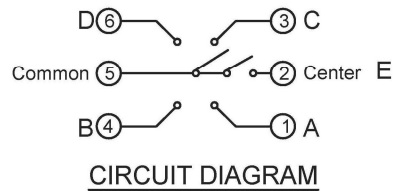
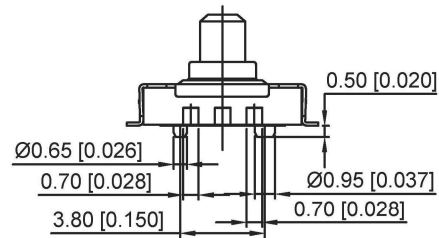
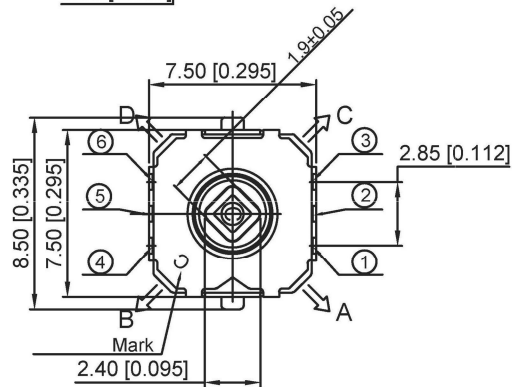


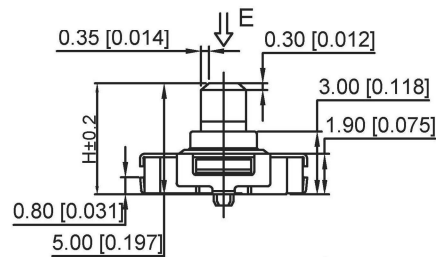

P.C.B LAND DIMENSION

SPECIFICATION

- 1.Rating:DC 12V 50mA Max
- 2.Contact resistance: 500mΩ MAX
- 3.Insulation resistance: 100MΩ Min
- 4.Dielectric strength: 250VAC/min
- 5.Dielectric strength: 0.15±0.10mm
(4-DIRECTION)0.25±0.15mm

PAPT NO	TM-4175-X-X	
Operating force	A	4 Direction 180±50gf Center 250±50gf
	B	4 Direction 240±50gf Center 360±50gf
Height	H:A:5 B:6	

ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑥	Terminal	—	6	Brass	Plating silver	—
⑤	Contact	—	1	F.ag/Brass	Plating silver	—
④	Base	—	1	Pa46		—
③	Spring	—	10	Sus	Natural	—
②	Cover	—	1	Sus	Natural	—
①	Keystake	—	1	Pa46		—

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.adxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: MULTI-FUNCTIONAL SWITCH		
DWN		VIEW:	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	TM-4175-X-X		
			WEIGHT	SHEET	REVISIC
				1/1	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD