

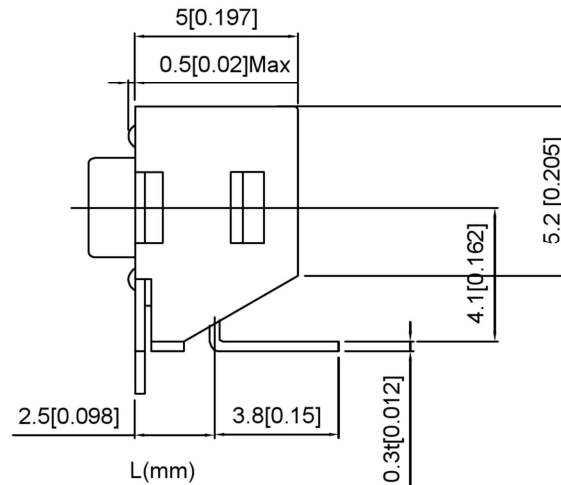
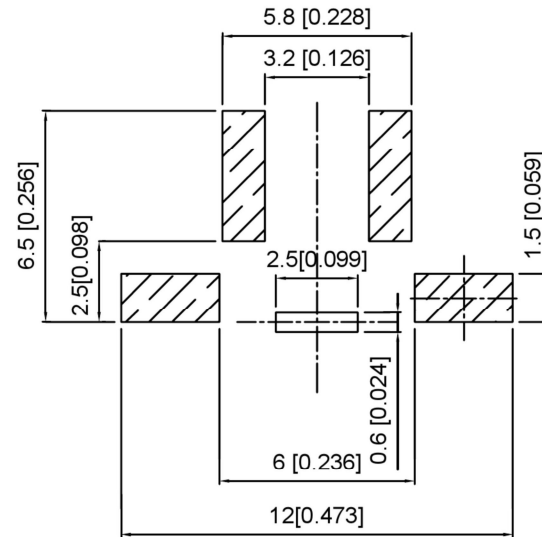
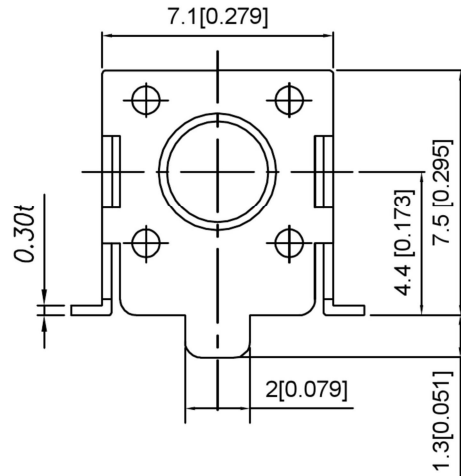


P.C.B Mounting Pattern Dimension

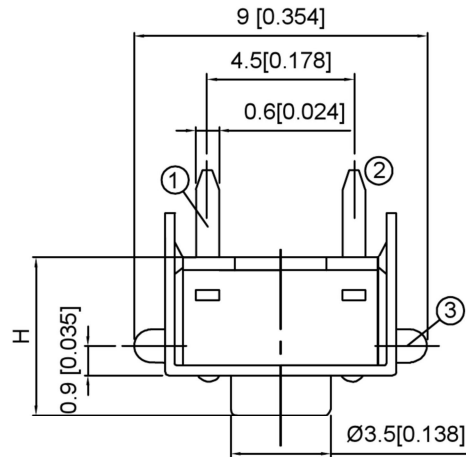

Circuit Diagram



Code-x	H
A	4.3
B	4.5
C	5.0
D	5.5
E	6.0
F	6.5
G	7.0
H	7.5
I	8.0

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TS-1102US-X-X
Operating Force	B:160gf C:260gf
Height	Code-x

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
				UNSPECIFIED TOLERANCES	
	DATE	REVISED	APPROVED		
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		VIEW: 	PART NO.: TS-1102US-X-X		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
WANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISI
				1/1	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD