

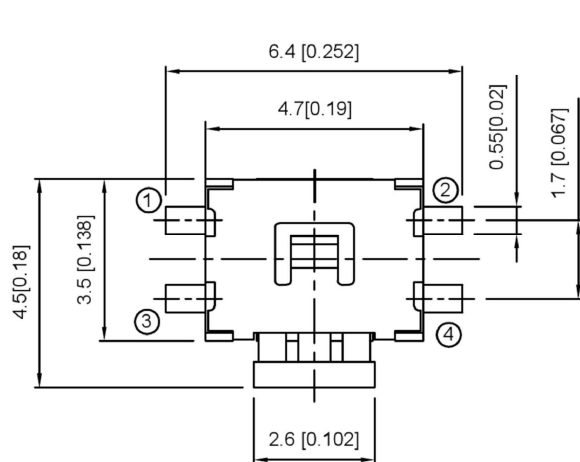


SPECIFICATION


Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.20mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

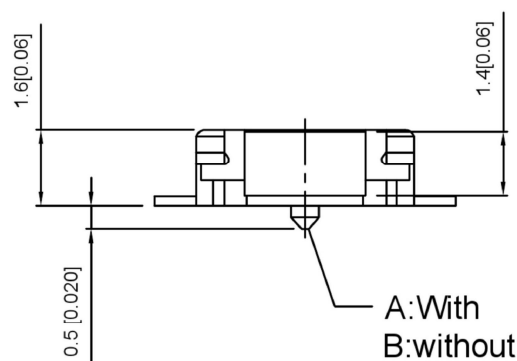

PCB MOUNTING PATTERN DIMENSION

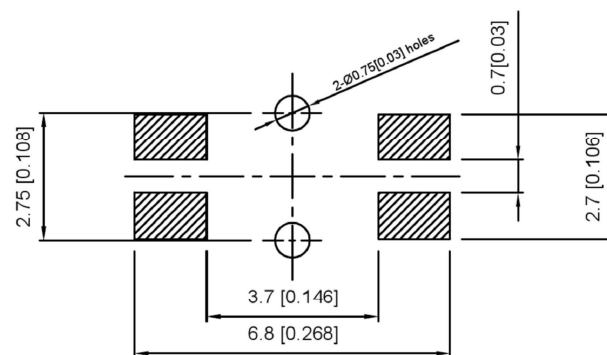

PAPT NO	TS-1186D-X-X
Operating Force	B:160gf C:260gf
Height	H:4.5
Fixed column	A:With B:Without



⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: TS-1186D-X-X				
				$L \leq 4$	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				$4 < L \leq 16$	±0.3		APPD		SIZE: A4					
				$16 < L \leq 63$	±0.4									
				$L > 63$	±0.5									
		DATE	REVISED	APPROVED										
						UNSPECIFIED TOLERANCES						WEIGHT	SHEET	REVISI
www.alpsr.com www.gdxjdz.com www.xbswitch.com								DONG GUAN XI BANG ELECTRONIC CO., LTD					1/1	A0