



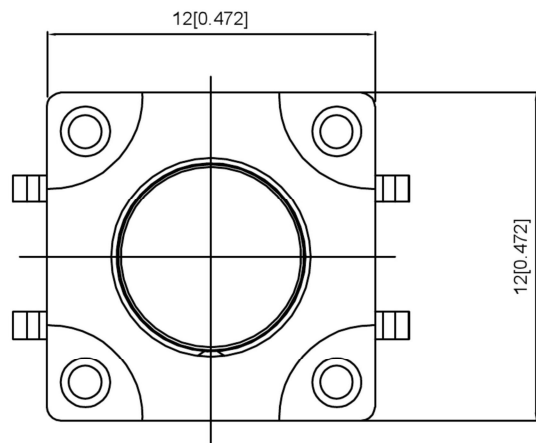

Code-X	H	Code-X	H
E	6.0	Q	12
F	6.5	R	12.5
G	7.0	S	13.0
H	7.5	T	13.5
I	8.0	U	14.0
J	8.5	V	15.0
K	9.0	W	15.5
L	9.5	X	16
M	10.0	Y	16.5
N	10.5	Z	17
O	11.0	18	18
P	11.5	19	19



Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TS-FS1212T-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-X

CIRCUIT DIAGRAM

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PA46		—
②	Cover	—	1	PA46		—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH			
							DWN		VIEW: 	PART NO.: TS-FS1212T-X-X			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				
				DATE	REVISED	APPROVED					WEIGHT	SHEET	REVISI
							UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxdz.com www.xbswitch.com							DONG GUAN XI BANG ELECTRONIC CO., LTD					1/1	A0