


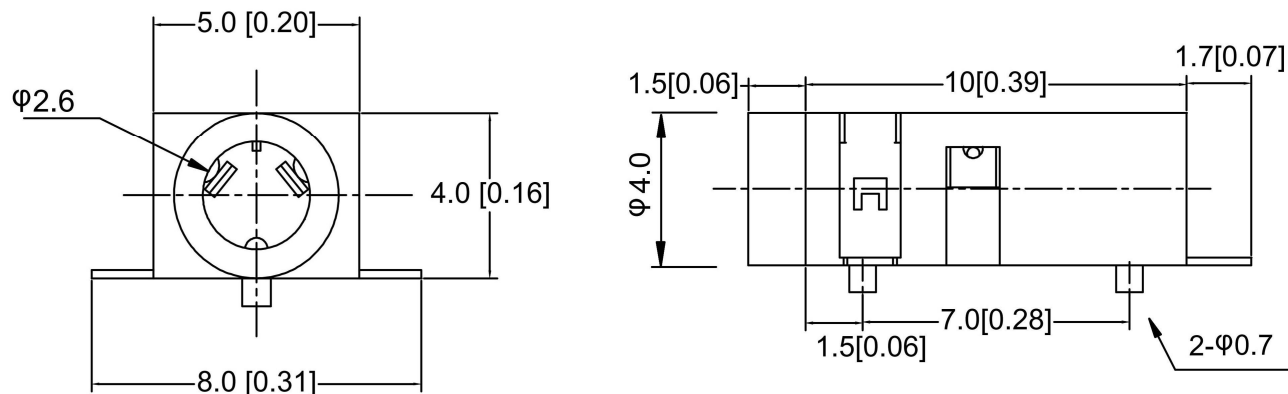

Specifications:

Voltage rating:30V AC/DC

Current rating:0.5 A AC/DC


Withstanding voltage: 500V AC/minute

Temperature range:-30° ~+70

Insulation resistance:≥100MΩ

Contact resistance: ≤30mΩ

After environmental testing:≤20mΩ

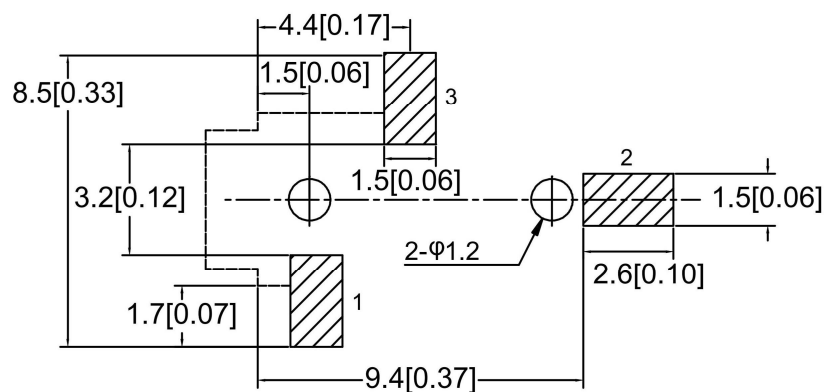

P.C.B LAYOUT TOP VIEW

PIN	PJ-208
Schematic	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	AG
terminal 2	Phosphor Bronze	AG
terminal 3	Phosphor Bronze	AG
plastic	PAA	

							DSND		SCALE: N/A	MODEL TYPE: ERAPHONE SOCKET		
							DWN		VIEW: 	PART NO.: PJ-208		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD		WEIGHT		SHEET	REVISION	
										1/1	A0	