

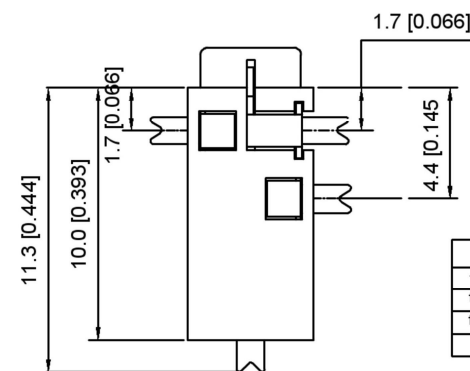
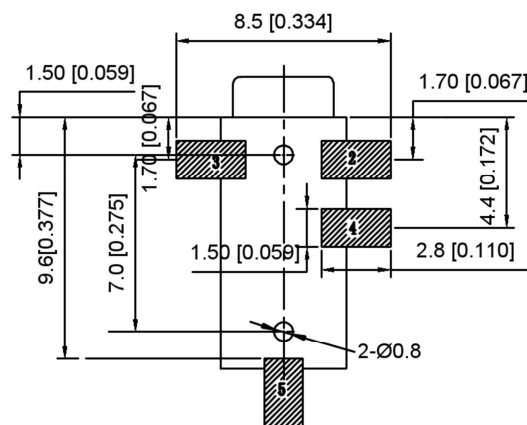

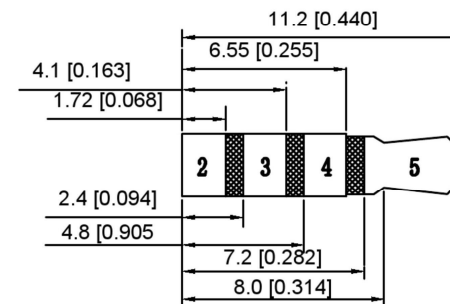
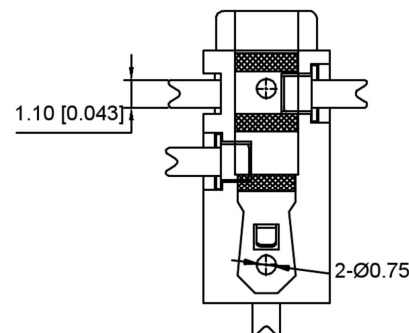


NOTES

注释

- VOLTAGE RATING: 30V DC
额定电压: 30V DC
- CONTACT CURRENT RATING: 0.5A
触点额定电流: 0.5A
- CONTACT RESISTANCE: 30 mΩ MIN.
接触电阻: 最大 30 mΩ
- INSULATION RESISTANCE: 100MΩ MAX.
绝缘电阻: 最大 100MΩ
- DIELECTRIC WITHSTANDING: 36V AC MIN.
耐介质电压: 500V AC MIN.
- INSTRING: 3-20N
插拔力: 3-20N
- TEMPERATURE RANGE: -30°C~70°C
工作温度: -30°C~70°C
- LIFE: 5000次 CYCLES
寿命: 5000次循环

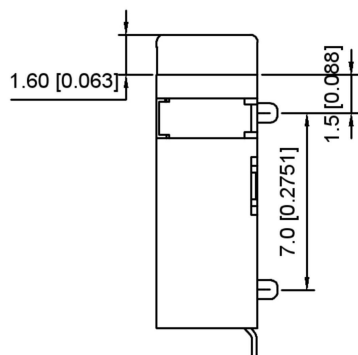

P.C.B LAYOUT TOP VIEW

	MATERIAL	PLATING
terminal1	Phosphor Bronze	AG
terminal2	Phosphor Bronze	AG
terminal3	Phosphor Bronze	AG
	Plastic	ppA

							DSND		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: PJ-218A2-SMT		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4<L ≤ 16	±0.3		APPD		SIZE: A4			
				16<L ≤ 63	±0.4							
				L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				
www.alpsr.com www.gdxjdz.com www.xbswitch.com								WEIGHT	SHEET	REVISION		
									1/1	A0		