
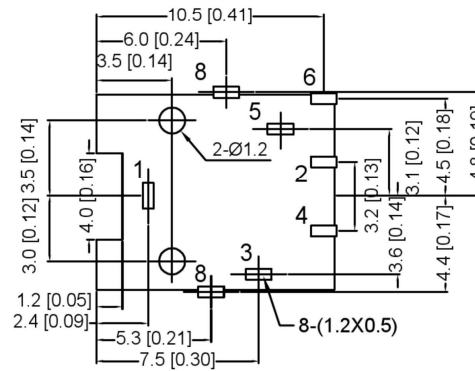
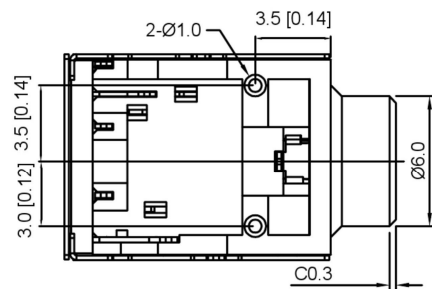

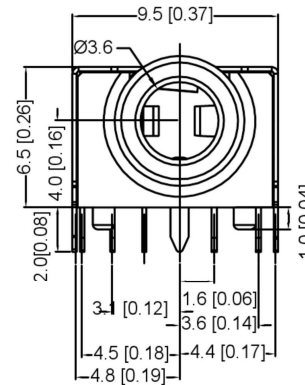
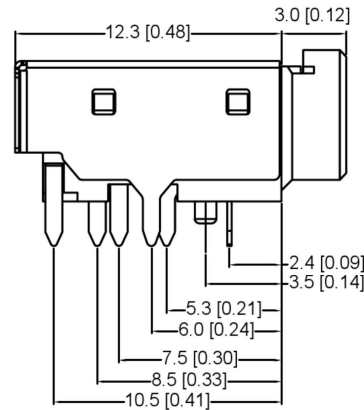




SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles。

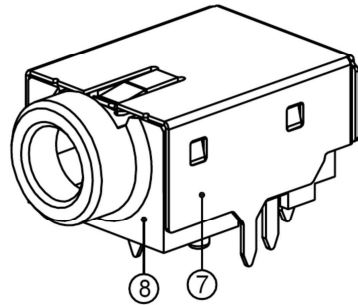

P.C.B LAYOUT
TOP VIEW

料号	Color
PJ-3043-B	BLACK
PJ-3043-R	Red
PJ-3043-G	Green

		MATERIAL	PLATING
8	SHELL	1 SUS301 0.2t	Ni60U"
7	HOUSING	1 PA9T	
6	CONTACT FOOT	1 COPPER ALLOY C5191	Ag15u" OVER Ni20U"
5	SPRING PIECE	1 COPPER ALLOY C5191	Ag15u" OVER Ni20U"
4	CURVE PIECE	1 COPPER ALLOY C5191	Ag15u" OVER Ni20U"
3	SPRING PIECE	1 COPPER ALLOY C5191	Ag15u" OVER Ni20U"
2	SPRING PIECE	1 COPPER ALLOY C5191	Ag15u" OVER Ni20U"
1	CONTACT FOOT	1 COPPER ALLOY C5191	Ag15u" OVER Ni50U"

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-3043-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0