


SCHEMATIC

PJ-3135-	PJ-3136-


R:red	G:green
Y:yellow	B:black
W:white	T:transparent

SPECIFICATION

- 1.Rating: DC 30V 0.5A
- 2.Contact resistance: $\leq 30\text{m}\Omega$
- 3.Insulation resistance: $\geq 100\text{m}\Omega$
- 4.Withstand voltage: 500VAC
- 5.Insertion and extraction force: 3-20N
- 6.life test: 5,000 cycles

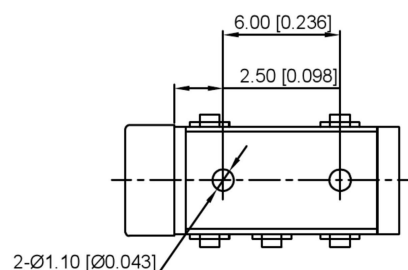

PJ-3135-



Ø3.5 MATING PLUG

PJ-3136-

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Phosphor Bronze	tin
plastic	Pbt	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L ≤ 16	±0.3
				16<L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
DWN		VIEW: 	PART NO.: PJ-313X-X		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0