


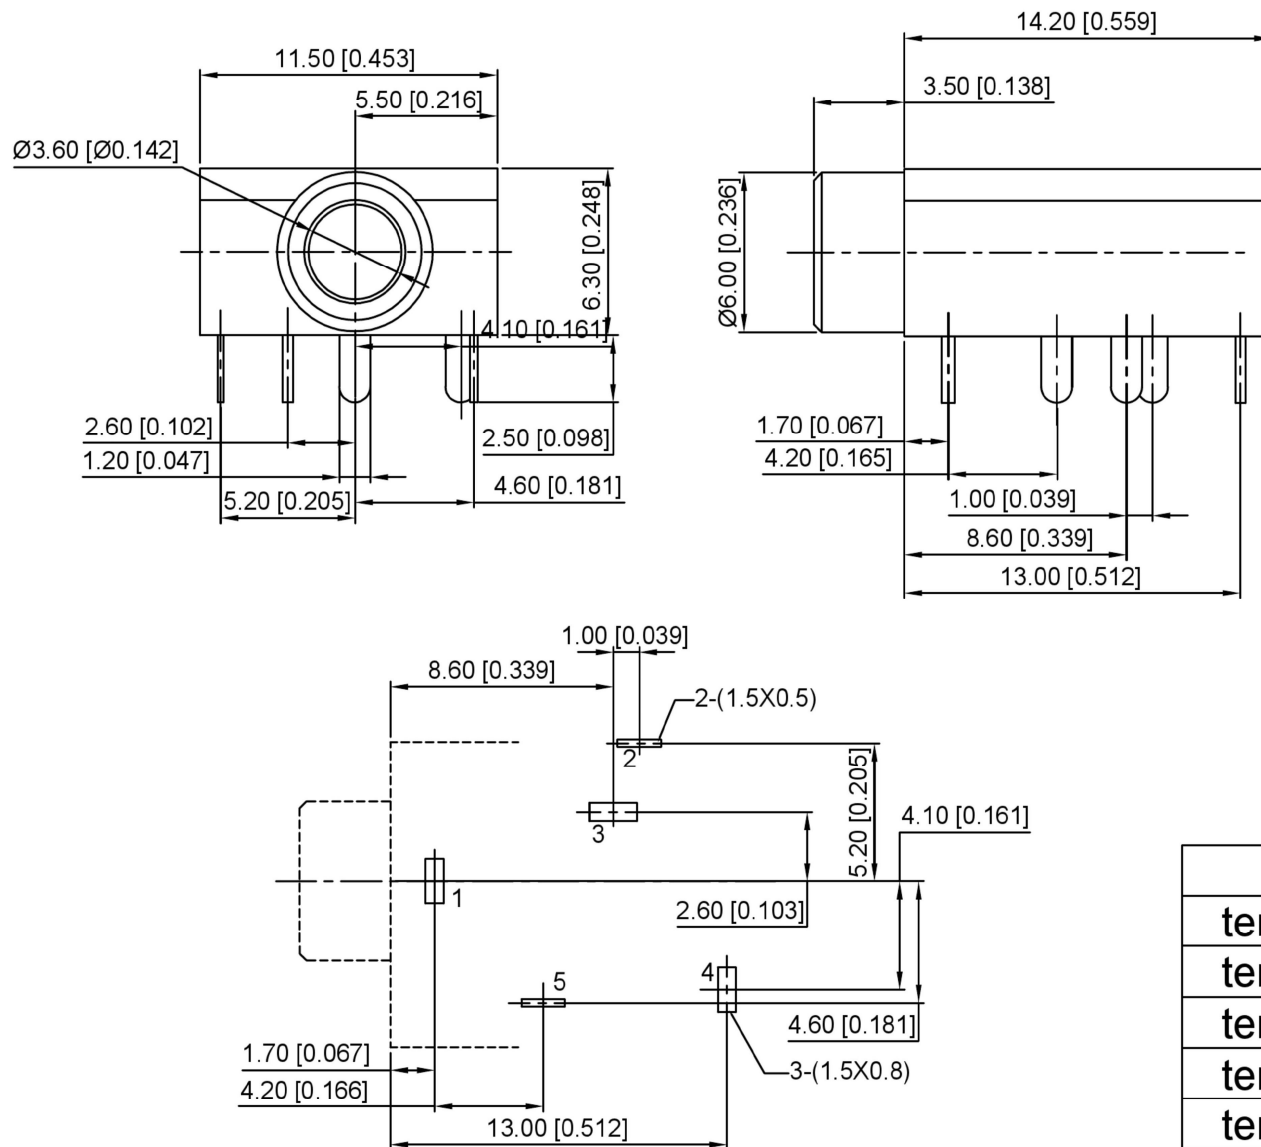

SPECIFICATION

- 1.Rating: DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V)
- 4.Withstand voltage: 500VAC;
- 5.Insertion and extraction force:3-20N;
- 6.life test: 5,000 cycles.

SCHEMATIC

PJ-32400	PJ-32401	PJ-32402	PJ-32403

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-3240X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
REVISIONS			WEIGHT
DATE	REVISED	APPROVED	SHEET
UNSPECIFIED TOLERANCES			REVISION
www.alpsr.com www.gdxdz.com www.xbswitch.com			1/1
DONG GUAN XI BANG ELECTRONIC CO., LTD			A0