

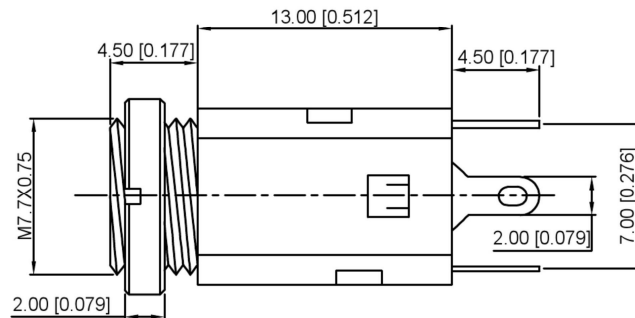
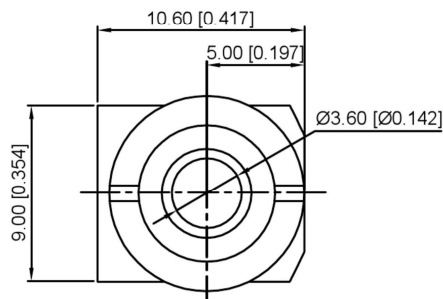


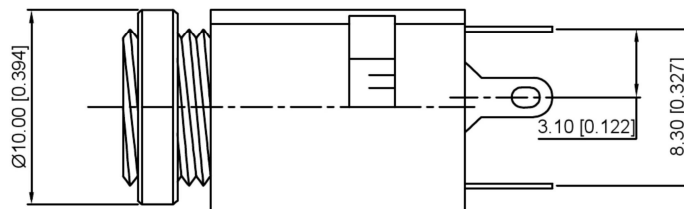

SCHEMATIC

PJ-3410	PJ-3411	PJ-3412

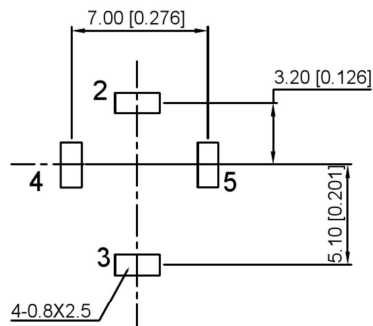

SPECIFICATIONS:

RATING: 12V DC @ 1A

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 50M OHMS MIN: 100V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Brass	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
							DWN		VIEW: 	PART NO.: PJ-341X		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			