

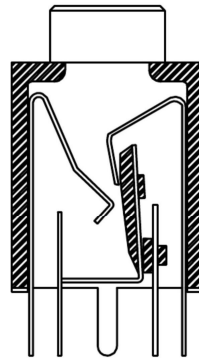
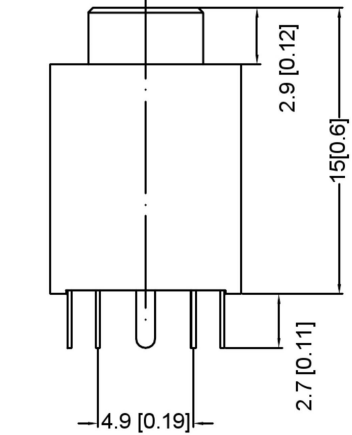
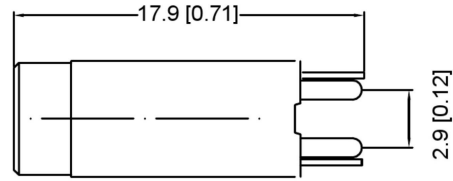


Temperature -20~70C
Rated Load DC30V 0.3A
Contact Resistance <0.03
Insulation Resistance >100M
Withstand Voltage AC500V(50Hz)/min
Actuating Force 2.2~30N
Life 3000N

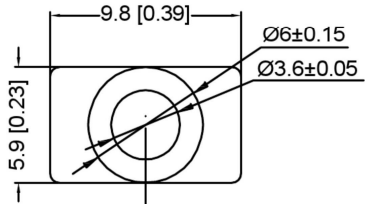

PIN	PJ-359H-X
Schematic	B:Black W:White

	MATERIAL	PLATING
termina 1	Phosphor Bronze	ag
termina 2	Phosphor Bronze	ag
termina 3	Phosphor Bronze	ag
termina 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
terminal 6	Phosphor Bronze	ag
Plastic	PA66	
Plastic	Pom	
base	PBT	

					ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
					L≤ 4	±0.2		DWN		VIEW: 	PART NO.: PJ-359		
					4<L≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
					16<L≤ 63	±0.4		APPD		SIZE: A4			
					L> 63	±0.5							
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION	
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0	