


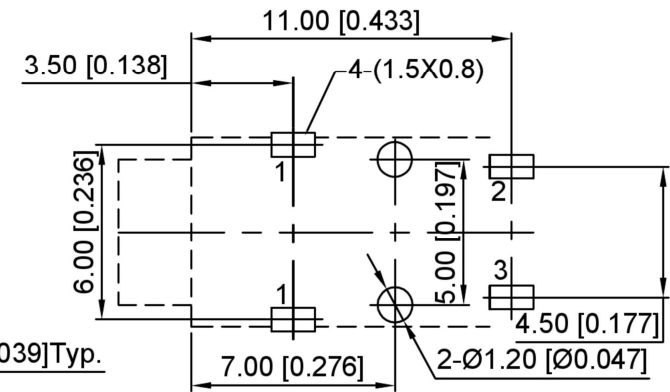
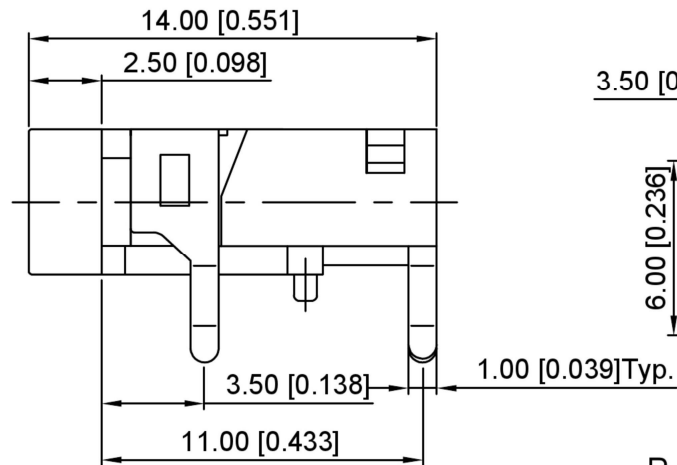


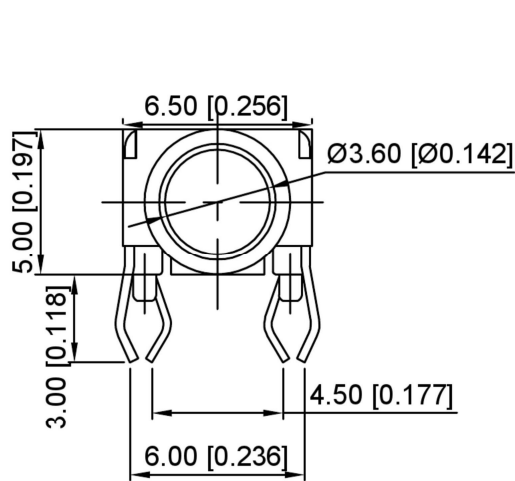

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

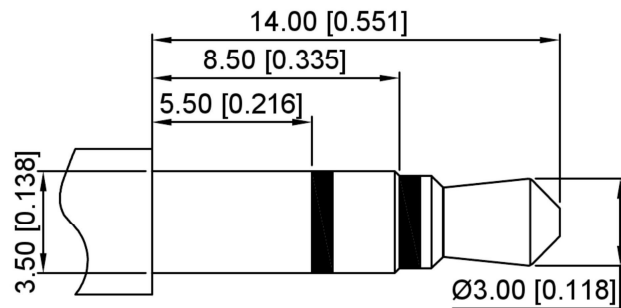


Ø3.50mm 3 POLE PLUG

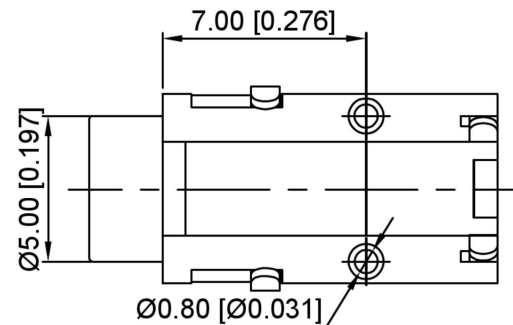


SPECIFICATION

- 1.Rating: DC 30V 0.5A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$;
- 4.Withstand voltage: 500VAC;
- 5.Insertion and extraction force: 3-20N;
- 6.Life test: 5,000 cycles.

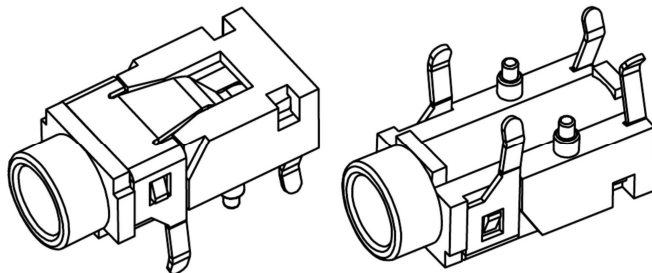

MODEL NO.	PJ-3733
SCHEMATIC	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK			
							DWN		VIEW: 	PART NO.: PJ-3733			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				
				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			WEIGHT			
										SHEET			
										REVISION			
										1/1			
										A0			
www.alpsr.com www.gdxjdz.com www.xbswitch.com													