

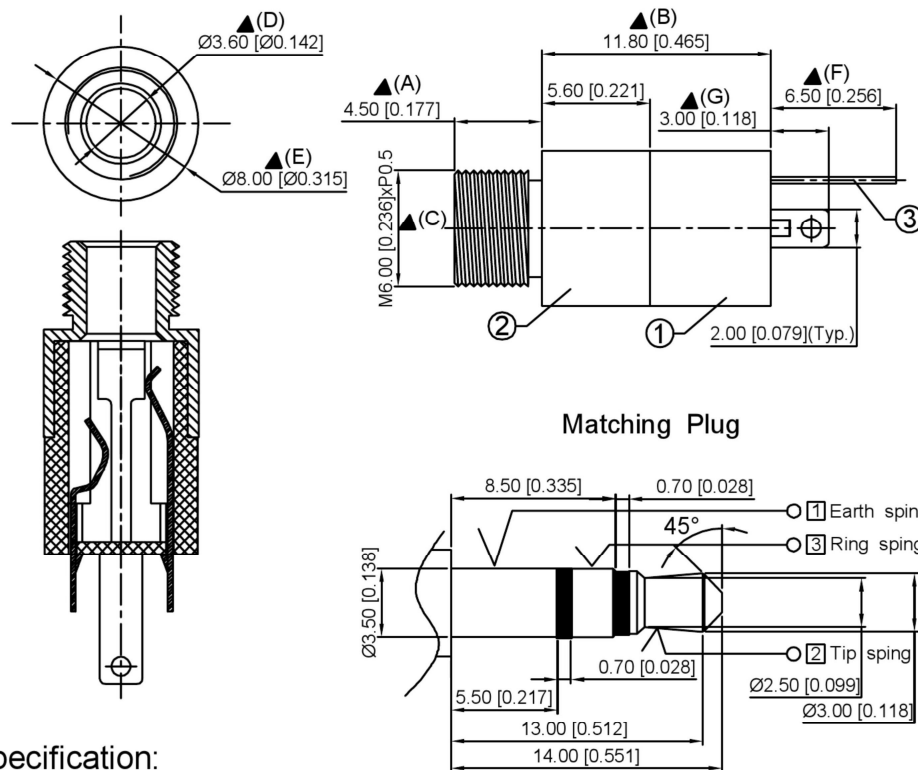
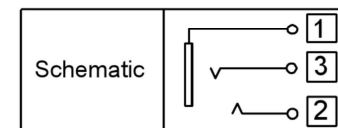


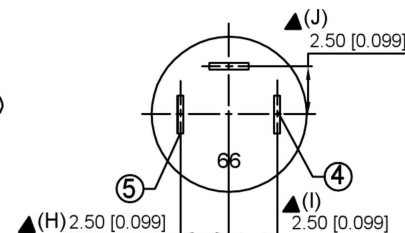



Matching Plug

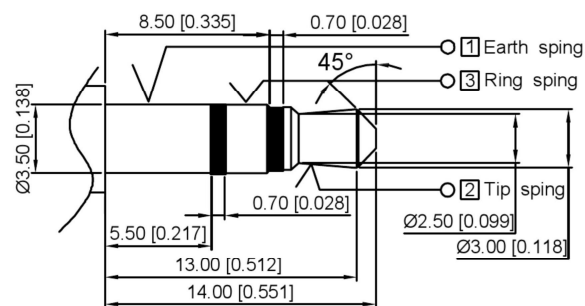

Circuit Diagram □:Terminal No.

Specification:

- 1.Rating: DC 30V 0.5A.
- 2.Contact resistance: ≤30mΩ
After test: ≤50mΩ.
- 3.Insulation resistance: ≥100mΩ (500VDC).
After test: ≥50mΩ.
- 4.Withstanding voltage: 500vac.
- 5.Insertion and extraction force: 3N~30N.
- 6.life test: 5000cycles min.
- 7.Operation temperature range: -20℃ + 70℃.
- 8.Preservative temperature range: -40℃ + 85℃.
- 9.Sign " is importance dimension.

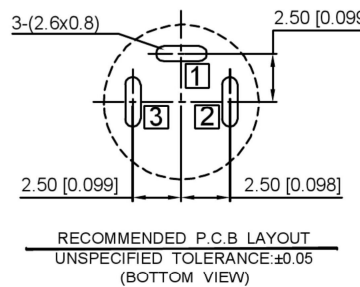

CODE	PLATING
_B	Bushing&Nut (Ni Plated) Terminal (Ag Plated)
_D	Bushing&Nut (Ni Plated) Terminal (Au Plated)
_F	Bushing&Nut (Au Plated) Terminal (Au Plated)

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
1				ANGULAR ±5°
2				L ≤ 4 ±0.2
3				4 < L ≤ 16 ±0.3
4				16 < L ≤ 63 ±0.4
5				L > 63 ±0.5



DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-392W-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0