
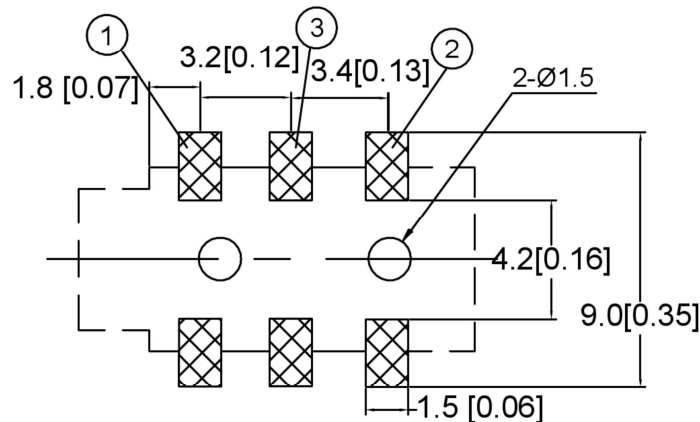
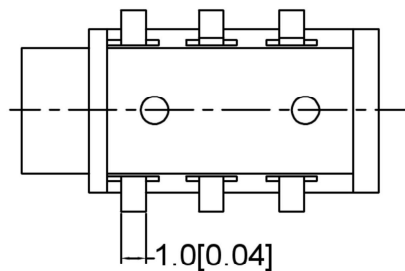
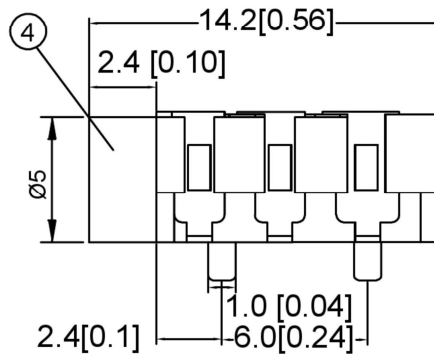


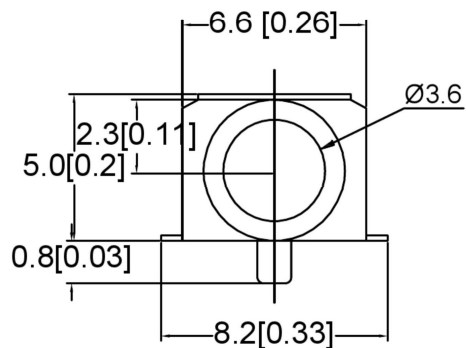

Specifications:
 Voltage rating:30V AC/DC
 Current rating:0.5A AC/DC
 Withstanding voltage:500V AC/minute
 Temperature range:-40°~+55℃
 Insulation resistance:≥100MΩ
 Contact resistance:≤30mΩ
 After environmental testing:≤20mΩ
 Operating Life(Cycles):5000
 Mating Force:3-20N

PIN	PJ-313D-B-SMT
Schematic	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	ag
terminal 2	Phosphor Bronze	ag
terminal 3	Phosphor Bronze	ag
plastic	PA	

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: PJ-308X-SMT				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4<L ≤ 16	±0.3		APPD		SIZE: A4					
				16<L ≤ 63	±0.4									
				L > 63	±0.5									
REVISIONS						UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						WEIGHT	SHEET	REVISION
													1/1	A0