
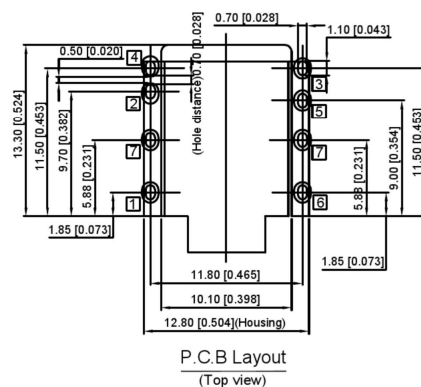

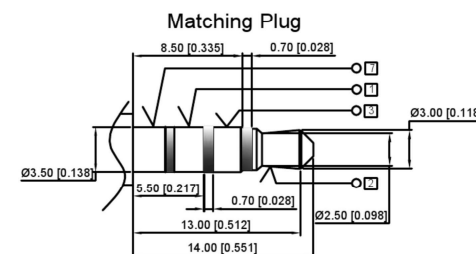


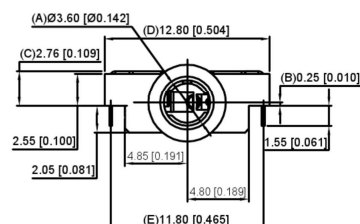


Specification:

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
After life test: $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (500VDC) ;
After life test: $\geq 50\text{M}\Omega$
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3N $\sim$ 25N;
- 6.life test : 5000cycles min ;
- 7.Operation temperature range:-20 $^{\circ}\text{C}$ $\sim$ 70 $^{\circ}\text{C}$
- 8.Preservative temperature range:-40 $^{\circ}\text{C}$ $\sim$ 85 $^{\circ}\text{C}$
- 9.Sign"▲" is importance dimension



Model No.	PJ-3150	PJ-3151	PJ-3152	PJ-3153	PJ-3154
Schematic					

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PA9T	

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
DWN		VIEW: 	PART NO.: PJ-315X		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxdz.com www.xbswitch.com					