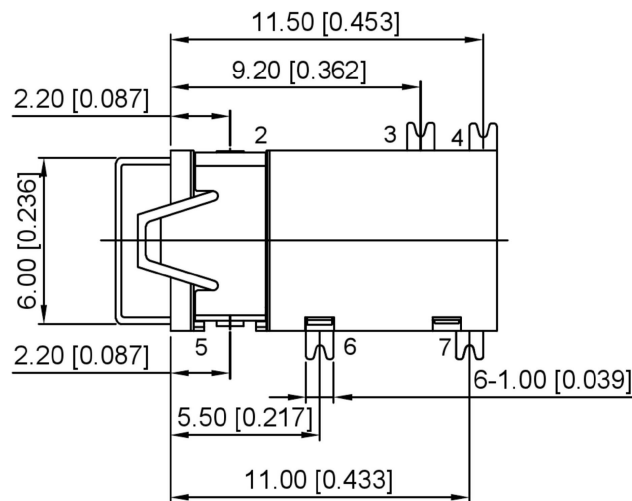
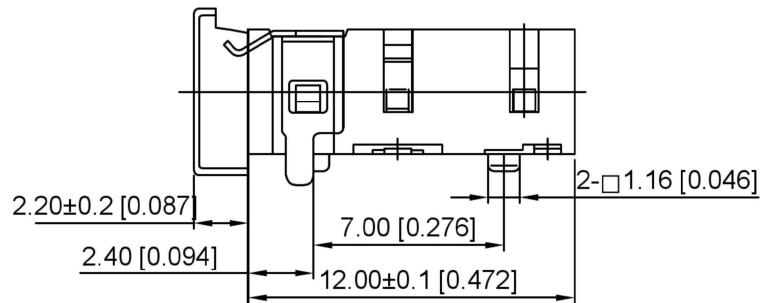
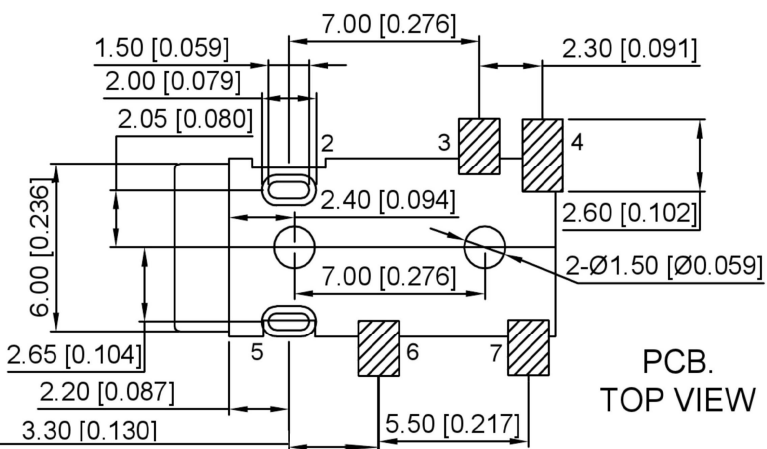
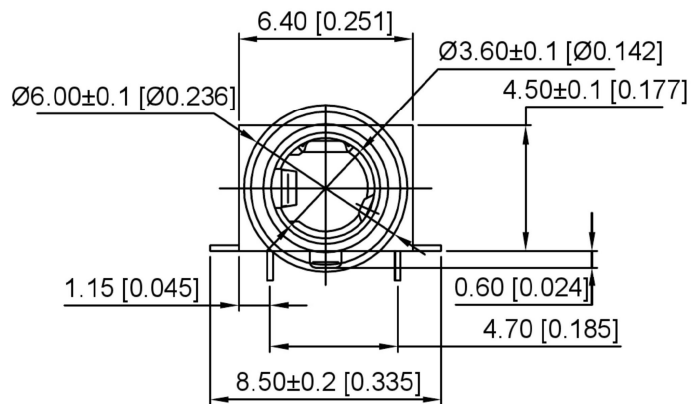
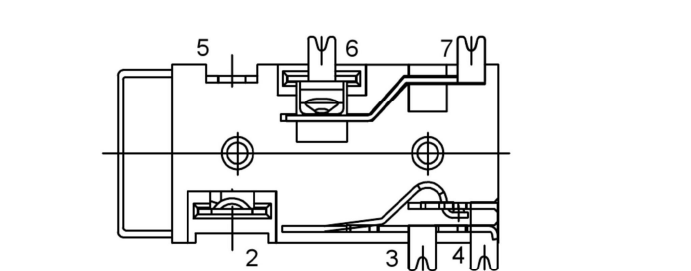


SPECIFICATION

规格

Rating:DC 30V 0.5A

额定值: 30V 0.5A

Contact resistance:≤30mΩ

接触电阻: ≤30mΩ

Insulation resistance:≥100mΩ

绝缘电阻: ≥100mΩ

Inertion and extraction force:3~30N

插拔力:3~30N

Life test:5,000 cycles

寿命: 5,000次循环

PJ-342CB-TX-SMT

G:Gold plating
S:Silver plating

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	Ag
terminal 3	Phosphor Bronze	Ag
terminal 4	Phosphor Bronze	Ag
terminal 5	Phosphor Bronze	Ag
terminal 6	Phosphor Bronze	Ag
terminal 7	Phosphor Bronze	Ag
plastic	High Temp. Thermoplastic	

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK				
							DWN		VIEW: 	PART NO.: PJ-342CB-TX-SMT				
							CHKD		UNIT: mm/in	DWG NO.:				
							APPD		SIZE: A4					
REVISIONS						UNSPECIFIED TOLERANCES						WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD							1/1	A0