



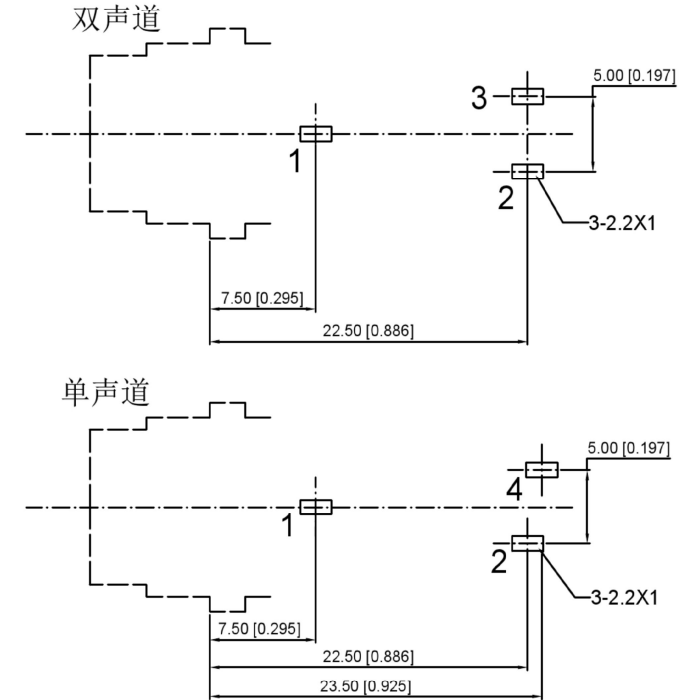


SCHEMATIC

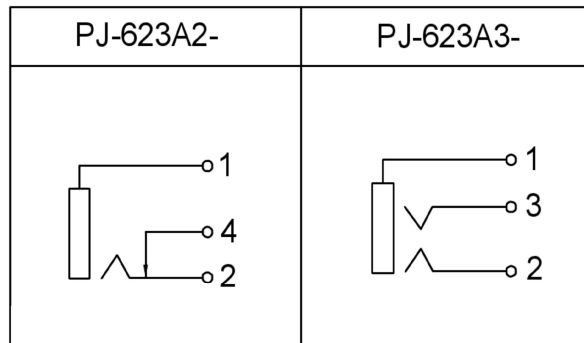

SPECIFICATION

- 1.Rating: DC 30V 0.5A;
- 2.Conract resistance: $\leq 50\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{m}\Omega$ (DC250V);
- 4.Withstand Voltage: 500VAC;
- 5.Insertion and extraction force:3-25N;
- 6.life test: 5,000 cycles.

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PBT	

							DSND		SCALE: N/A	MODEL TYPE: 6.5 PHONE JACK		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: PJ-623AX-X		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16	±0.3		APPD		SIZE: A4			
				16 < L ≤ 63	±0.4							
				L > 63	±0.5							
				DATE	REVISED	APPROVED						
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.qdxjdz.com www.xbsswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT			
									SHEET			
									REVISION			
									1/1			
									A0			



DONG GUAN XI BANG ELECTRONIC CO., LTD