


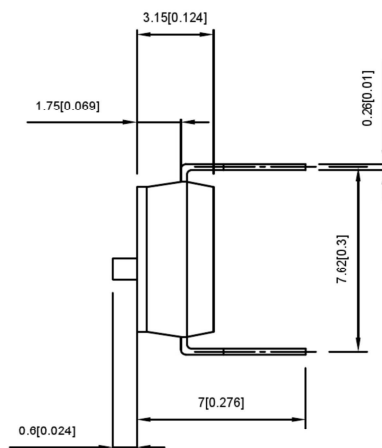
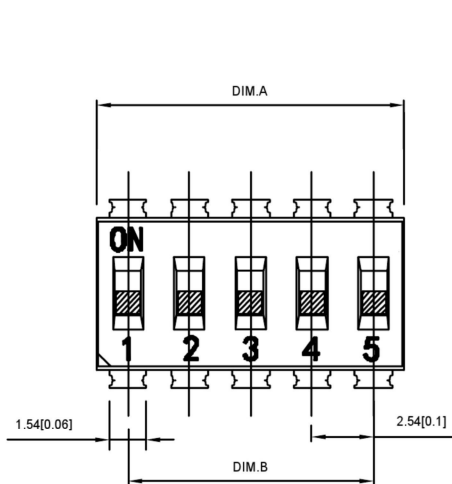




Projection(P)

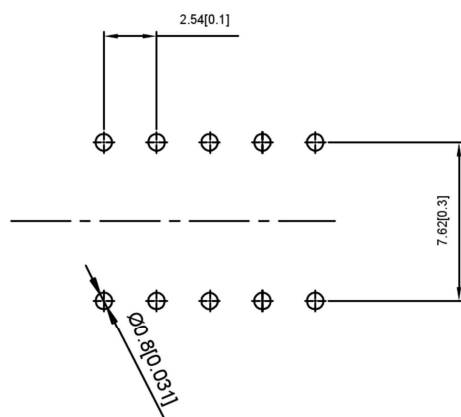

Short(S)

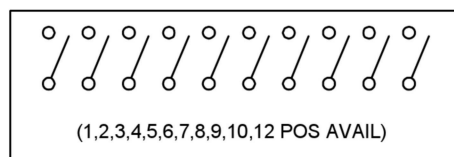

PART NO.	N0.OFPOS	DIM.A	DIM.B	Projection(P)	Short(S)
DSIC01LH	1	2.54		DSIC01LH-P	DSIC01LH-S
DSIC02LH	2	5.08	2.54	DSIC02LH-P	DSIC02LH-S
DSIC03LH	3	7.62	5.08	DSIC03LH-P	DSIC03LH-S
DSIC04LH	4	10.16	7.62	DSIC04LH-P	DSIC04LH-S
DSIC05LH	5	12.7	10.16	DSIC05LH-P	DSIC05LH-S
DSIC06LH	6	15.24	12.7	DSIC06LH-P	DSIC06LH-S
DSIC07LH	7	17.78	15.24	DSIC07LH-P	DSIC07LH-S
DSIC08LH	8	20.32	17.78	DSIC08LH-P	DSIC08LH-S
DSIC09LH	9	22.86	20.32	DSIC09LH-P	DSIC09LH-S
DSIC10LH	10	25.4	22.86	DSIC10LH-P	DSIC10LH-S
DSIC12LH	12	30.48	27.94	DSIC12LH-P	DSIC12LH-S

SPECIFICATION

Contact Rating:	25mA,24V DC
Contact Resistance:	50mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	500V AC/1minute
Operating Force:	1000gf max
Travel:	1.0mm
Operating Life:	3000cycles
Operating Temp:	-20 °C~+70 °C
Storage Temp:	-30 °C~+80 °C

4	Terminal		Copper Alloy	T: Tin plated G: Plating Gold
3	Base	1	Pa9t	white
2	Keystake	1	Pa66	white
1	Cover	1	Pa66	Black
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	DIP SWITCH
CHKD		UNIT: mm/in	PART NO.: DSICXXLH-X
APPD		SIZE: A4	DWG NO.:
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET
			REVISI
			1/1
			A0