
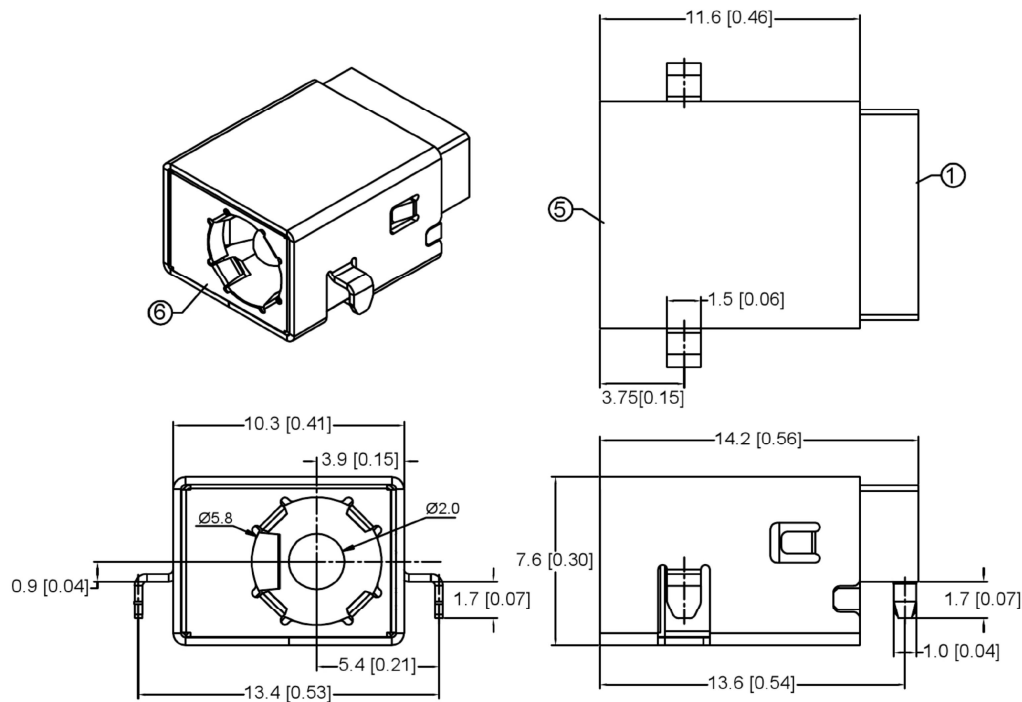
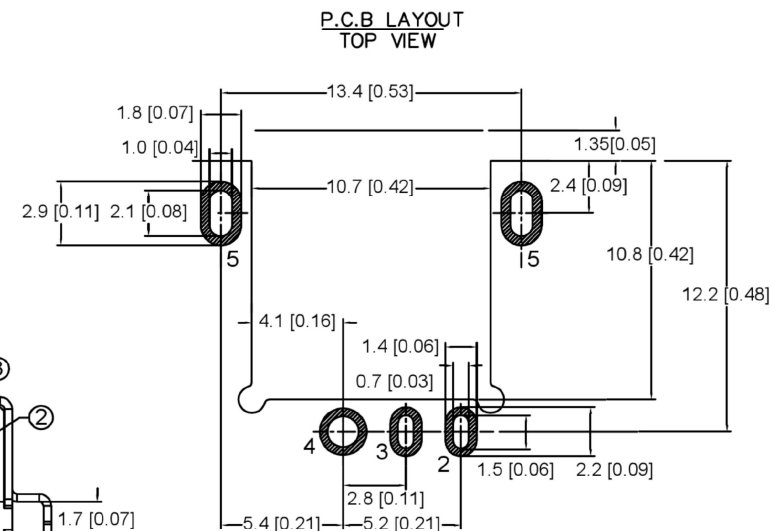
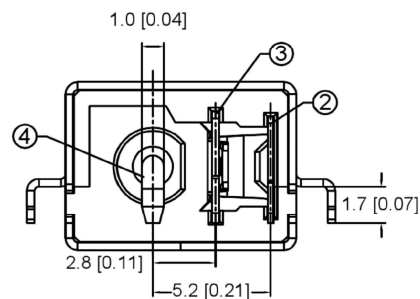


RECOMMENDED PLUG

SPECIFICATION

1. Rating :DC 20V 5.5A;
2. Contact resistance: <0.03Ω;
3. Insulation resistance: 2100MΩ (DC250V);
4. Withstand voltage: 500VAC
5. Insertion and extraction



SCHEMATIC	
Model	DC-C033D-5.5A
Center Pin	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
center pin	Brass	tin
coat	Sus	
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Brass	tin
plastic	Pa9t	

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.: DC-C033D-5.5A-2.0
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	
				L > 63	±0.5					
REVISIONS				UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			
www.alpsr.com www.gdxjdz.com www.xbswitch.com				DATE	REVISED	APPROVED	WEIGHT	SHEET	REVISION	
								1/1	A0	