

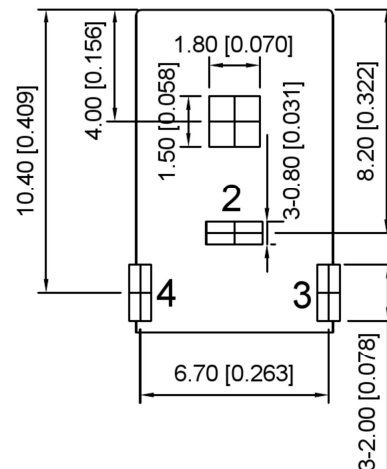




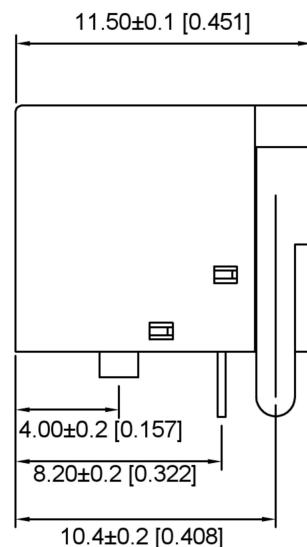

P.C.B LAYOUT TOP VIEW

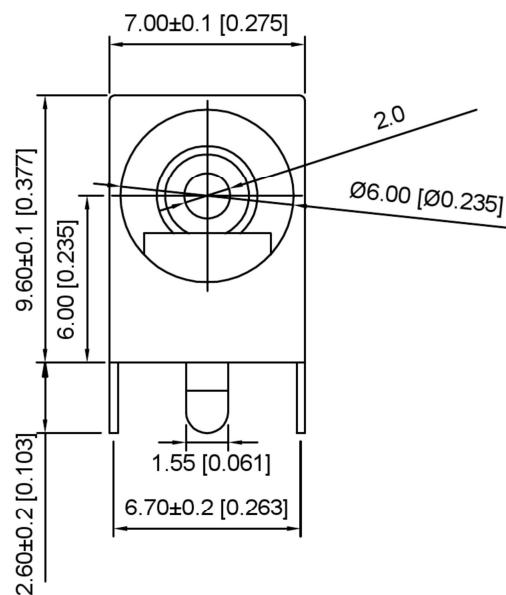

Specifications:

规格:

- 1.Voltage rating:12VAC/DC
额定电压: 12V AC/DC
- 2.Current rating:3A AC/DC
额定电流: 3A AC/DC
- 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
- 4.Temperature range: -30 °C-+70 °C
温度范围: -30 °C-+70 °C
- 5.Insulation resistance:100MΩMIN
绝缘电阻: ≥100MΩ
- 6.Contact resistance:30mΩMax
接触电阻: ≥30mΩ
7. Life:5000 cycles
寿命: 5000次
8. Insertion and extrscion force : 3-20N
插拔力: 3-20N

SCHEMATIC	
Model	DC-0360
Center Pin	Ø1.65 mm
Center Pin	Ø2.0 mm
Center Pin	Ø2.5 mm

5	Center pin	1	Brass	-	Tin
4	plain film	1	Brass	T=0.30	Silver
3	illustration	1	Brass	T=0.30	Silver
2	Contact	1	Brass	T=0.30	Silver
1	Base	1	PBT	Black	-
ITEN	Name	Number	Material	Color	PLATING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN		VIEW:	PART NO.: DC-0360-2.5
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
			WEIGHT
			SHEET
			REVISION
			1/1
			A0