
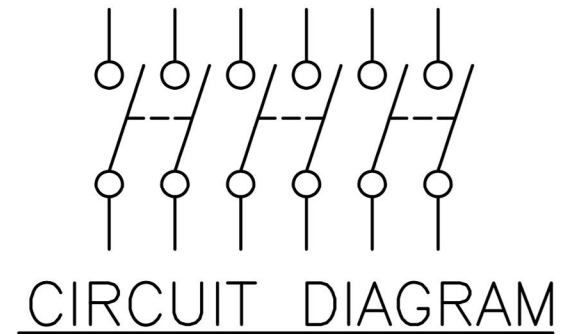


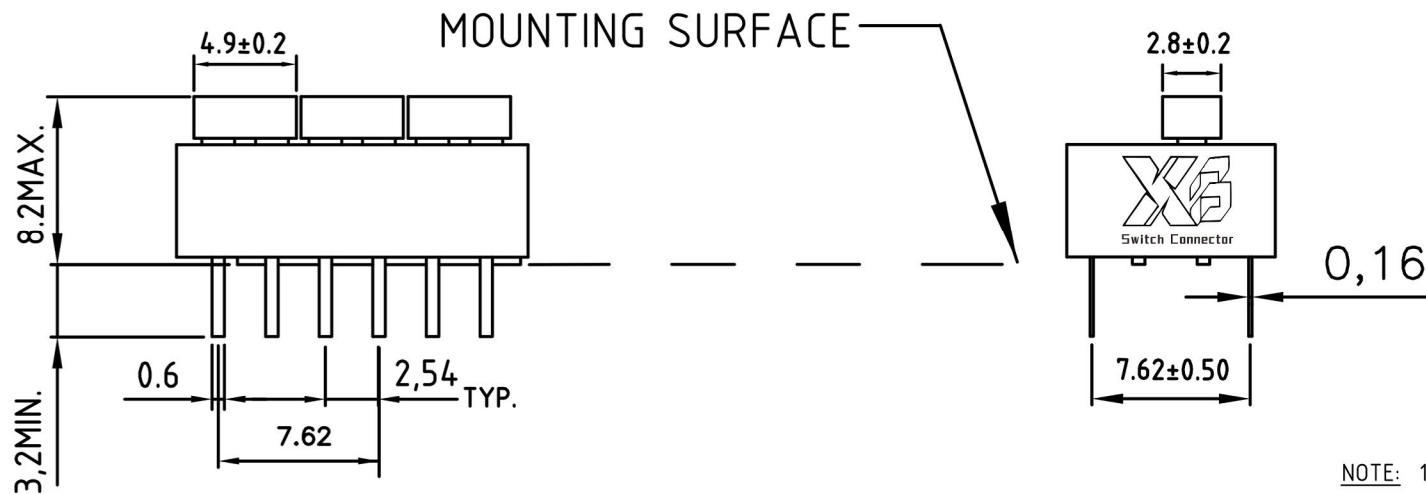

NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. GENERAL TOLERANCE: $\pm 0.2\text{mm}$

3. MATERIAL: Δ BASE:UL94V-0 PBT Thermoplastic(Black)
 Δ COVER:UL94V-0 PBT Thermoplastic(Red.Black.Blue)
 Δ ACTUATORS:UL94V-0 PBT Thermoplastic(White)
 Δ CONTACT PLATING:Gold plating over nickel
 Δ PITTING MATERIAL:Epoxy

Δ ELECTRICAL

Electrical:2000 operations per switch-
 24 VDC,25mA.

Non-Switching Rating:100mA,50VDC.

Switching Rating:25mA,24VDC.

Contact Resistance:50m Ω max. at initial.

Δ MECHANICAL



Mechanical life: 2000 operations per swith.

Stroke: 2.0mm.

Operation Temp: -25°C to 70°C

Storage Temp: -40°C to 85°C .

ON POSMON

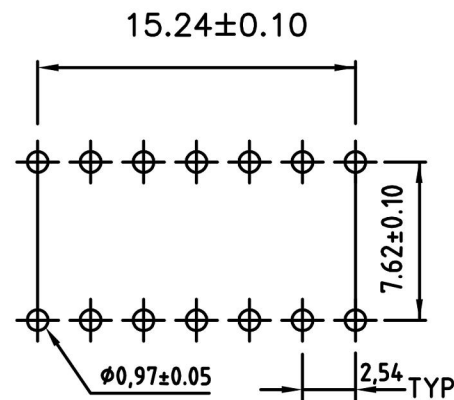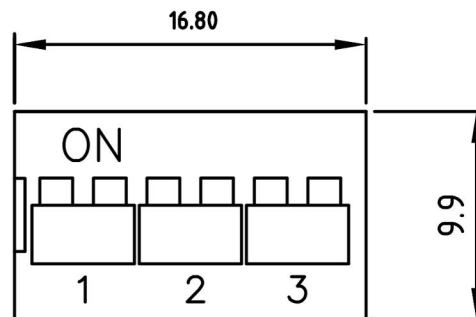

P.C.B. LAYOUT

				ANGULAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.adxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	DIP SWITCH
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	DS-XX-X-X
			DWG NO.:
			XB-DS-06XBSL
		WEIGHT	SHEET
			1/1
		REVISIC	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD