
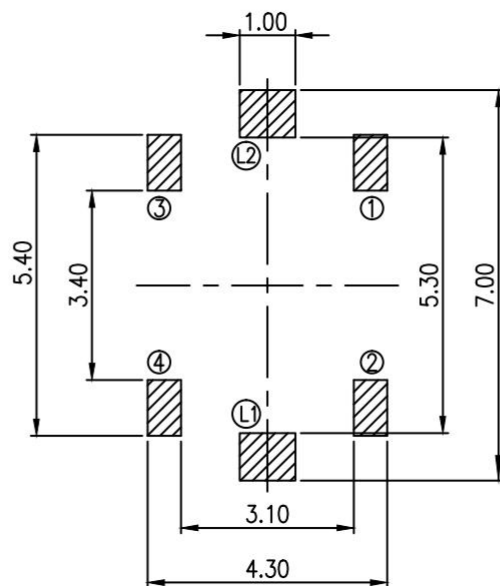
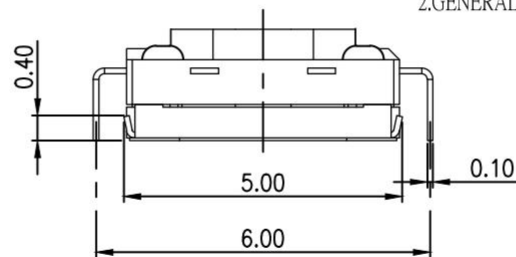


CAD FILE:



NOTE:

1.ALL DIMENSIONS ARE IN MILLIMETERS.


2.GENERAL TOLERANCES $\pm 0.20\text{mm}$.

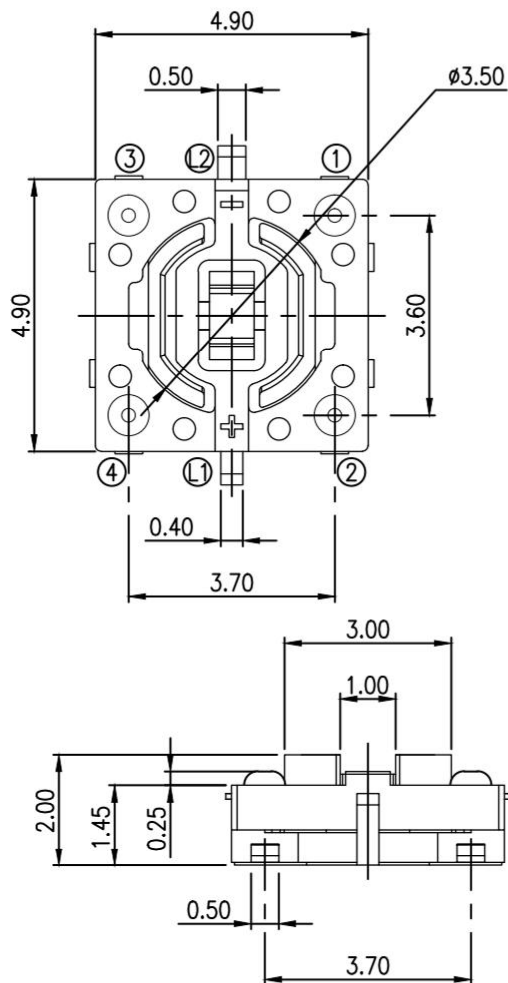

P.C.B. LAYOUT

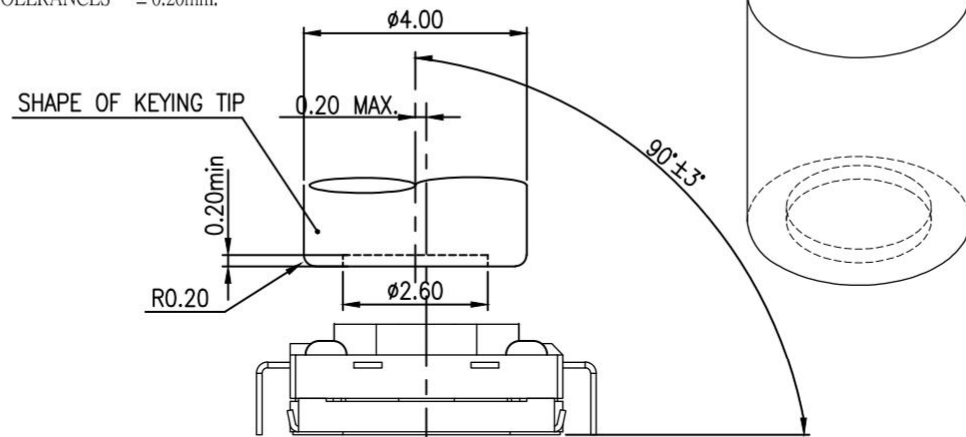

CIRCUIT

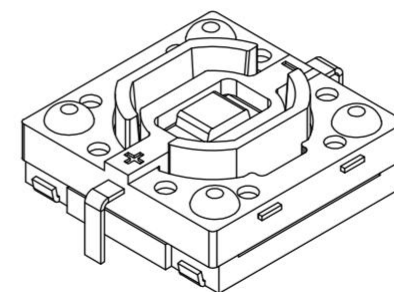

SPECIFICATIONS:

- 1.Rating :50mA, DC 12V
- 2.Contact Resistance :100mΩ Max
- 3.Insulation Resistance :DC 500V 1M $\pm 5s$ 100 MΩ
- 4.Dielectric Strength :AC 250V 1M $\pm 5s$
- 5.Operating Force(OF):160 ± 50 gf.
- 6.Life: 1,000,000 CYCLES
- 7.Operating Temperature Range:-40 ° ~ +85 °C
Storage Temperature Range:-40 ° ~ +85 °C

注：“*”表示关键尺寸(4个)。

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm	A	11-Apr-2019	初 版		CHEN ZENQ
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag PLATED	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-LED-02	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-LED-02			SCALE: 5:1	DWN.	CHEN ZENQ 11-Apr-2019
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	PANG JUN	11-Apr-2019
1	KNOB	PPA	1	BLACK				APPD.	WU LIANG	11-Apr-2019
NO.	PARTS	MATERIALS	Q'TY	FINISH						