










CAD FILE:

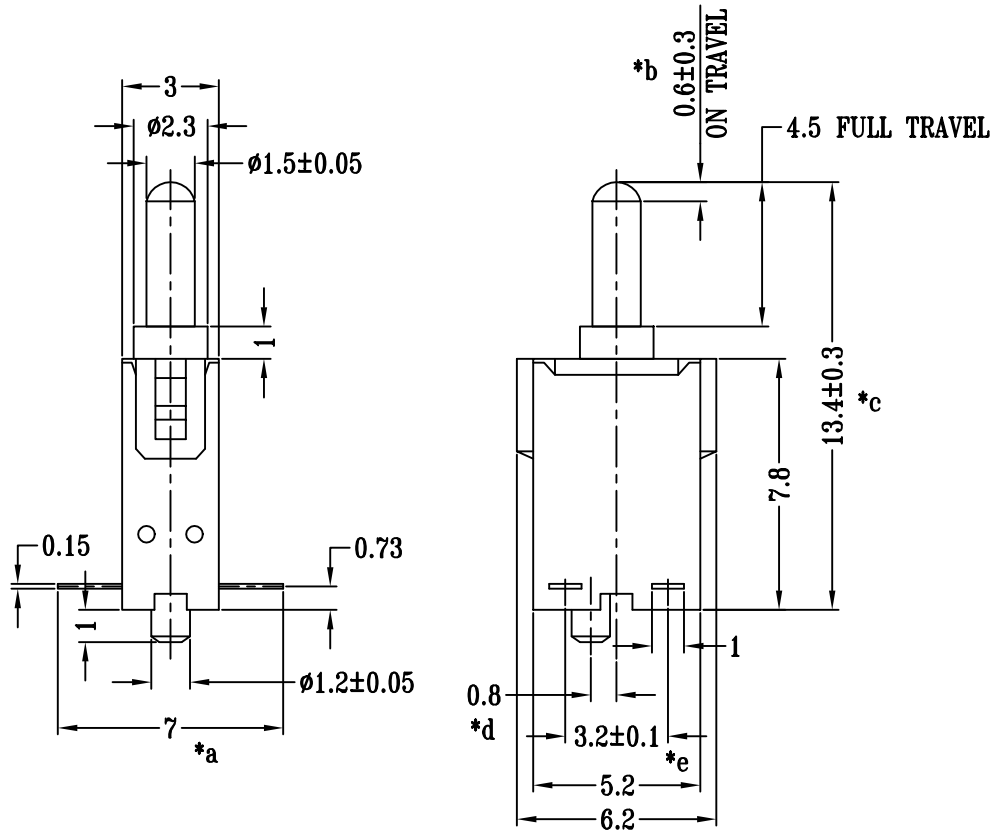

SCHEMATIC

- 1、开关动作力：100±30gf.cm
- 2、回返力：30gf.cm Min
- 3、额定值：DC30V 0.1A
- 4、接触电阻：200mΩ Max
- 5、绝缘电阻：≥100MΩ (MinDC250V)
- 6、耐压：250V AC(50HZ或60HZ)/1min
- 7、机械寿命：50000 Min

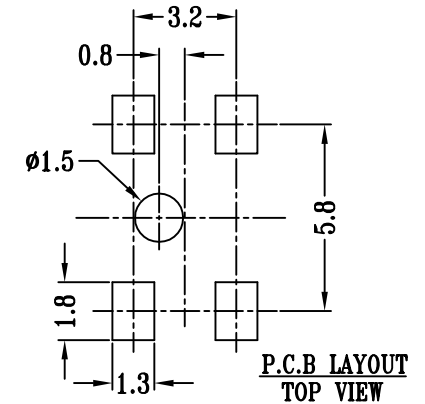

注：“*”表示关键尺寸（5个）

NO.	PARTS	MATERIALS	QTY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8									
7									
6	TERMINAL	BRASS	1	Ag PLATED	WITHIN 1.5mm : ±0.1mm	A	2020-05-23	初版	曾鹏
5	CASE	PA66	1	BLACK	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	SPRING	SUS	1	NATURAL	TITLE : PUSH SWITCH			UNIT : mm	DRWG NO.: LT-DR-TC0036T-00
3	CONTACT	PBS STRIP	1	Ag CLAD	MODEL: XB-TM-W-05D			SCALE: 5:1	DWN. 刘锦泳 2020-05-23
2	BUTTON	PA66	1	YELLOW	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D 邓容辉	2020-05-23
1	COVER	PA66	1	BLACK				APPD.	2020-05-23