

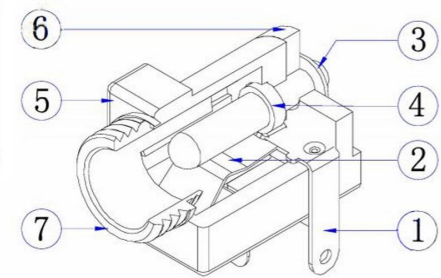


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11





PIN	φ 1.65	φ 2.0	φ 2.35	φ 2.5
APPD				


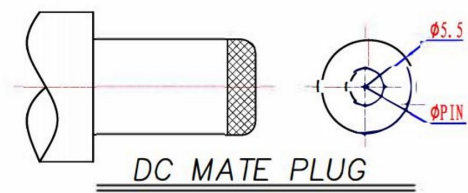


- 技术要求
- 1、插入力: 2.94~29.4N (0.3~3.0kgf)
 - 2、拔出力: 2.94~29.4N (0.3~3.0kgf)
 - 3、接触电阻: ≤50mΩ
 - 4、绝缘电阻: >100MΩ DC 500V
 - 5、耐电压: AC 500V 1min无飞弧及击穿
 - 6、寿命: 5000 10~20次/min
 - 7、额定负载: DC 12V 1A
 - 8、适用温度范围: -25~85° C
 - 9、推荐使用插头:

螺帽

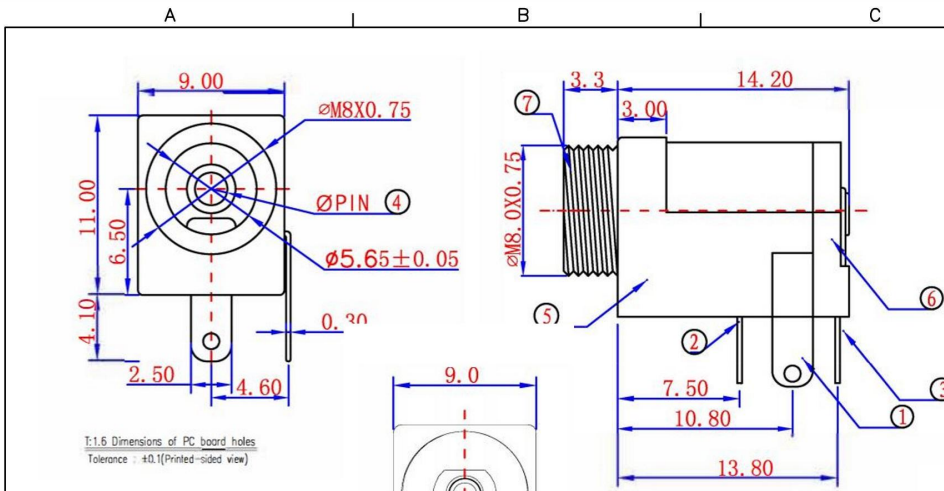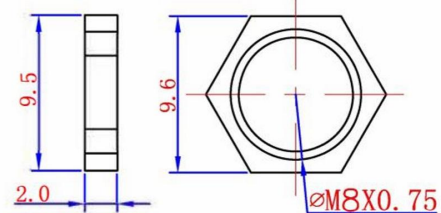

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-sided view)

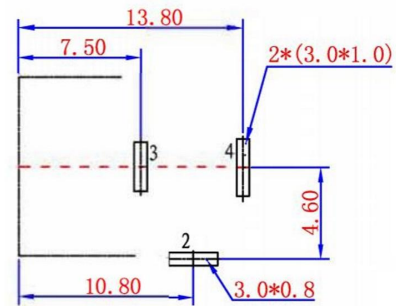

3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	GP TP IP	DESIGN:	DATE:	TITLE:
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		CHECKED:	DATE:	DC POWER JACK CONNECTOR
X. ±0.50		APPROVED:	DATE:	
X.x ±0.30				REV.: B SCALE: 1:1 UNIT: mm
X.xx ±0.20				SIZE: A4 SHEET: 1/1
X.xxx ±0.10				
ANGULAR ±3°				

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.