












CAD FILE:



SCHEMATIC



D SC:2:1

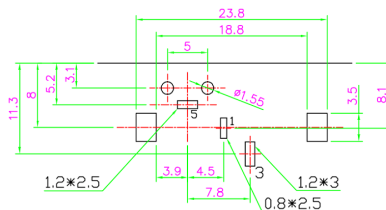

PCB HOLES(THE PATTERN SIDS) t=1.2/1.6mm
NOTE:GENERAL TOLERANCE:±0.1mm

ELECTRICAL
RATING:DC 20V 7A:
CONTACT RESISTANCE:30mΩ MAX
INSULATION RESISTANCE: 100 MΩ MIN.
DIELECTRIC WITHSTAND VOLTAGE: 500V AC
INSERTION FORCE:3-35N.
DURABILITY TEST: 5,000 CYCLES.
TEMPERATURE RANGE: -25°C TO +85°C
PACKAGING: TAPE&REEL
MATERIALS & PLATING: SEE THE TABLE BELOW.

注：“*”表示关键尺寸(4个).

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED						
						WITHIN 1.5mm : ±0.1mm	OVER 1.5mm : ±0.2mm	A	2012-9-25	初版	ZENQ. CHEN
8											
7											
6											
5											
4	CONTACT	SUS	1	Ag CLAD							
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED							
2	COVER	STEEL STRIP	1	Ni PLATED							
1	KNOB	PPA	1	BLACK							
					TITLE : DC power socket				UNIT : mm	DRWG NO.: XB-DC-0115	
					MODEI:				SCALE: 5:1	DWN.	JUN. YANG
										2012-9-25	
										CHK'D	DONG. PANG
										APPD.	ZENQ. CHEN
											2012-9-25