


REVISIONS			
REV.LTR	DESCRIPTION	SIGN	DATE



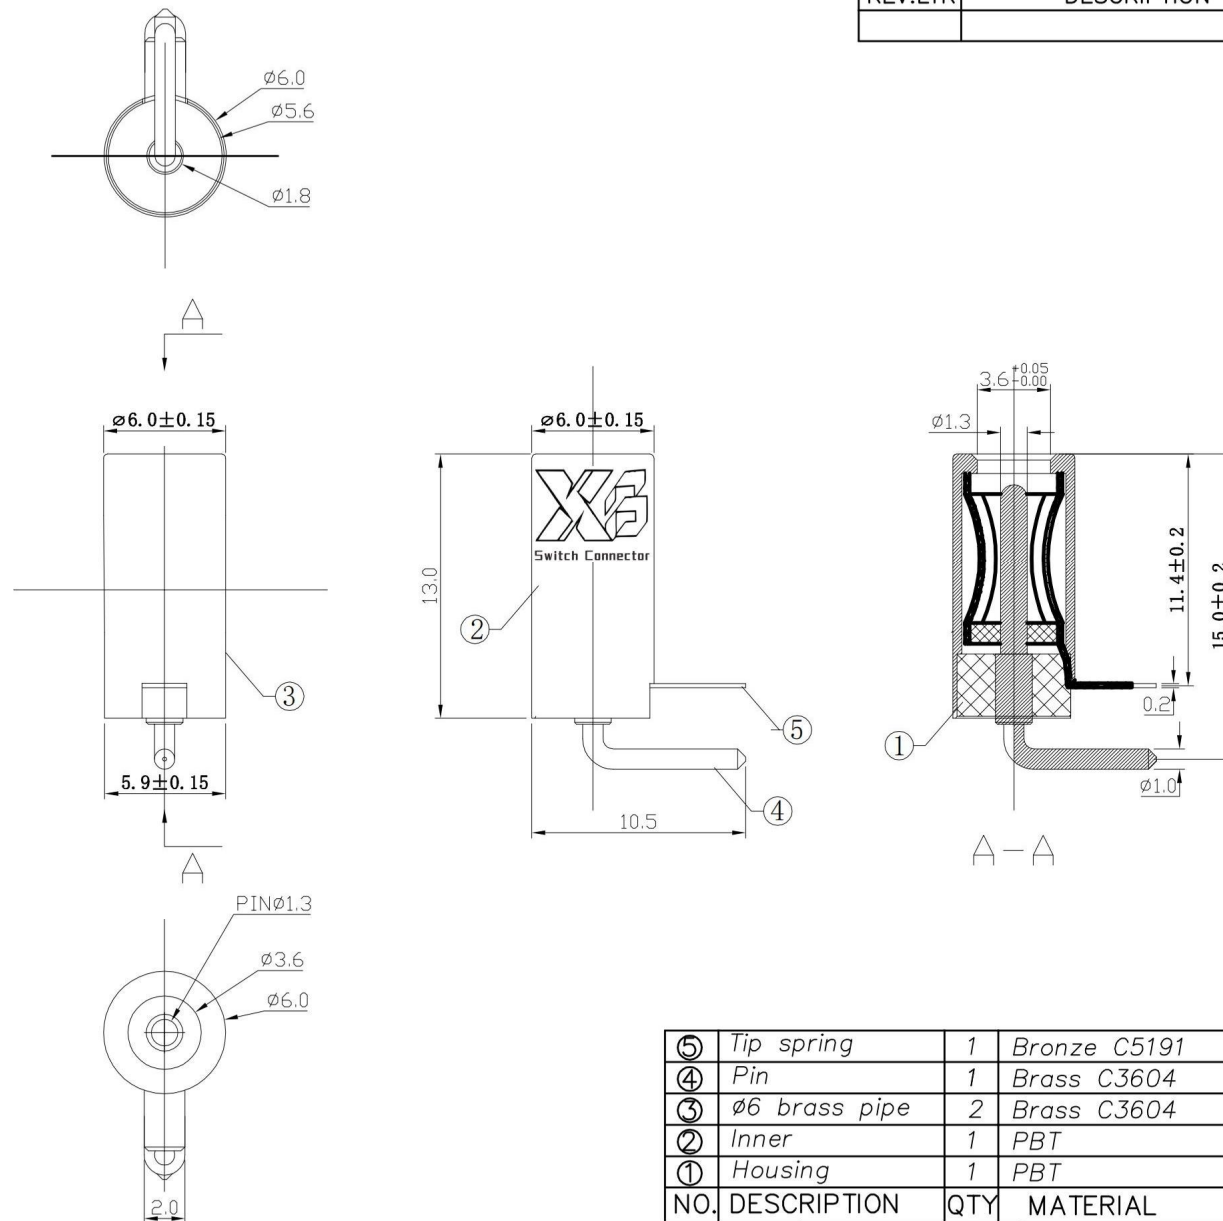


SPECIFICATION

- 1.Rating : DC 24V 3A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 2-20N;
- 6.life test: 5,000 cycles.

⑤	Tip spring	1	Bronze C5191		Sn-Plating
④	Pin	1	Brass C3604		Sn-Plating
③	ø6 brass pipe	2	Brass C3604		Sn-Plating
②	Inner	1	PBT		Black
①	Housing	1	PBT		Black
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING
UNIT:MM		TYPE:		MODEL NO:	PAPER NO: A4
		DC POWER JACK		XB-DC-083A (ø3.6)	PAGE 1 OF 1
DESIGNER BY:		CHECK BY:		TOLERANCE	ANGLES
APPROVED BY:				±0.3	±2°
				SCALE	VER
				FULL	2



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

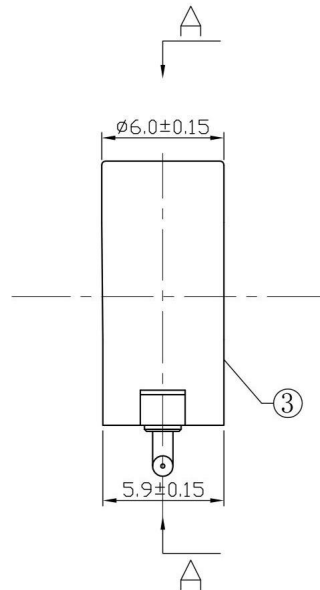


XB-DC-083A

SPECIFICATION

1. Rating : DC 24V 3A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 2-20N;
6. life test: 5,000 cycles.

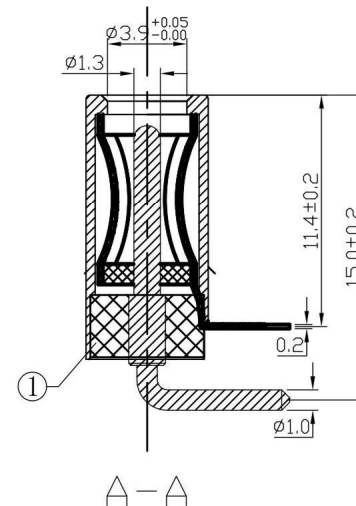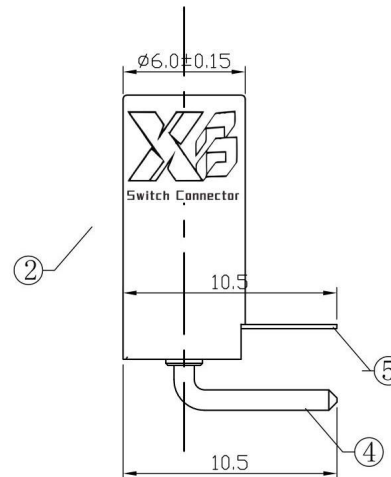

⑤	Tip spring	1	Bronze C5191		Sn-Plating		
④	Pin	1	Brass C3604		Sn-Plating		
③	ø6 brass pipe	2	Brass C3604		Sn-Plating		
②	Inner	1	PBT		Black		
①	Housing	1	PBT		Black		
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING		
UNIT: MM		TYPE: DC POWER JACK	MODEL NO: XB-DC-083B (孔径3.9)	PAPER NO: A4		PAGE 1 OF 1	
				TOLERANCE	ANGLES	SCALE	VER
				±0.3	±2°	FULL	2
DESIGNER BY:			 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				
CHECK BY:							
APPROVED BY:							