

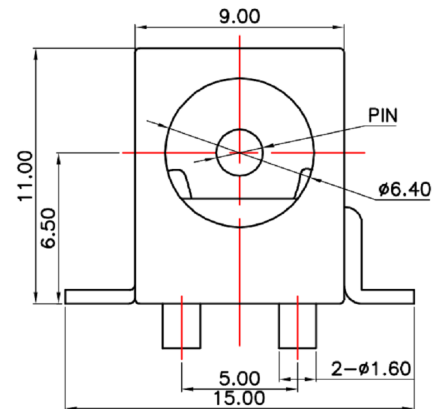





CAD FILE:

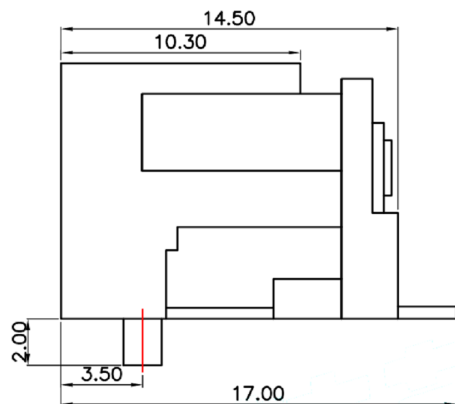

P.C.B LAYOUT(Copper-side view)

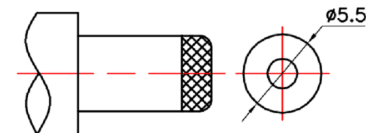

DC MATE PLUG

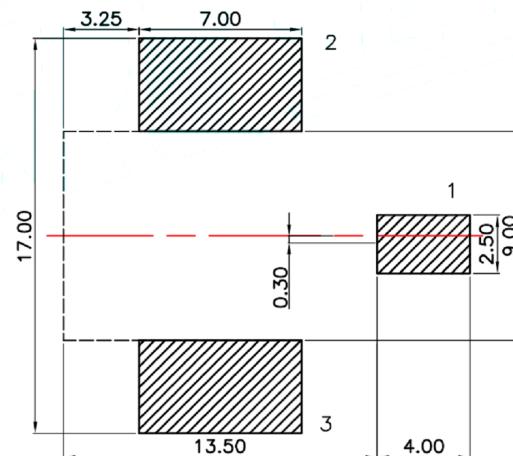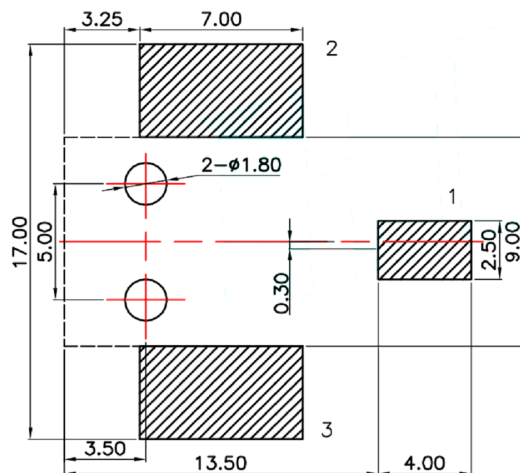

Model No.	1	2
PIN	ø2.0	ø2.5

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ.CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC JACK			UNIT : mm	DRWG NO.: XB-DC-088N
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	XIB 东莞市溪榜电子有限公司			CHK'D DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK	Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.			APPD. ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					