

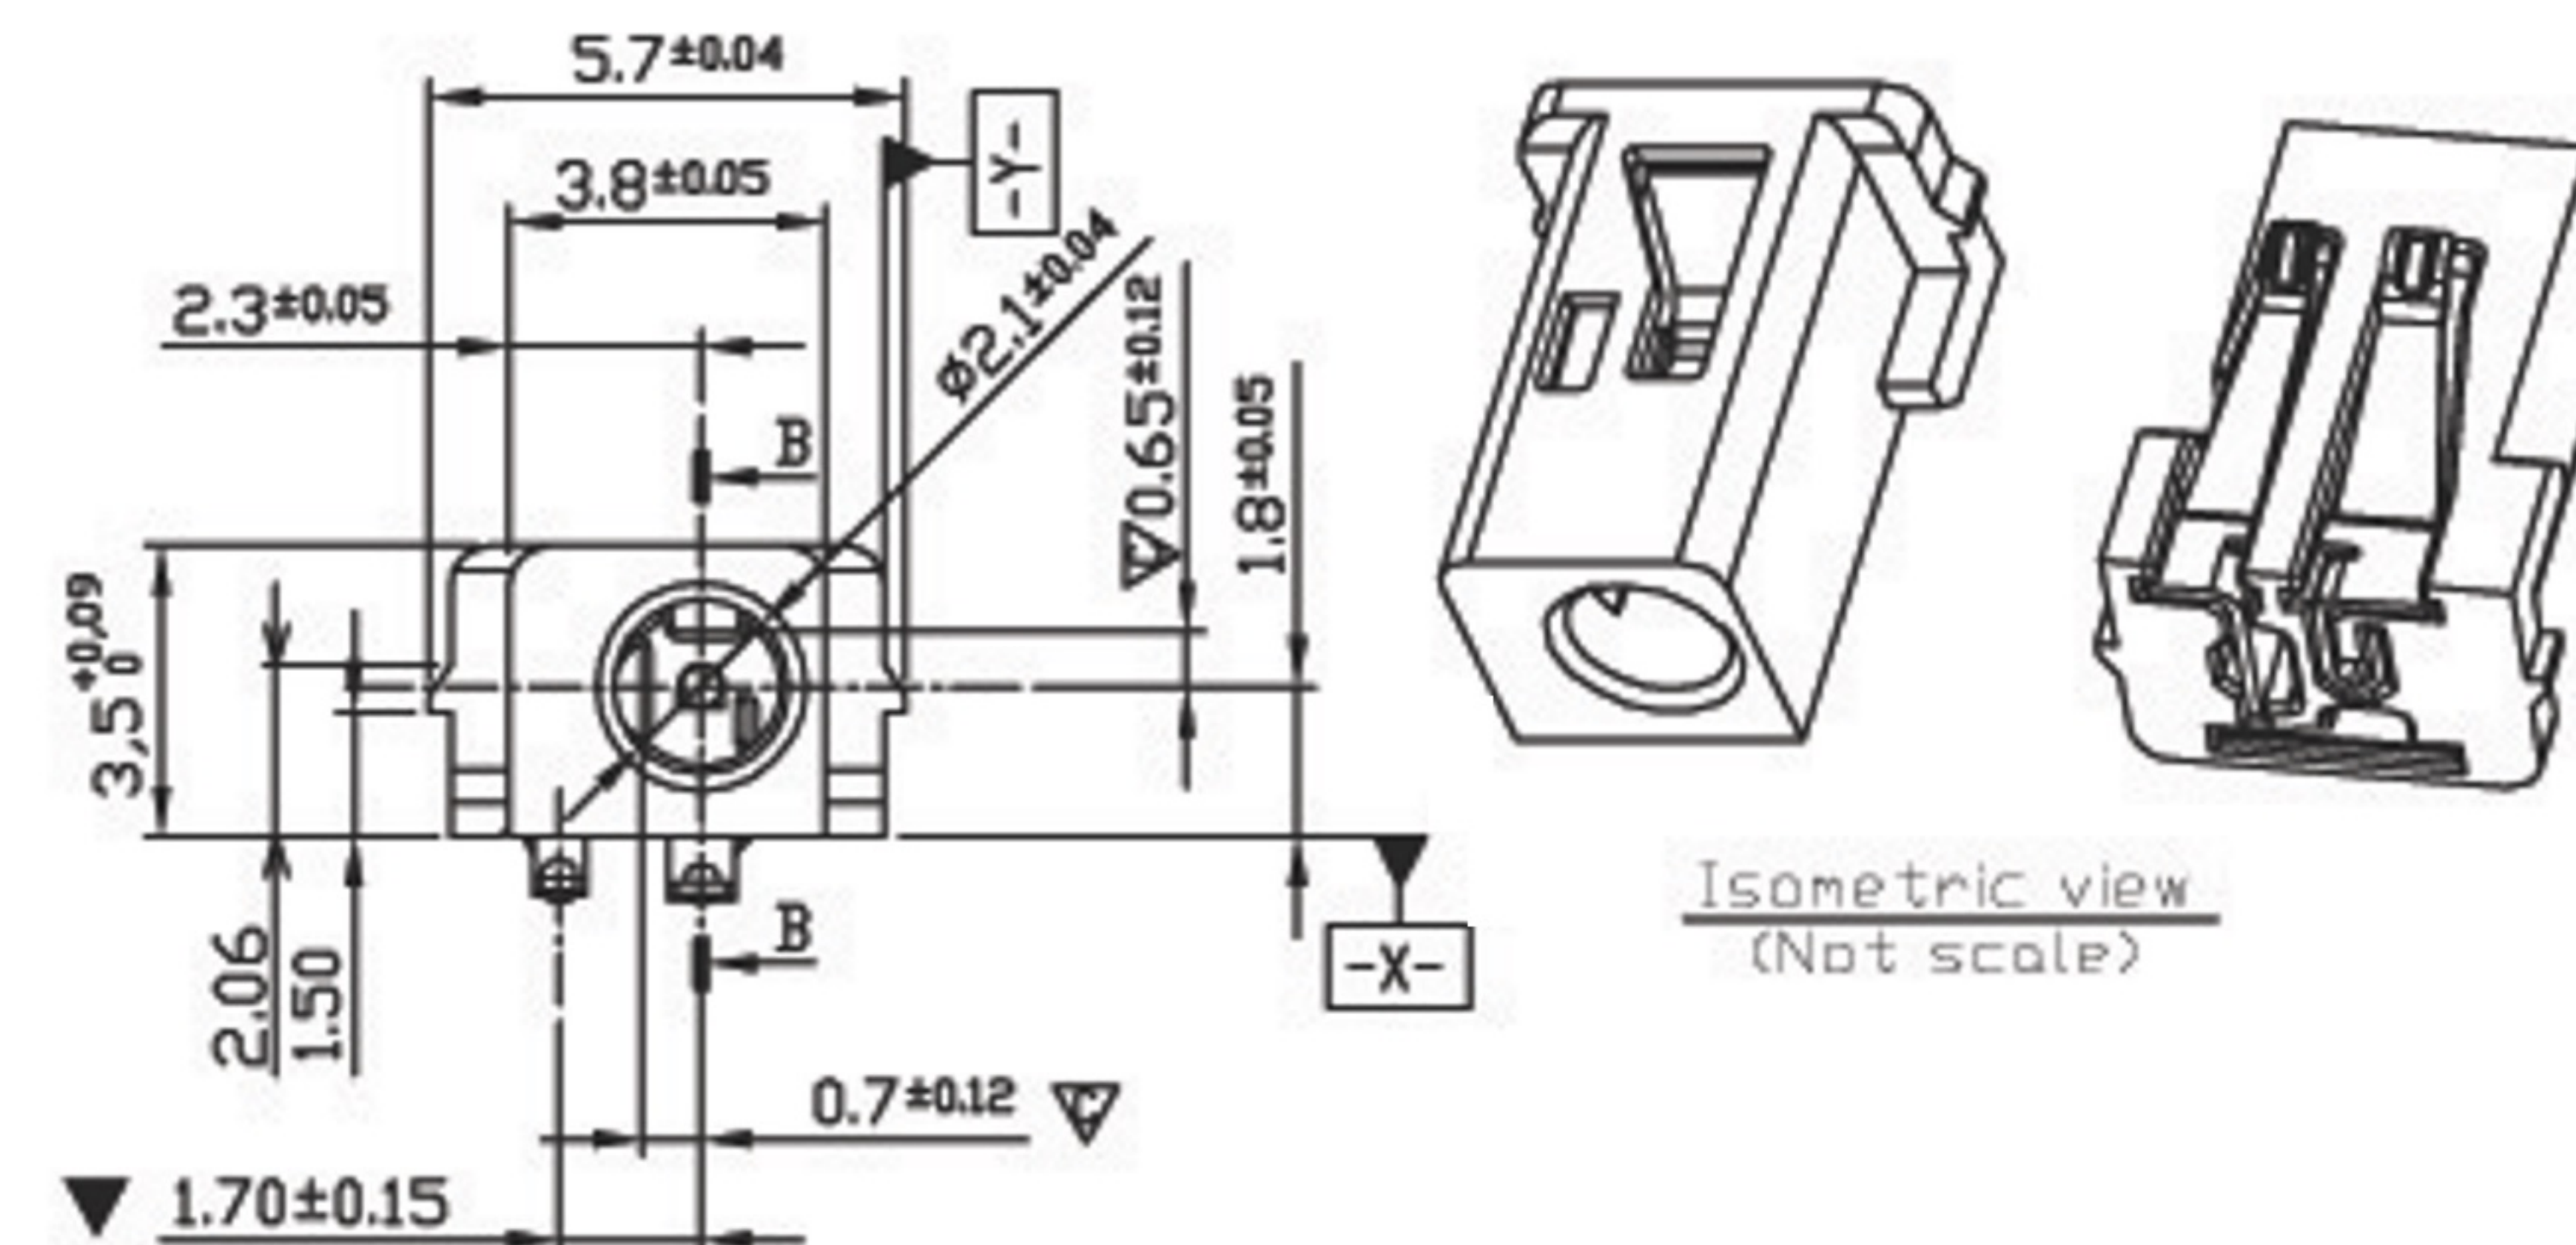
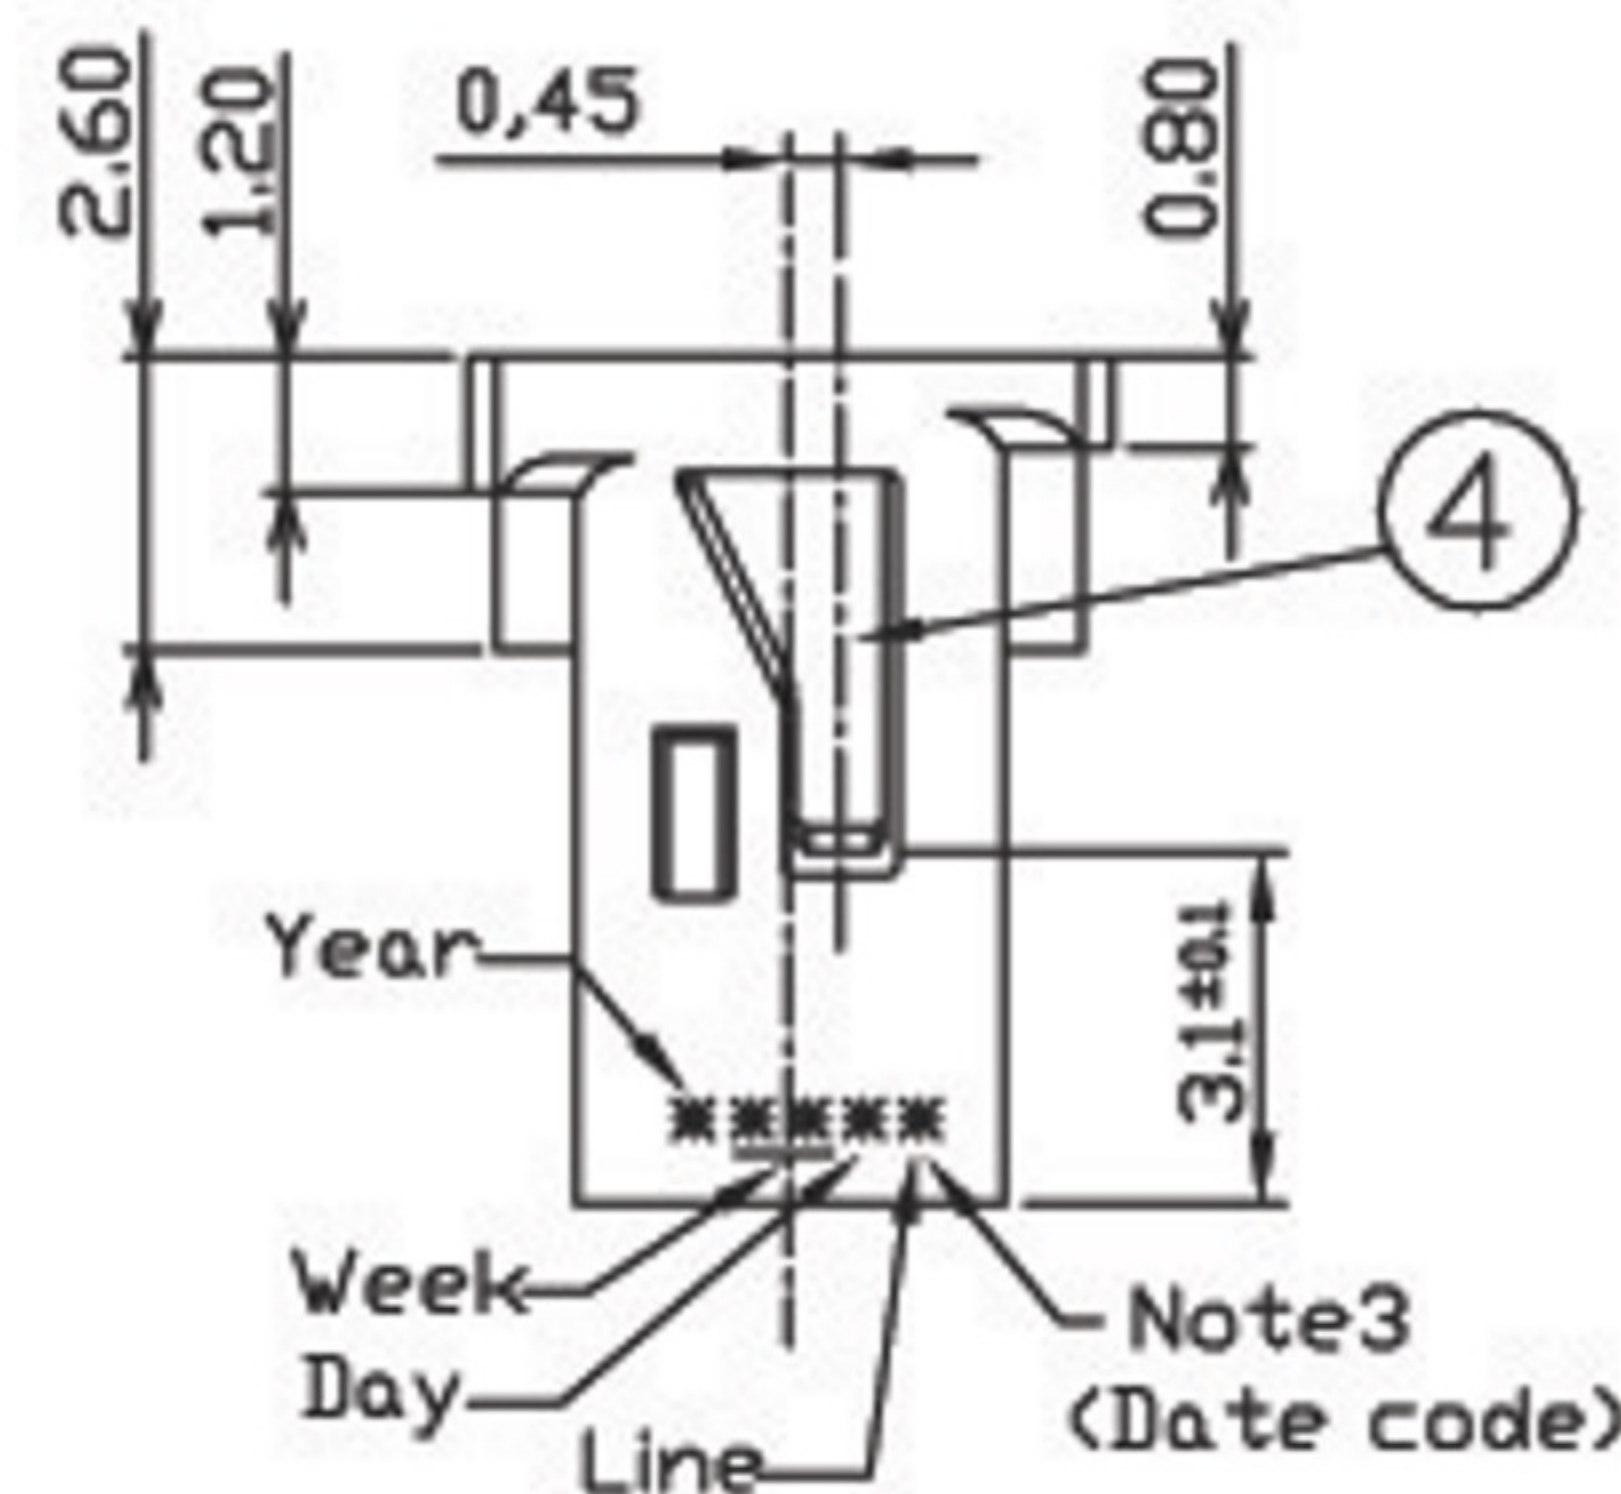
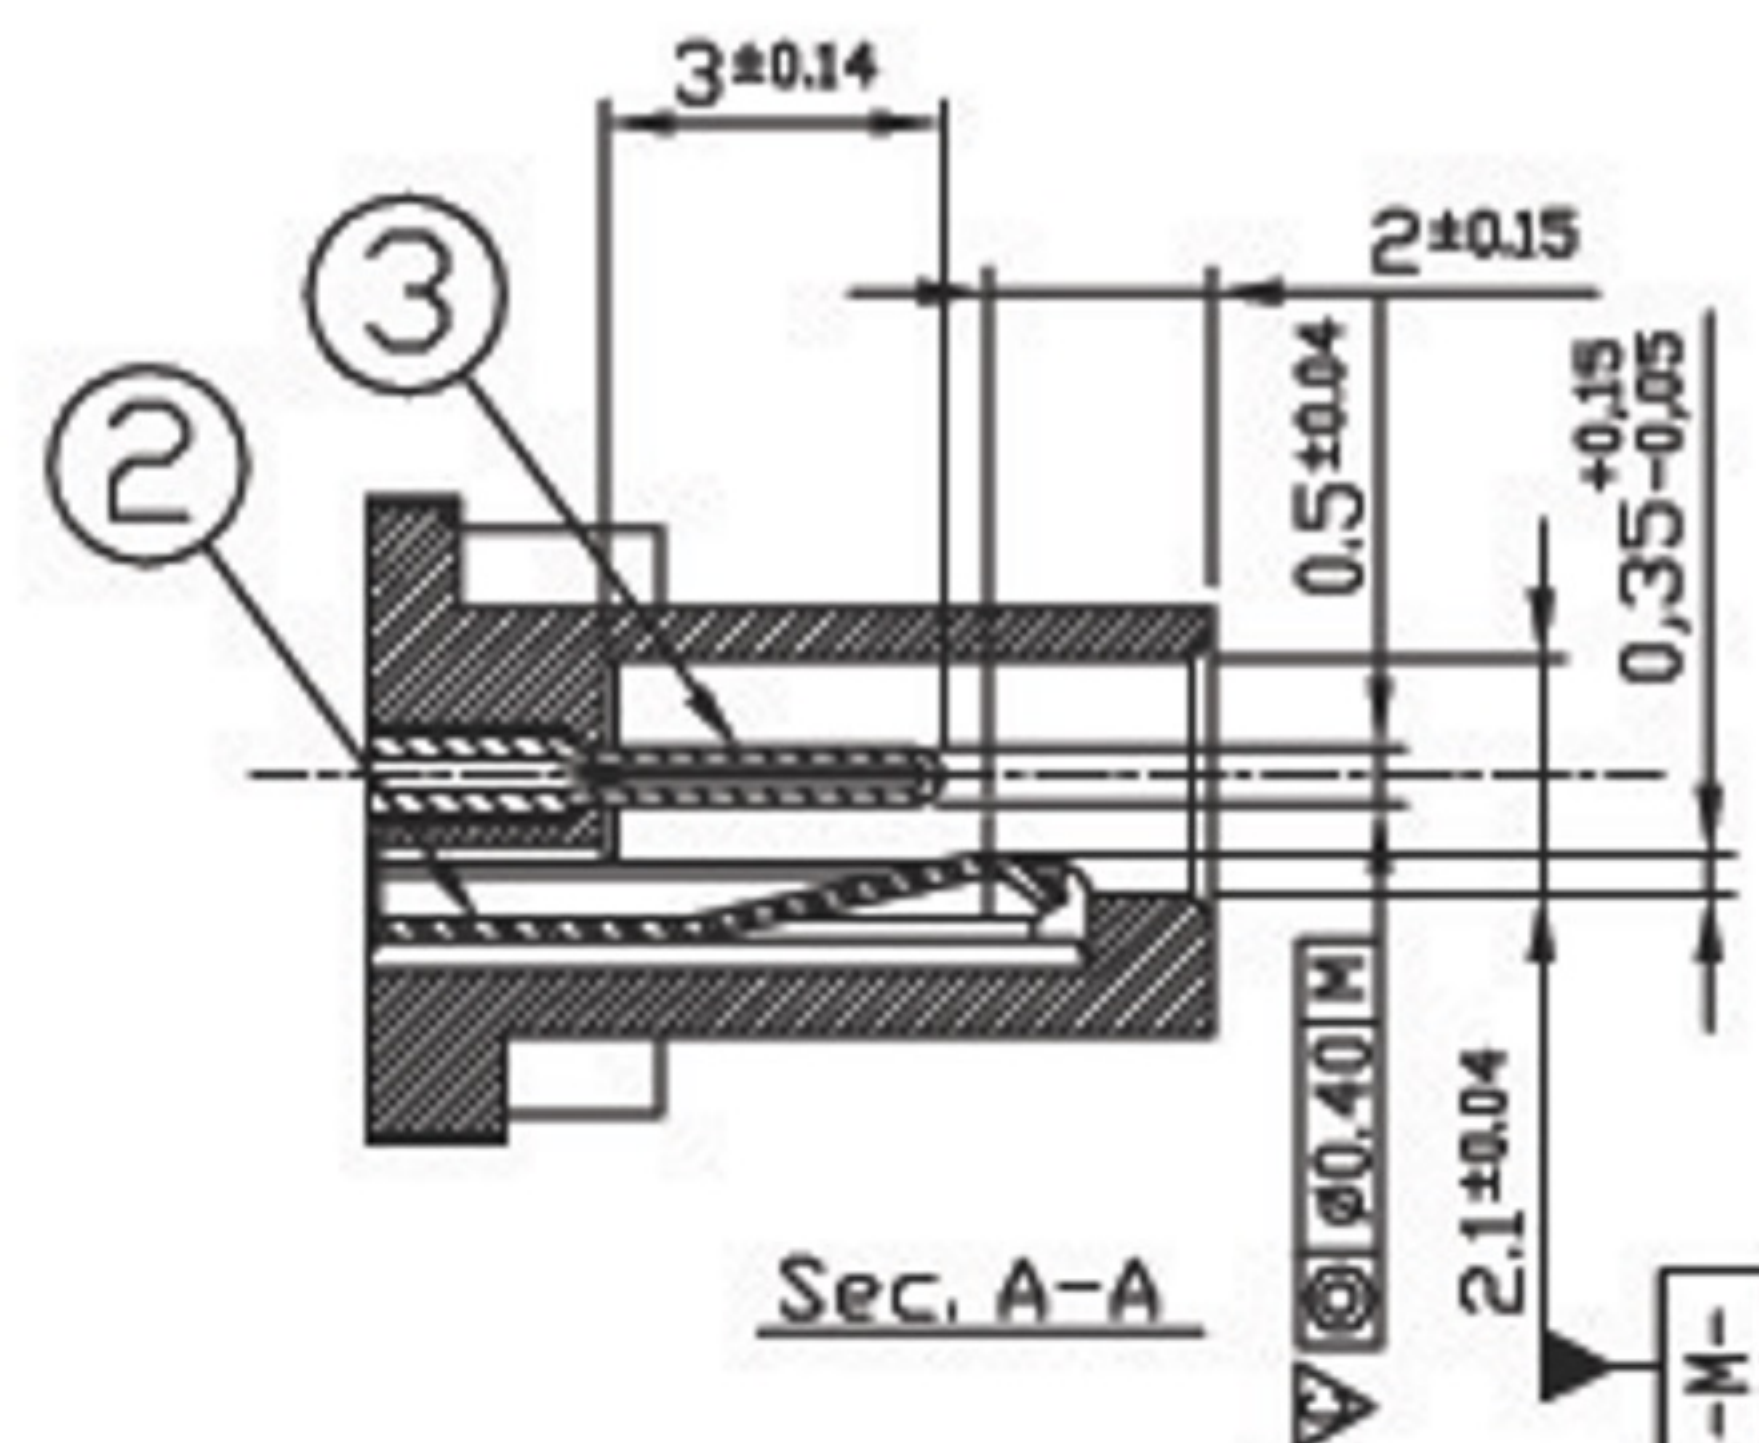
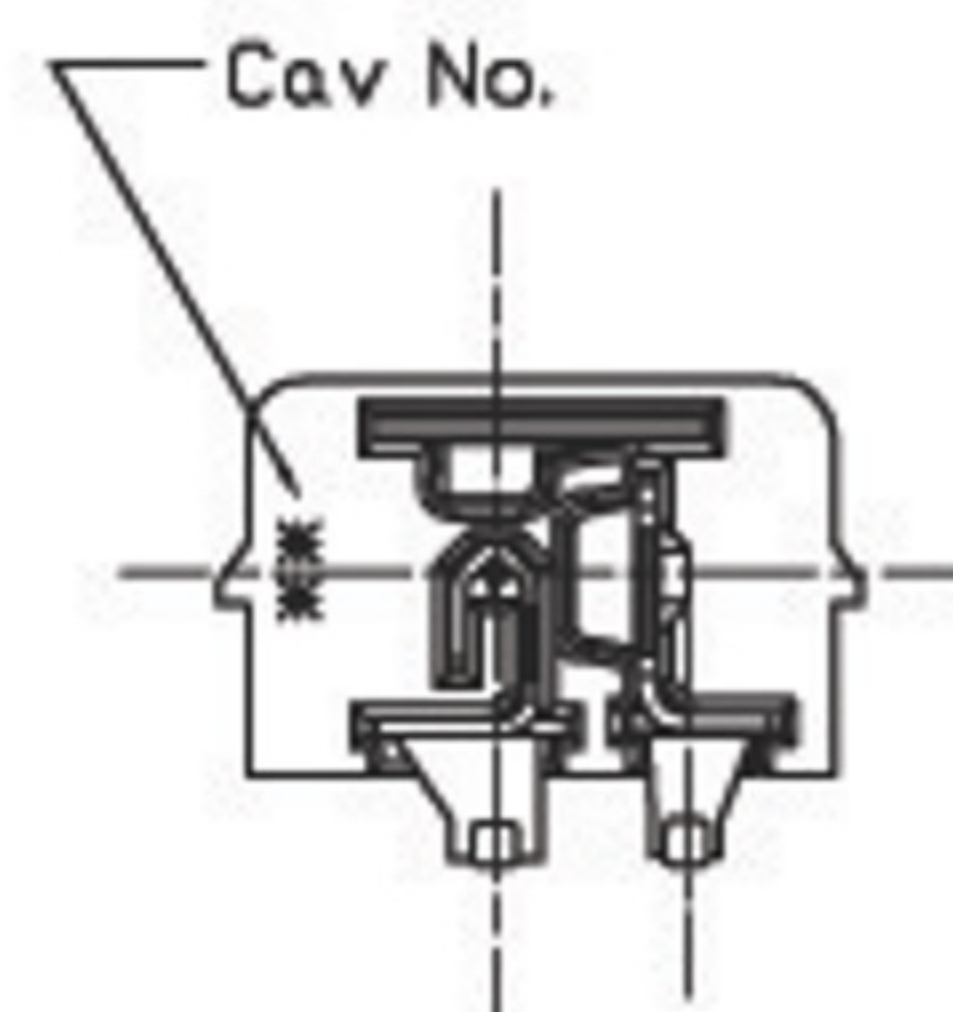
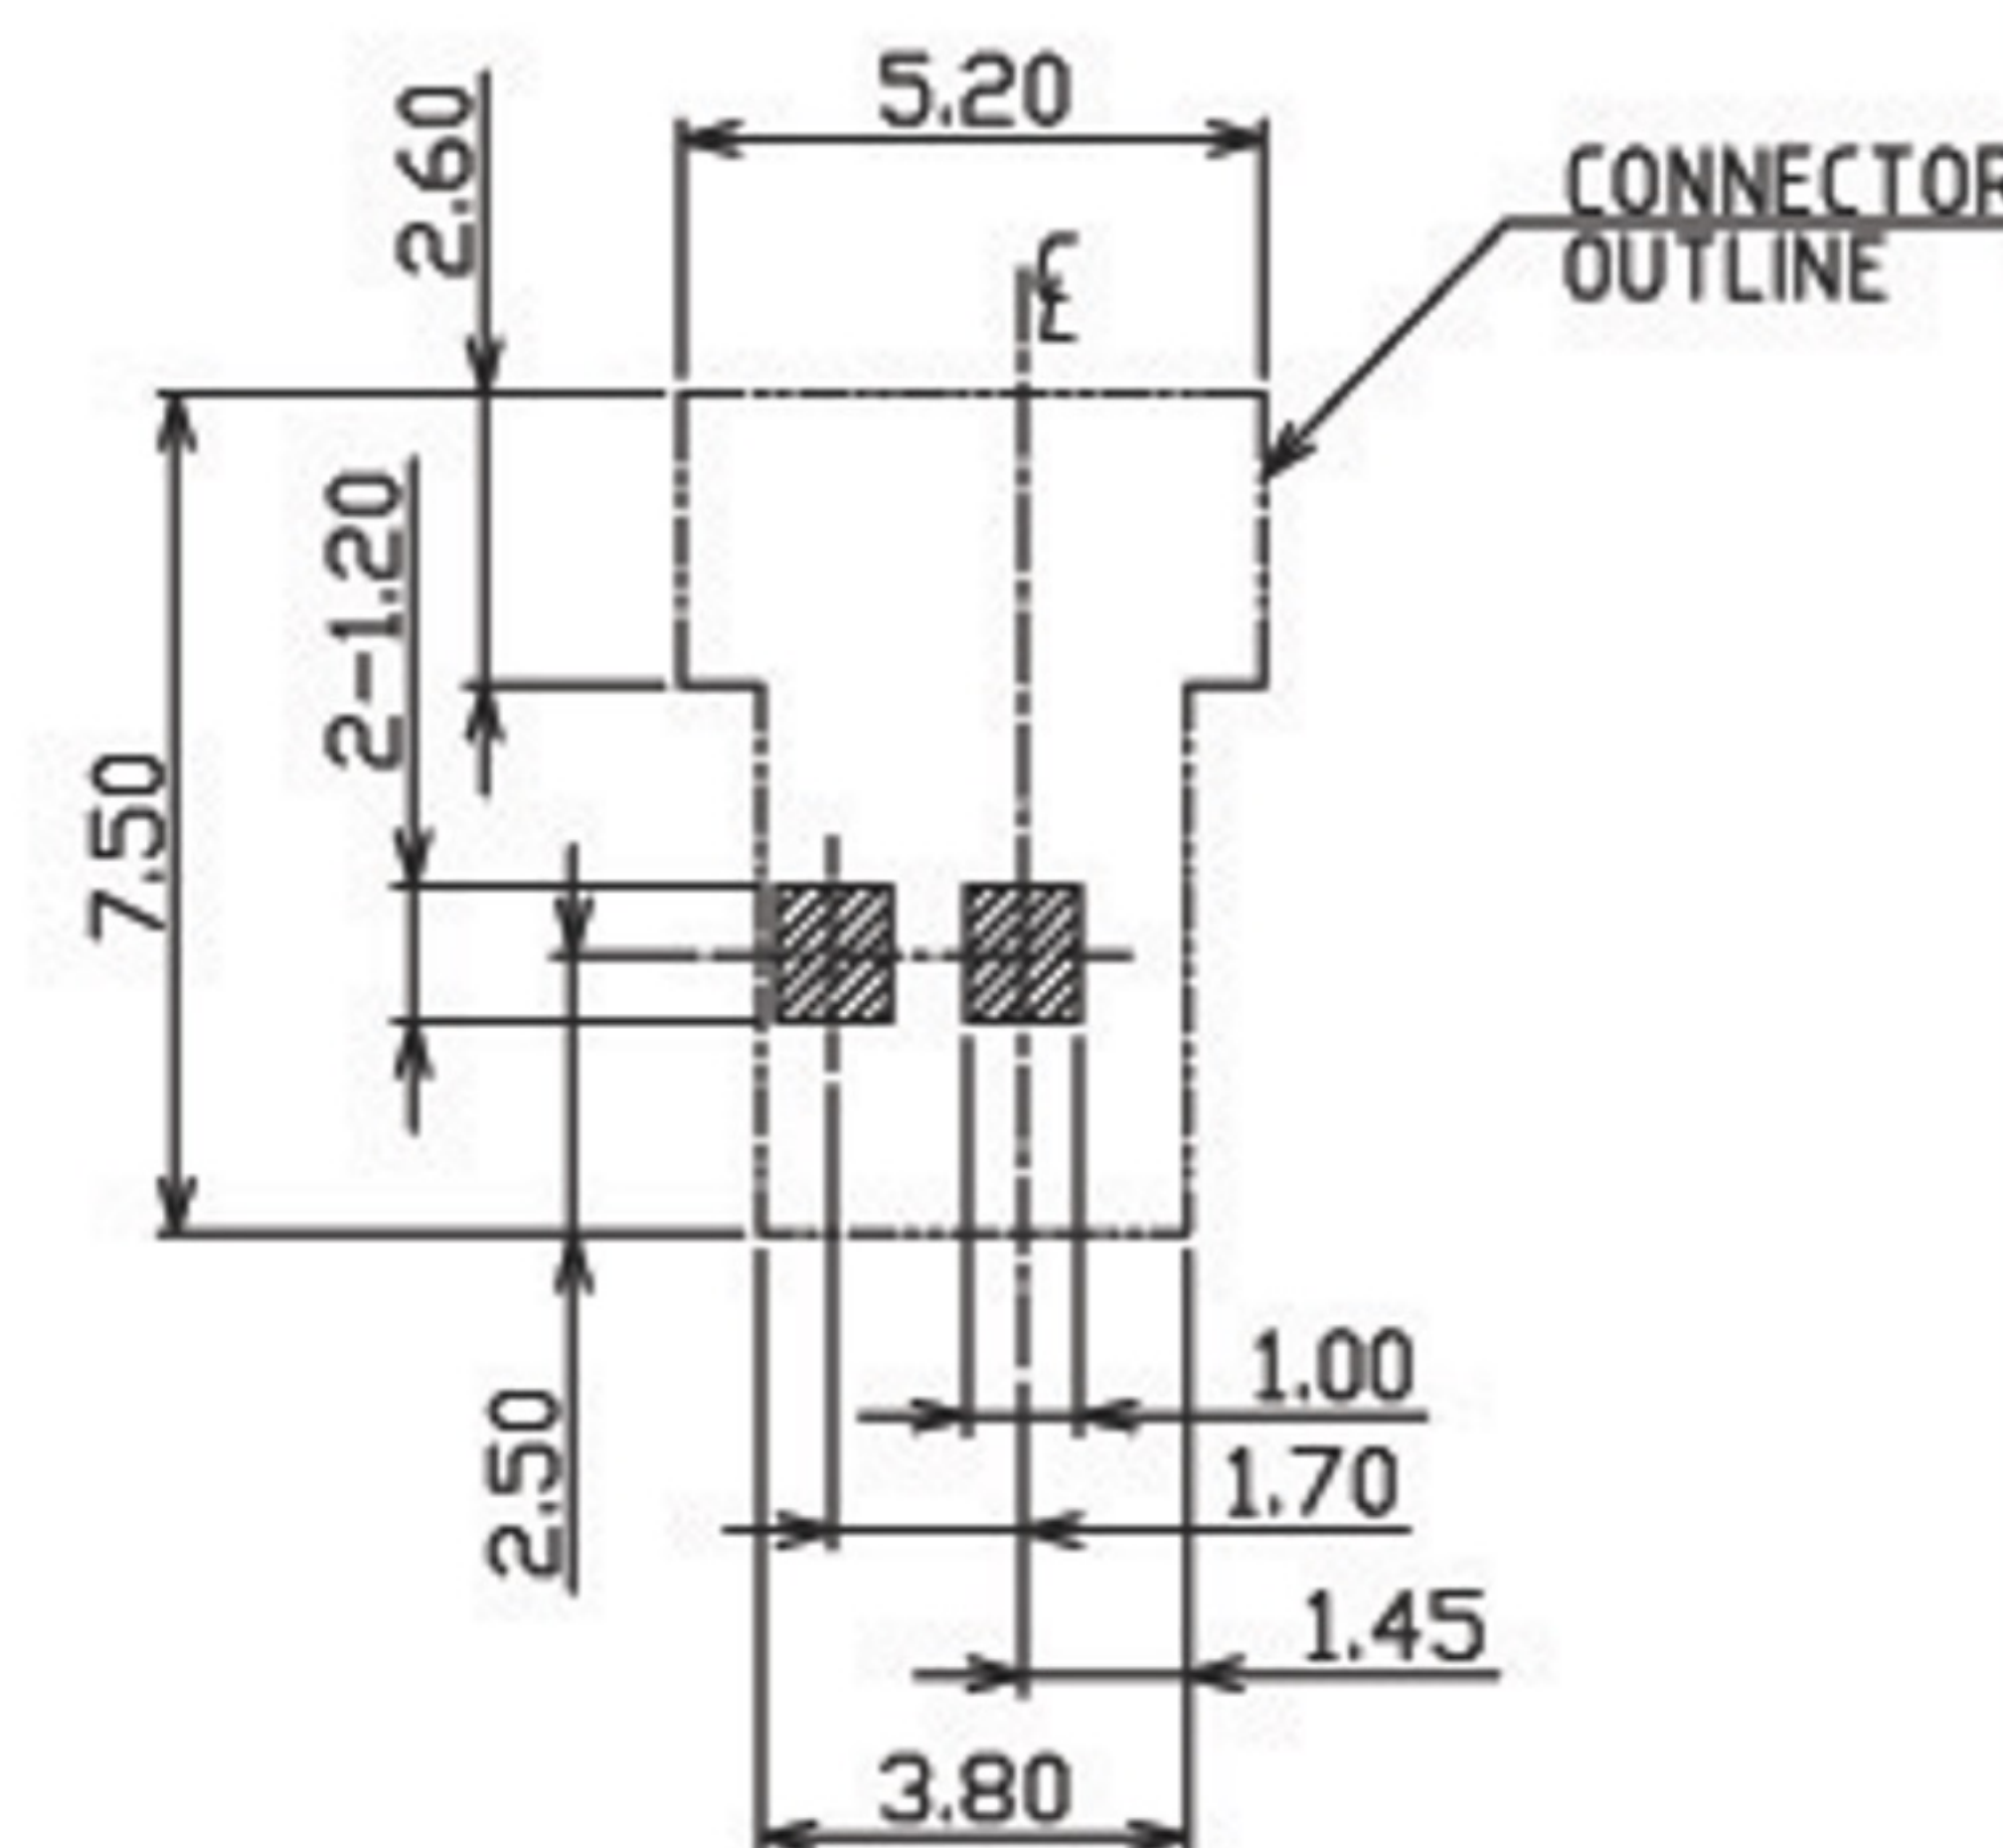
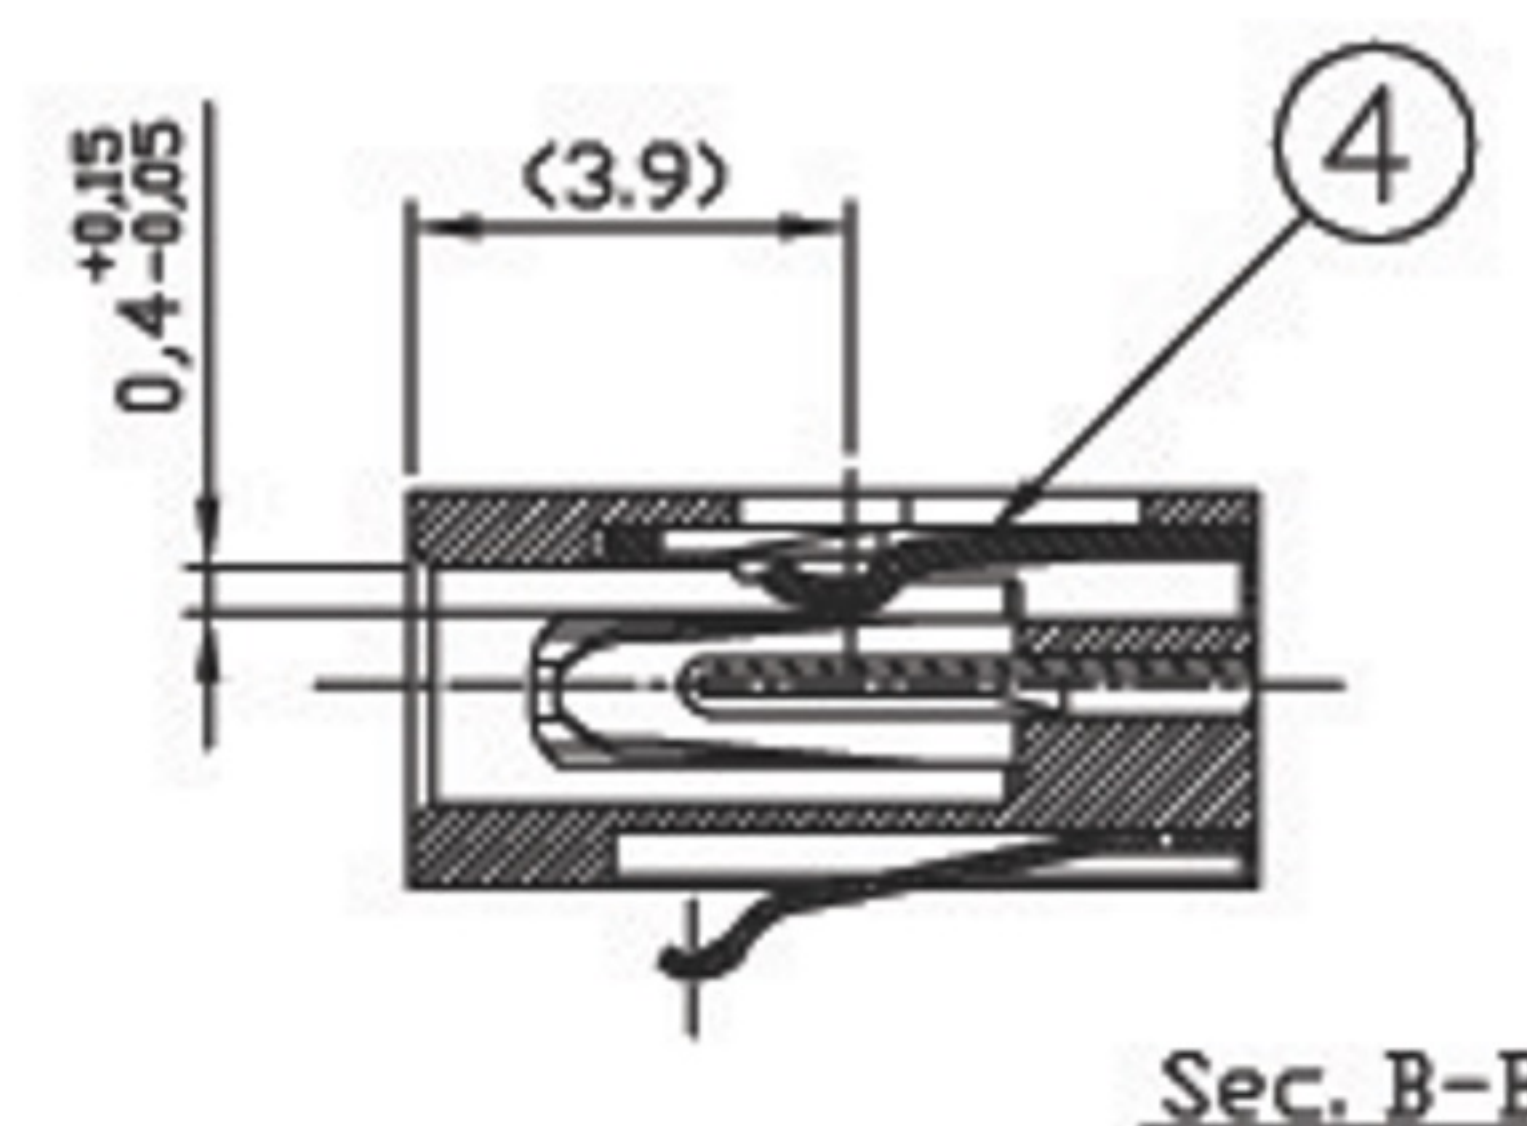


AUTOCAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11

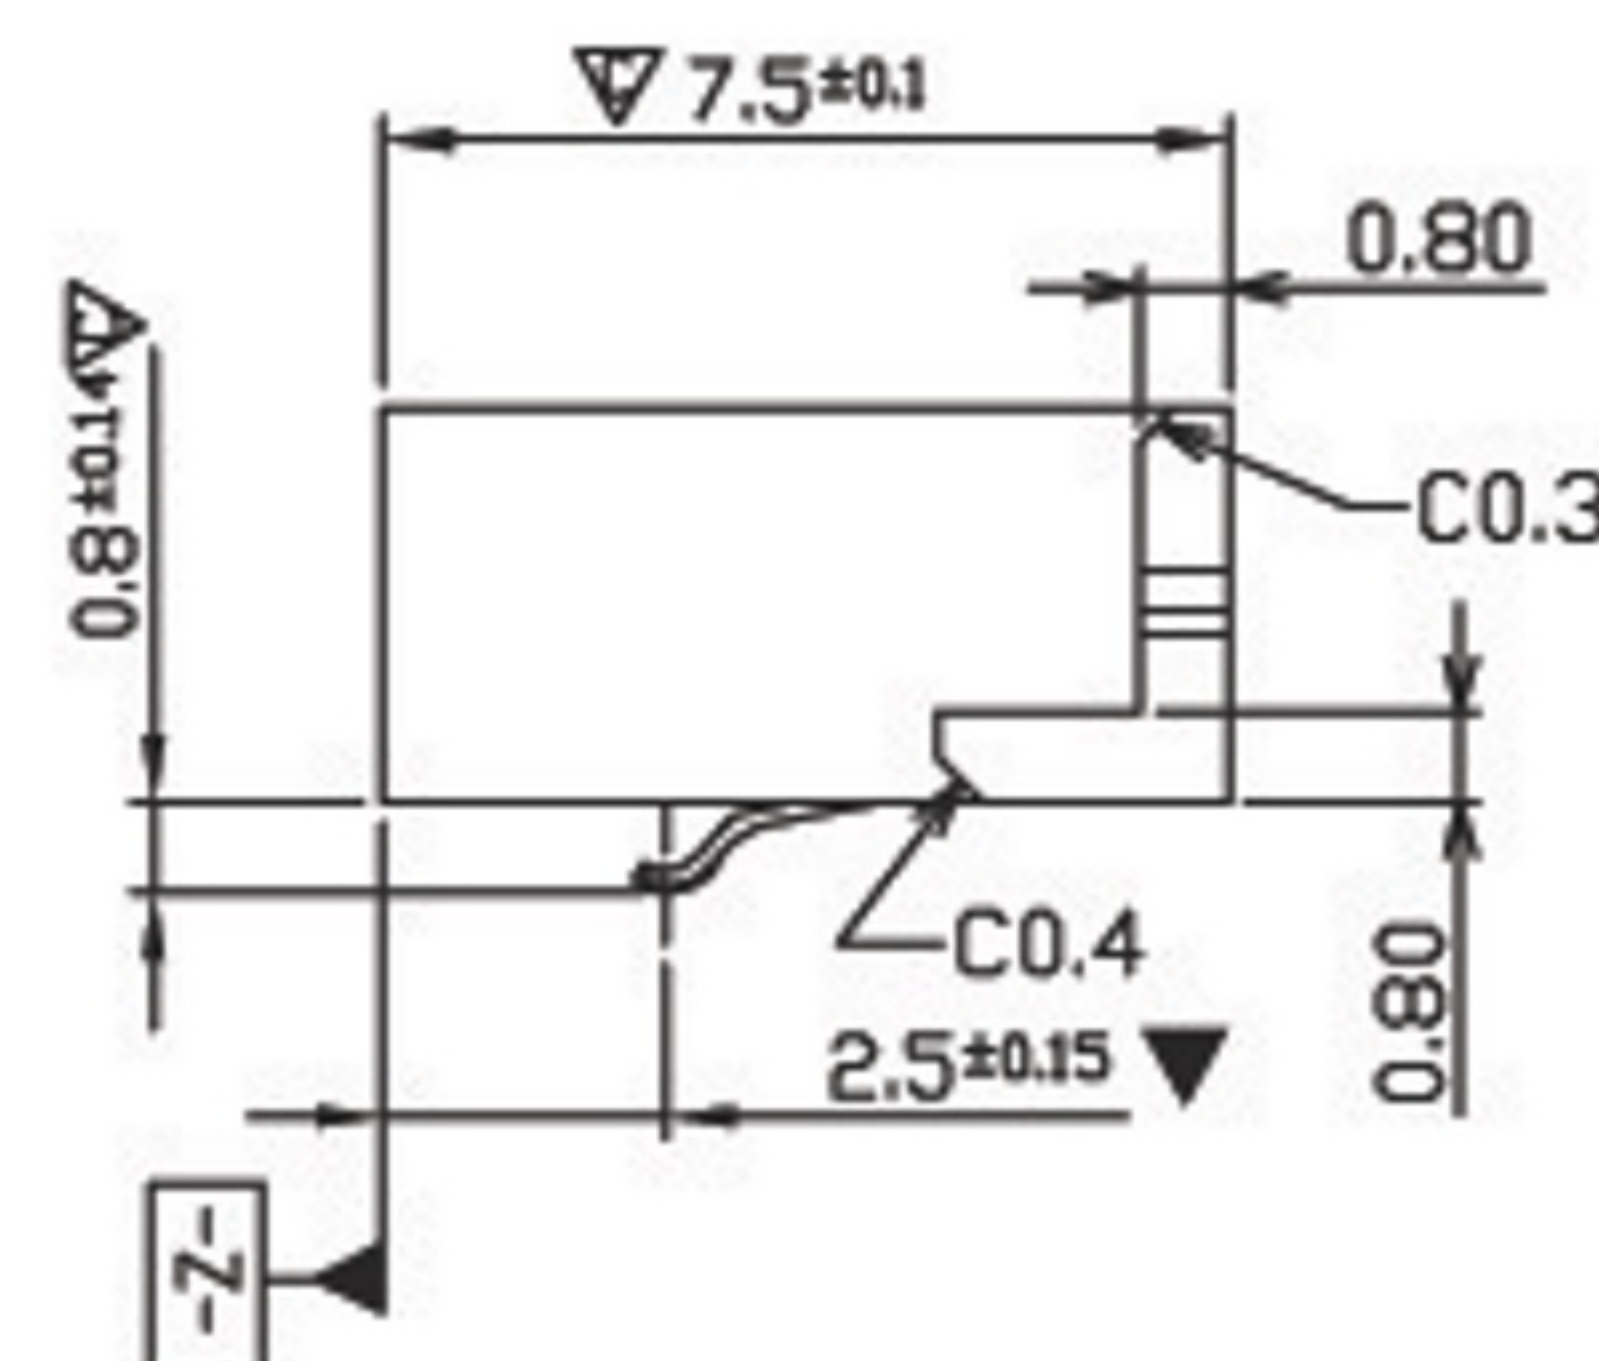

Isometric view
(Not scale)

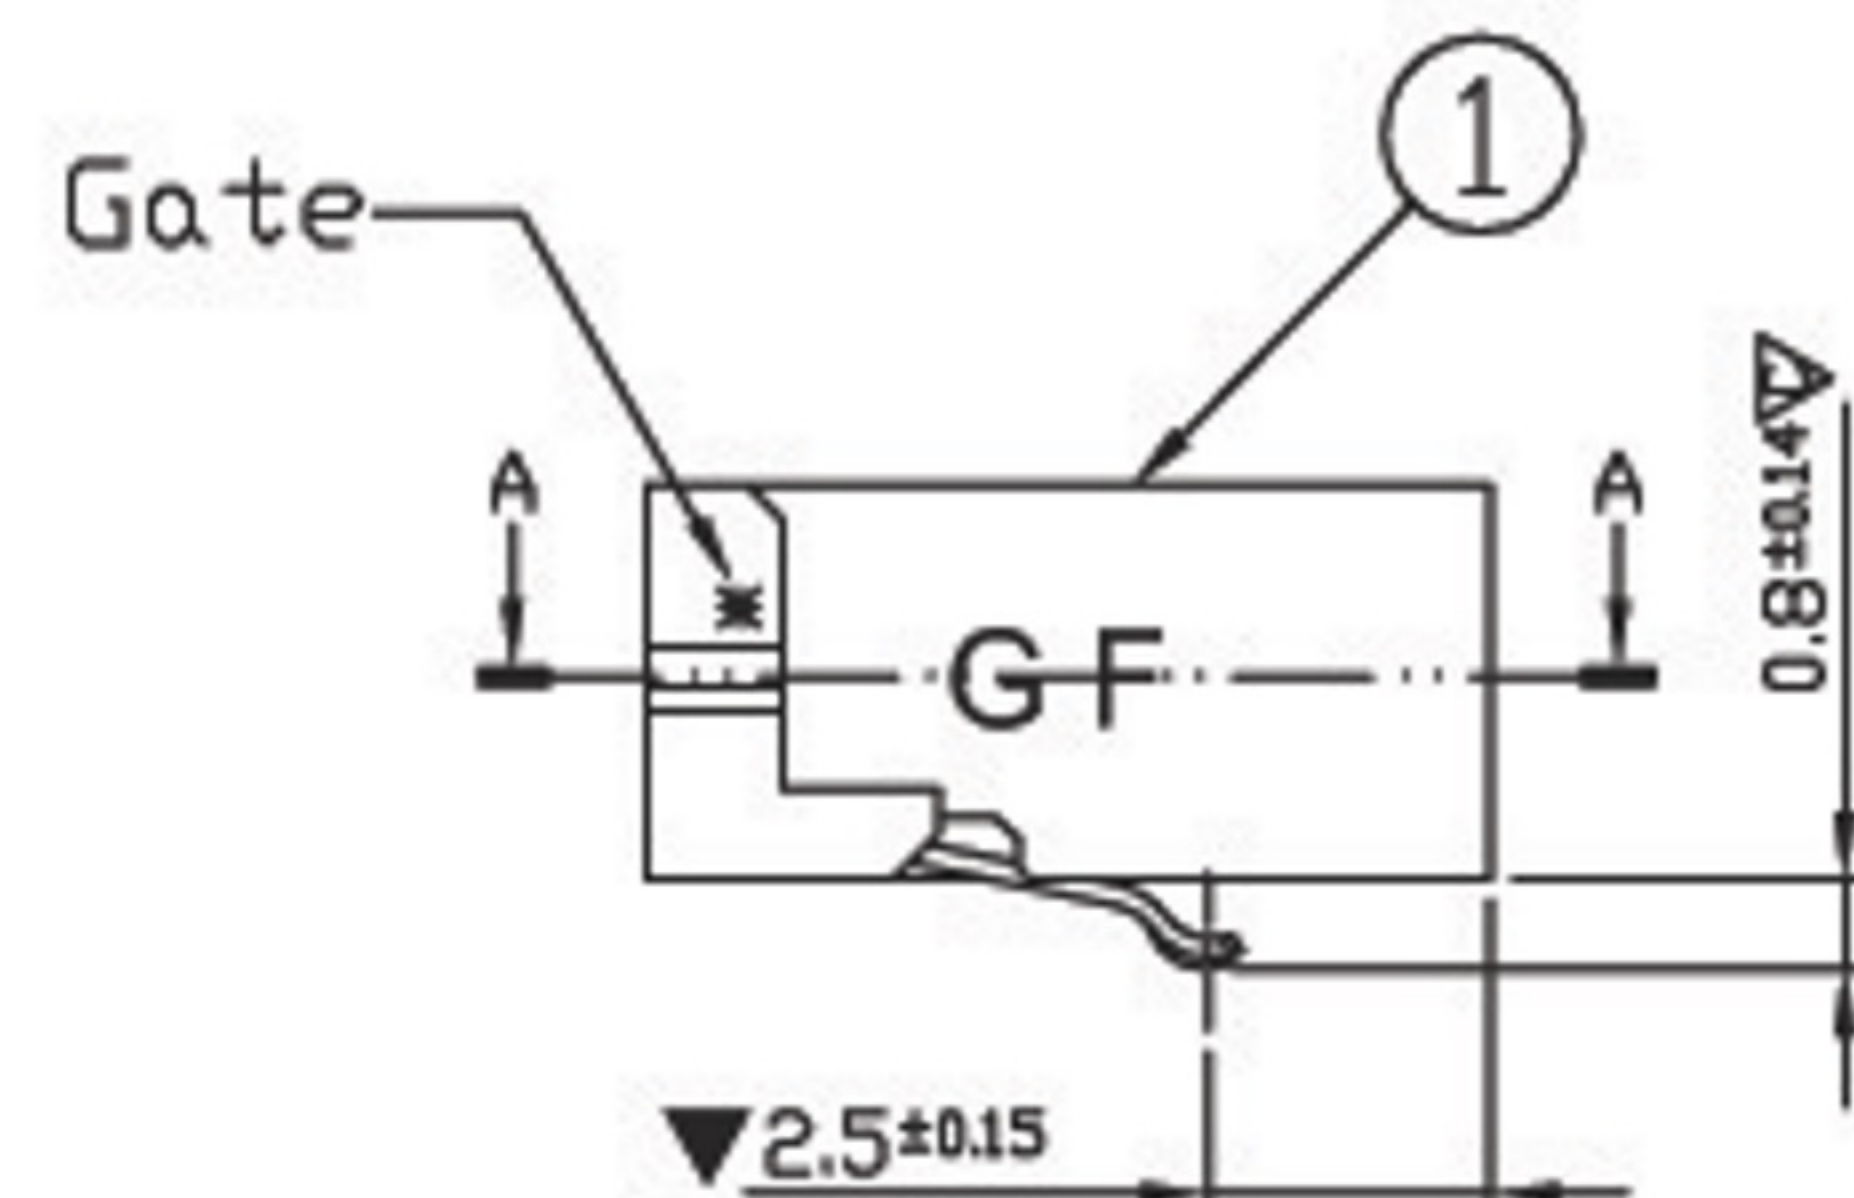

Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.
3. Date code to be printed in assembling process.

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.50
X.x ±0.30
X.xx ±0.20
X.xxx ±0.10
ANGULAR ±3°

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	DATE:	TITLE:
CHECKED:	DATE:	DC POWER JACK CONNECTOR
APPROVED:	DATE:	
PART NO. XB-DCJR0021-F02G1BR-B	REV.: B	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1