
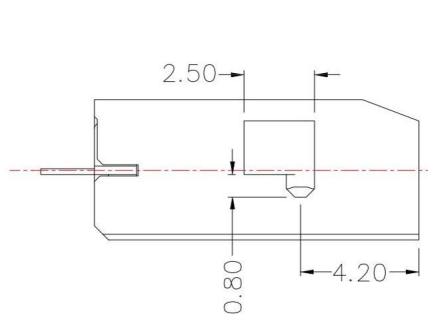






MODEL NO.	DC-097DH
SCHEMATIC	
CENTER PIN	ø0.65mm



A DETAIL COPLANARITY

*MATERIAL

- TERMINAL 1 :BRASS
TERMINAL 2 PHOSPHOR BRONZE
TERMINAL 3 :BRASS
HOUSING :PA6T

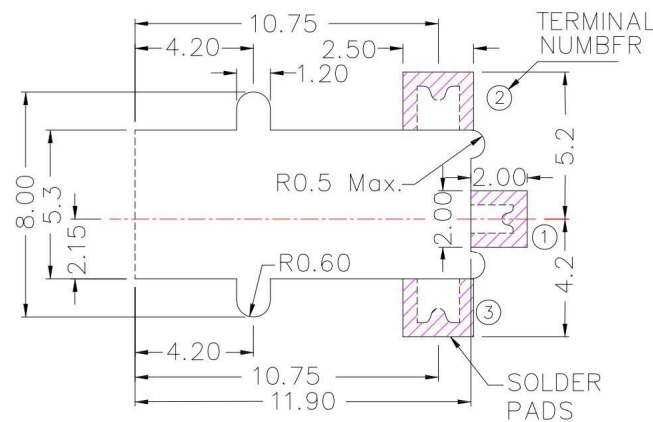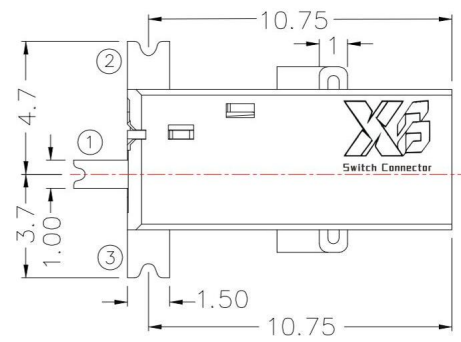

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

SPECIFICATION

- Rating : DC 16V 2.5A
- Contact resistance : $\leq 50m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/12/14			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	08/12/14			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-097DH-0.65
Tony Kao	08/12/14	1 : 1	PART NO.	DC-097DH-0.65
		SHEET NO.	1 of 1	
				SIZE A4
				VER R1

1	新增SPEC	Jack	081214
ITEM NO.	DESCRIPTION	DRAWN	DATE