


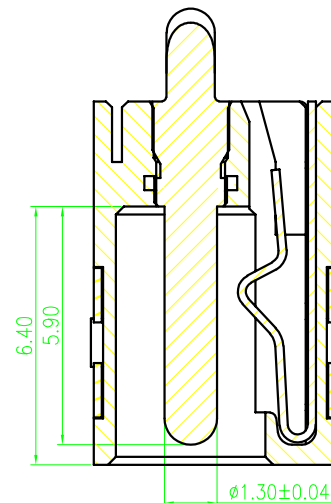
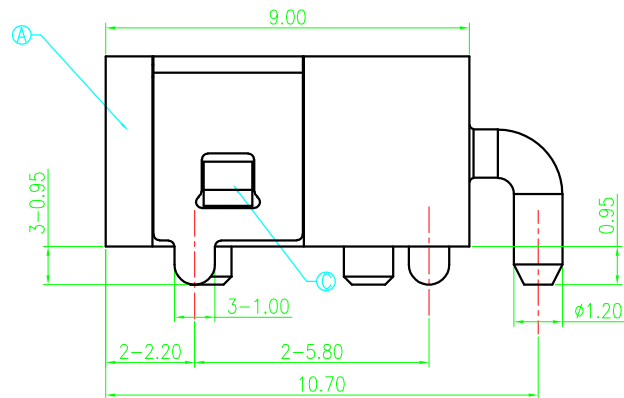
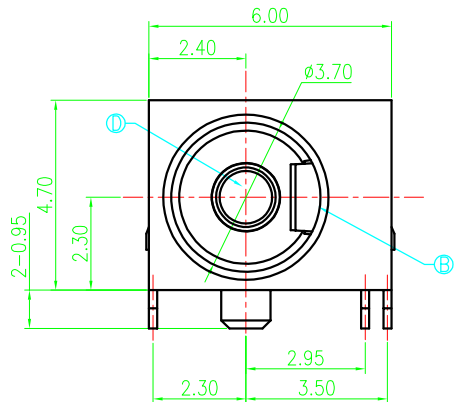
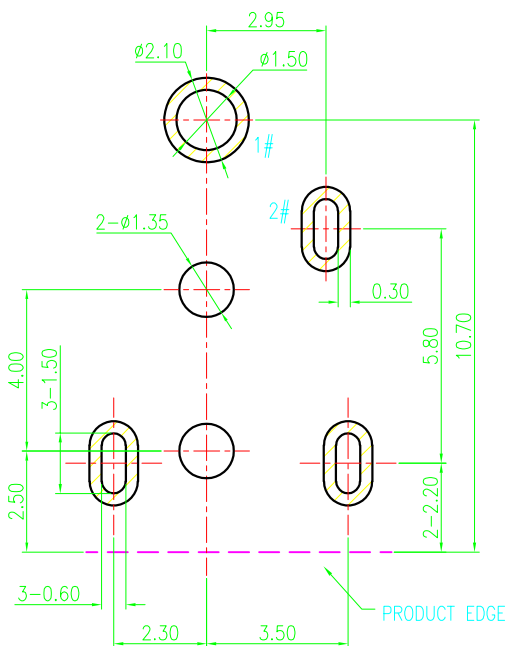


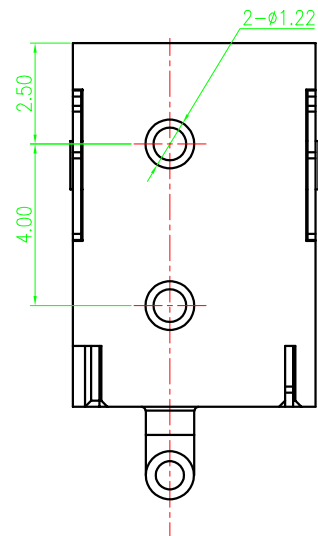

SECTION A-A

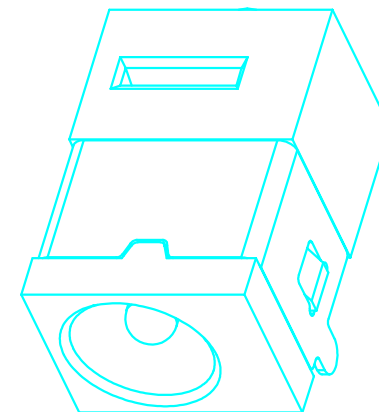


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

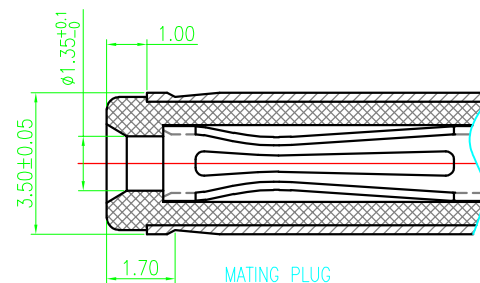

MATING PLUG

P/N.: DP350135-0120-60000H



SPECIFICATION

- 1.Rating : DC 12V, 3.0A;
- 2.Contact resistance: 30mΩ MAX;
- 3.Insulation resistance: 100MΩ MIN.;
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-20N
- 6.life test: 5,000 cycles.

D	PIN	1	HBi59	Gold flash/Ni
C	CURVE PIECE	1	SUS 304	Ni
B	SPRING	1	C5191	Sn/Ni
A	HOUSING	1	PA46 BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:		
DIM	TOL	DIM	TOL	CHECK:	2021.9.1	Φ3.50X1.35 卧式 DC POWER JACK		
X.	±0.50	X.	±2°		APPROVED	Andy	PART NO.	
X.X	±0.30	X.X	±1°				XB-DC350135-0832-20000H	
X.XX	±0.20	X.XX	——				SHEET: 1/1 REV.: A1	
X.XXX	±0.10	X.XXX	——	DRAWING NO				
				UNIT:	2021.9.1			
				mm				


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

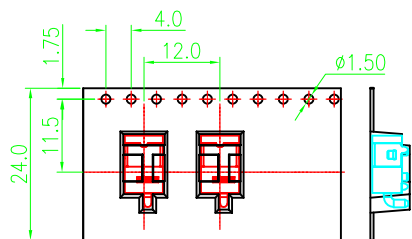


包装盘标签


总共10层





PE袋:



外箱,1PCS

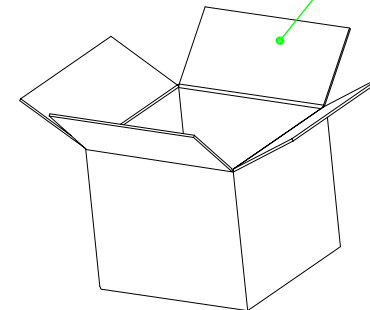

透明胶带

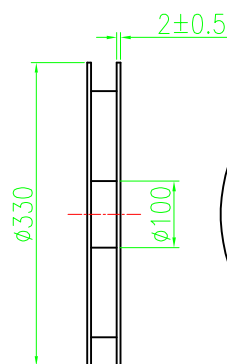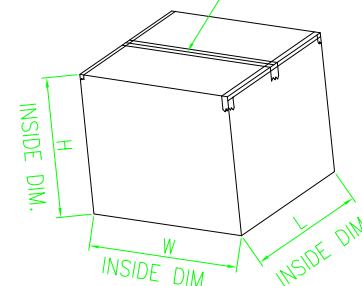


拉出方向

包装盘:外径 $\phi 330$;内径 $\phi 100$

拉出方向

覆盖带 350mm 最少.



备注:

- 材料规格:
 - 载带: $T=0.40\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
800PCS/卷, 10卷(8000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ (10~70gf);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2021.9.27	$\Phi 3.50$ 卧式 DC POWER JACK-包装图	
X.	///	X.	///	CHECK:		PART NO.	
X.X	///	X.X	///			XB-DC350135-0832-20000H	
X.XX	///	X.XX	///			SHEET: 1/1 REV.: A1	
X.XXX	///	X.XXX	///			DRAWING NO	
3RD ANGLE PROJECTION				UNIT: mm			
				APPROVED	Andy-Liu		
					2021.9.27		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8				
7				
6				
5				
4				
3				
2				
1				