

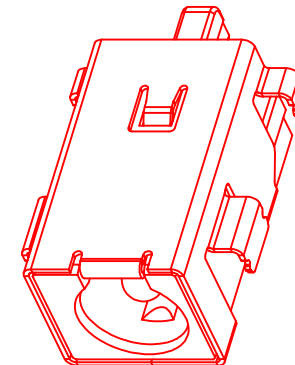
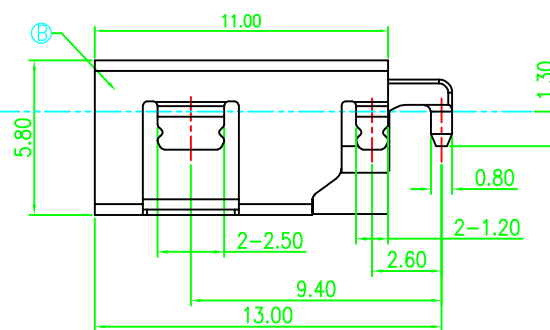
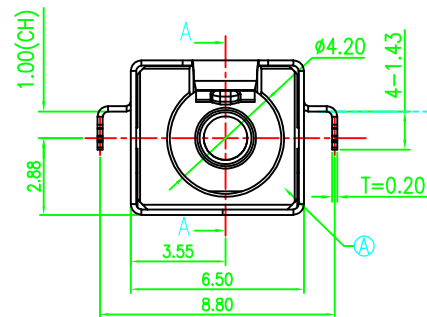


SECTION A-A


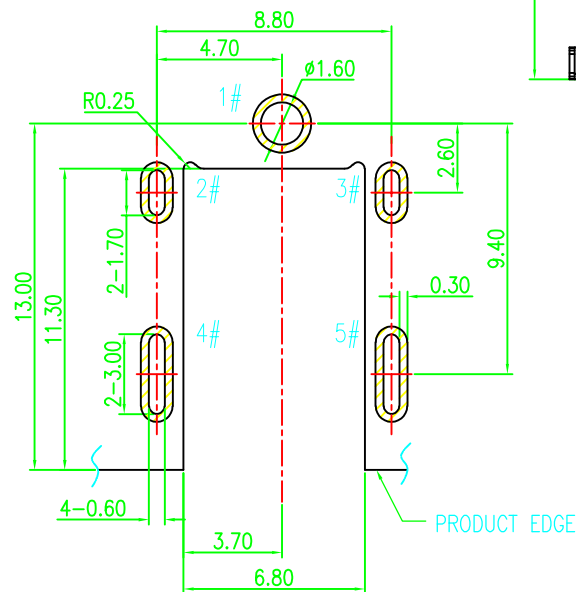


SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

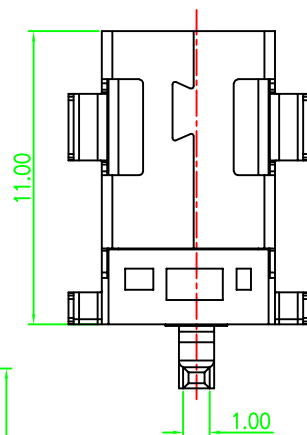

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

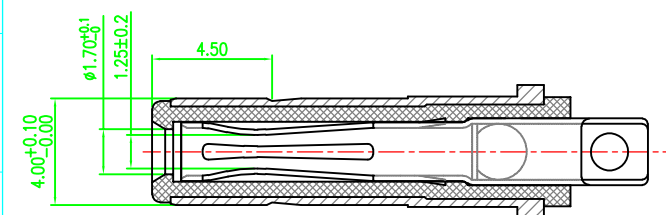

MATING PLUG
DP400170-0038-60000H

C	CENTER PIN	Zn ALLOY	GOLD FLASH/Ni 50u"	1
B	SHELL	COPPER ALLOY	Ni 50u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ4.0沉板式 (CH=-1.00) DC POWER JACK
DIM	TOL	DIM	TOL	CHECK:	2020.8.25	
X.	±0.50	X.	±2°	APPROVED	Andy-liu	PART NO. XB-DC400170-0690-30000H
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	—	DRAWING NO	2020.8.25	SHEET: 1/1 REV.: A1
X.XXX	±0.10	X.XXX	—			

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------